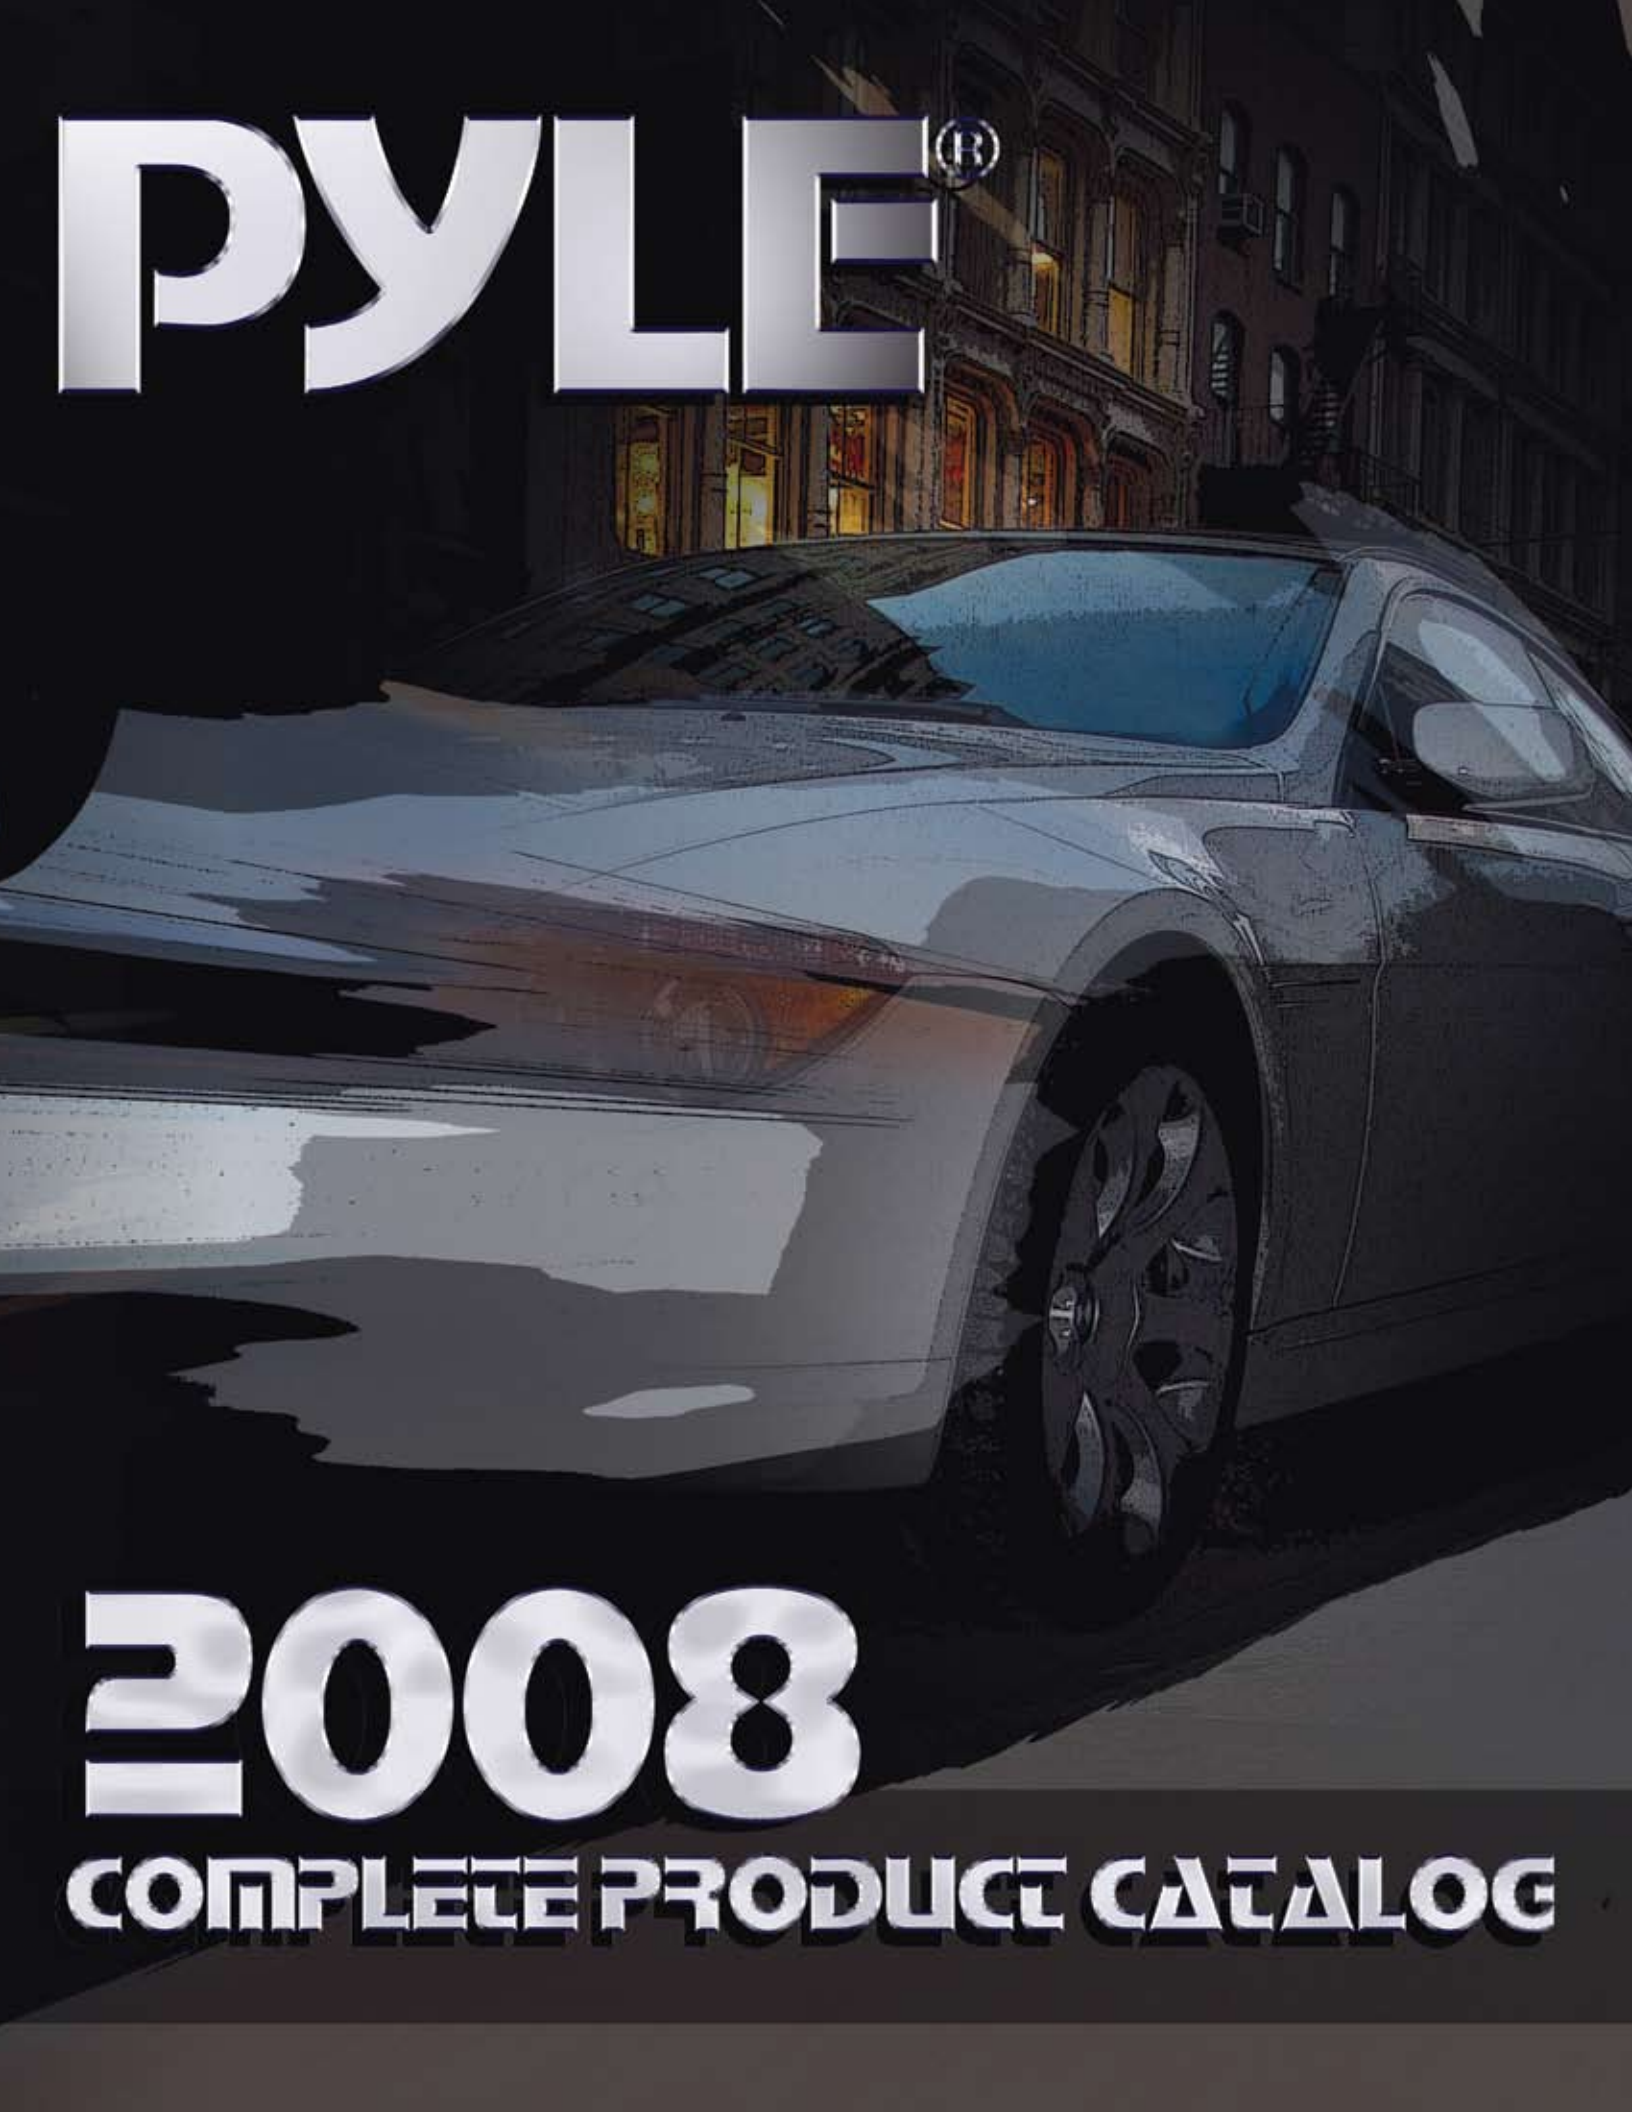
PYLE®
2008
COMPLETE PRODUCT CATALOG

PYLE® BLUETECH

PYLE GUIDE NAVIGATION

HYDRA SERIES

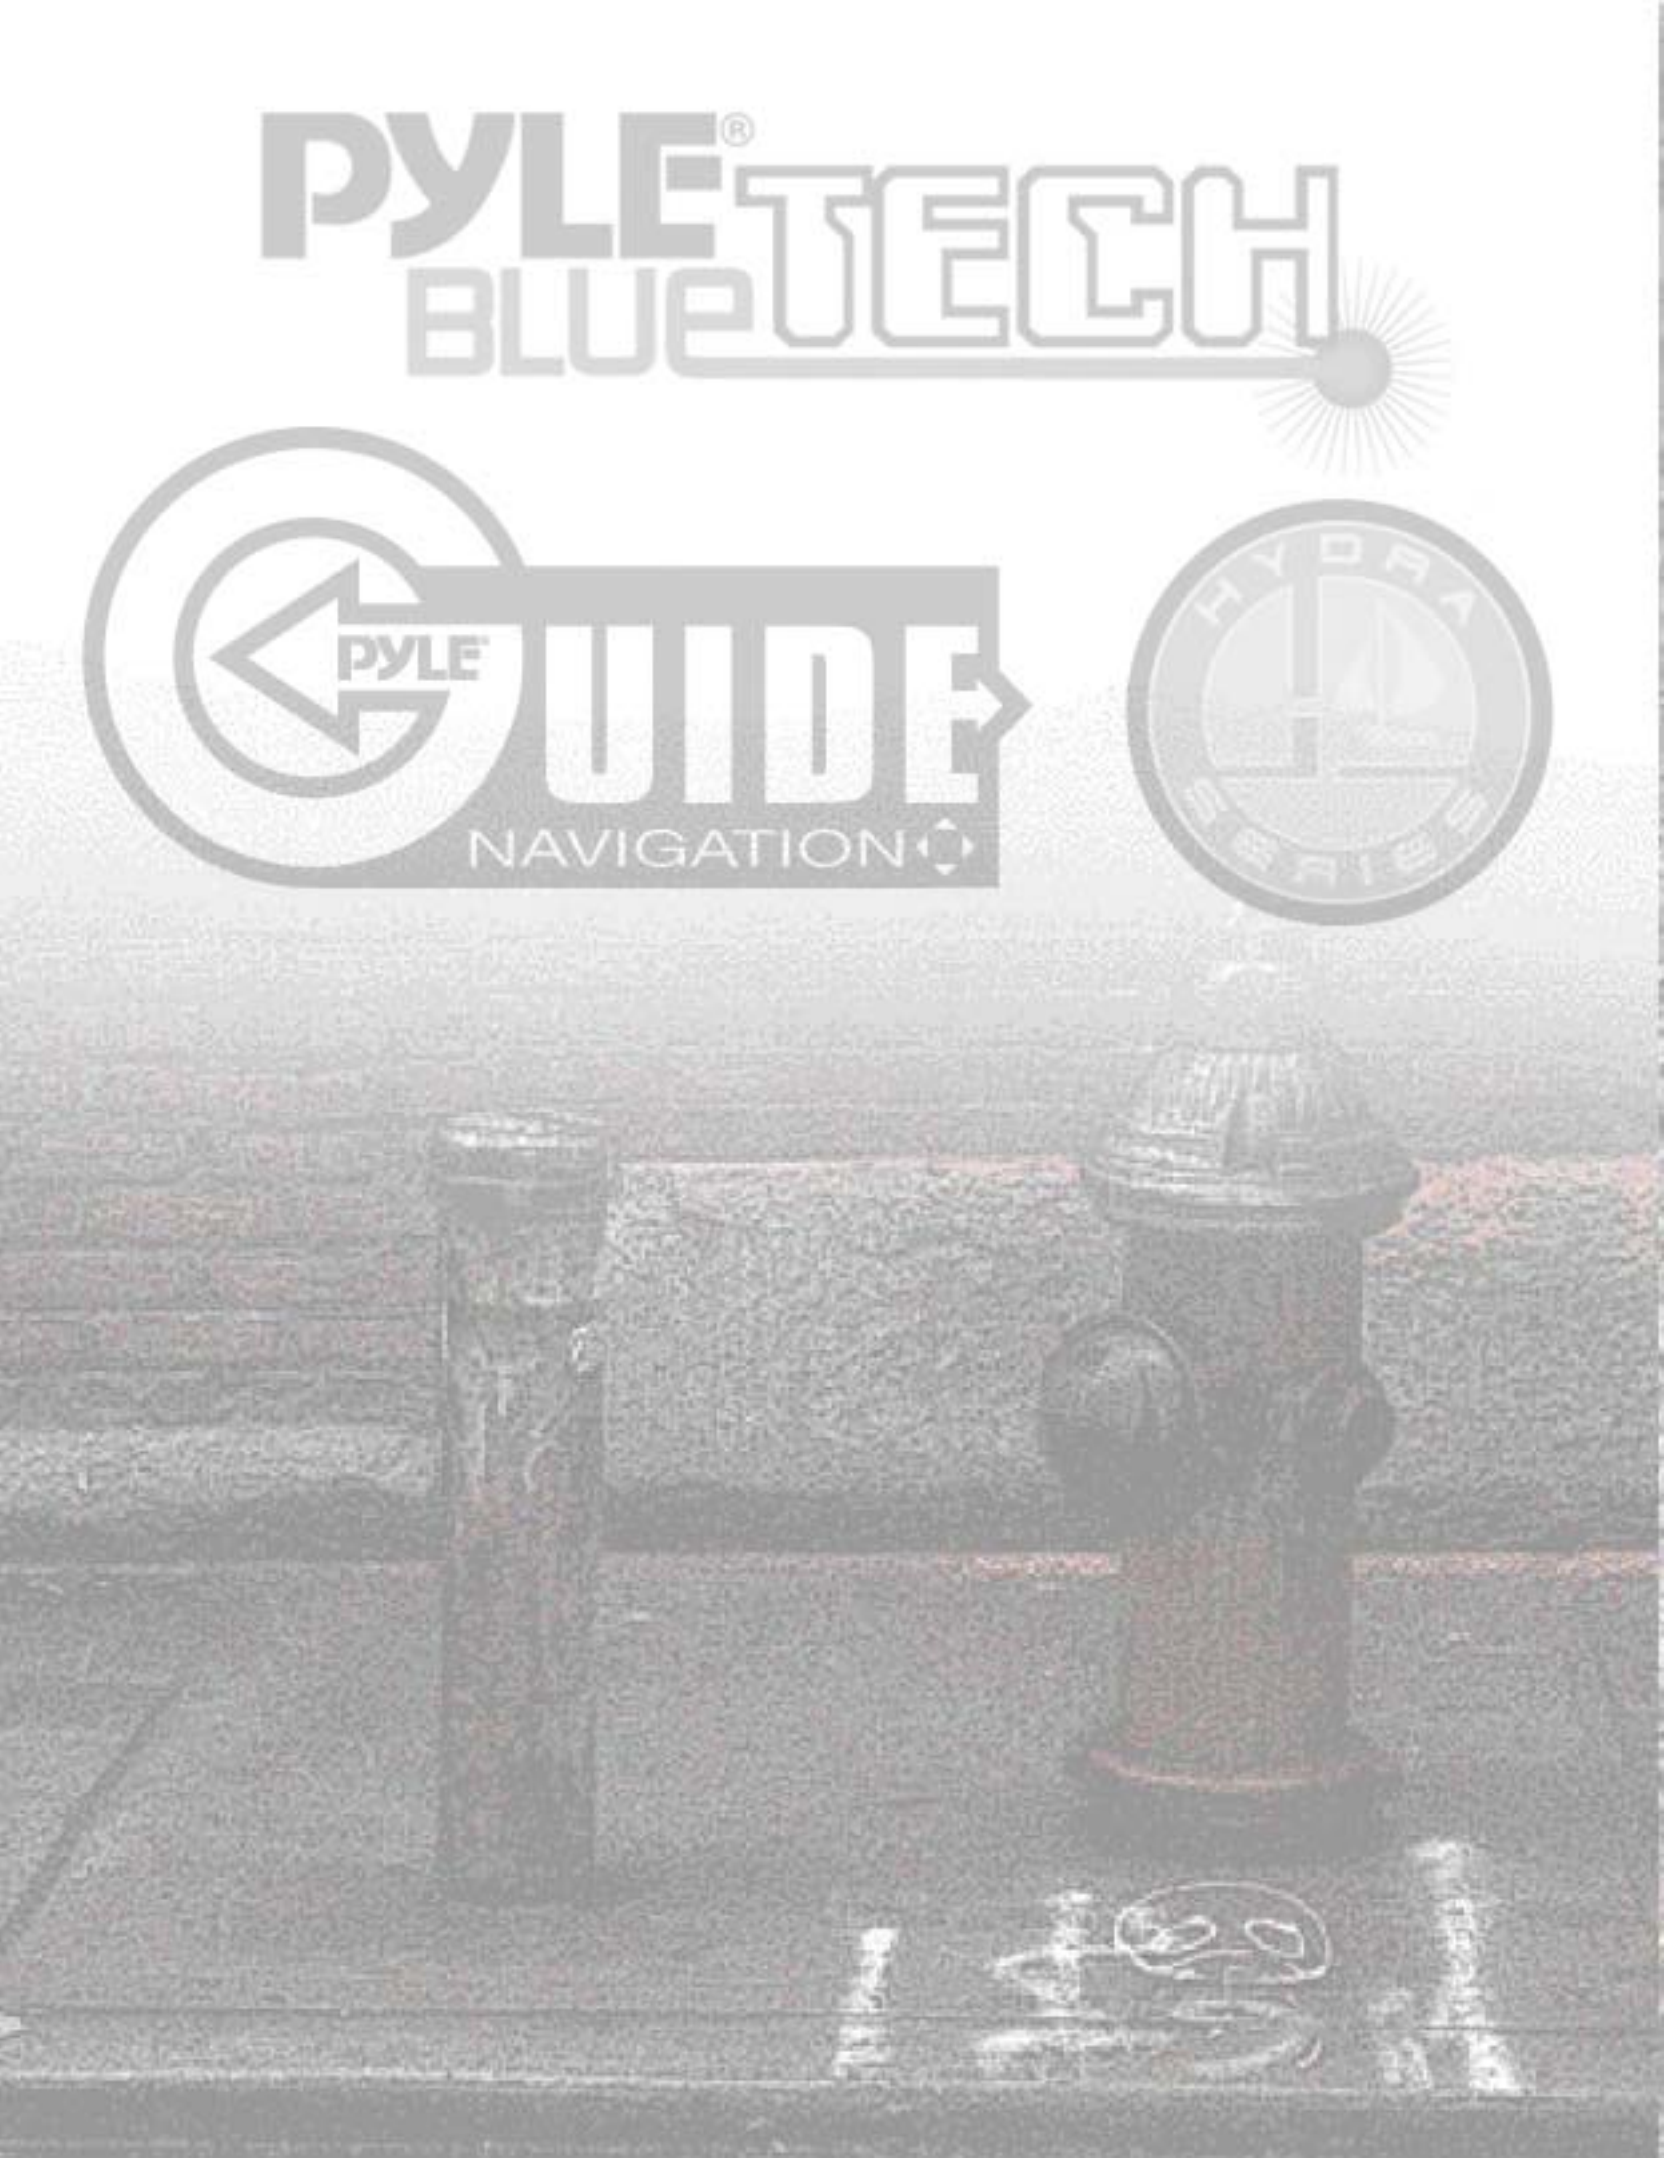

TABLE OF CONTENTS

Navigation Systems 4
DVD Players w/ Monitors 6
DVD Players 9
Roof Mount Monitors 11
Sun Visors 16
Rear Cameras & Mirror Monitor Systems 18
Mobile Video Accessories 19
Diversity Antennas/ Gaming System/ Wireless Headphone . . 21
Tuner System/ Universal Monitor Stands 22
Parking Sensor Systems 23
Security Systems 24
Bluetooth Devices 26
iPyle MP3 Player Accessories 27
Power Inverters 28
Power Supplies 29
CD Player Head Units 32
Signal Processors 35
Electric Crossovers 36
Amplifiers 37
Blue Label Speakers 44
Red Label Speakers 45
Chopper Series Speakers 46
Gear X Series Speakers 47
Driver Series Speakers 50
Plus Series Speakers 51
Blue Wave Speakers 52
Pyle Driver Series Speakers 53
Wave Series Speakers 54
Woofers 55
Bass Enclosures 59
Capacitors 62
Installation Kits 63
Installation Accessories 64
Marine Video Components 66
Marine Head Units 67
Marine Accessories 69
Marine Amplifiers/ Speakers 71
Marine Subwoofers 75
Marine RCA Cables 76
Bulbs & Lighting Accessories 77
LED & Neon Lighting 78
Halogen Lamp Kits 80
Lighting Accessories 81

PYLE®
2008

PLDNV66 6.5" Double Din Motorized Touch Screen TFT-LCD Monitorw/AM/FM Radio, CD/DVD/MP3/MMC Reader & GPS

- 6.5" 16:9 Wide Screen TFT-LCD Monitor Displays
- Touch Screen Compatible
- DVD/VCD/CD/CD-RW Compatible
- North America GPS Mapping Software
- SD Card Reader
- AM/FM Tuner
- Auto Memory Store/Preset/Scan
- 30 Preset Stations(18FM/12AM)
- Fully Motorized Audomatic Slide/Close Mechanism
- Adjustable Screen Angle Position
- On Screen Display
- Multi System(NTSC/PAL electable)
- RCA Pre-Amp Output/Scbwoofer Output
- Volume/Balance/Bass/Treble/Fader Control
- Max Output: 4 x 60 Watts
- Rear Monitor Video Output
- Parking Video Input
- Full Function Wireless Remote Control

PLTS79BTHD Touch Screen 7" Motorized TFT/LCD Monitor With DVD/CD/MP3/AM/FM/HD Radio/Bluetooth and Screen Dial Pad/Bluetooth/HD Radio

- 7" Inch 16:9 Wide Screen TFT/LCD Display
- Touch Screen (Graphic Screen Allows Easy Control Of Operations By Touch)
- NTSC & PAL Compatible
- Picture Control: Brightness/Contrast/Chroma/Hue
- Electronic Screen Angle/Position Memory
- SD/USB Function
- Repeat/Program/Random/Intro Play
- AM/FM Stereo Radio System
- Electronic Anti-Shock
- Auto Memory Store/Preset/Scan
- Support DVD/VCD/CD/MP3/WMA/JPG
- Parking Video Output
- 30 Preset Stations
- Blue-Tooth Function
- Auto Muting Feature, & Hands Free Talking Capabilities.
- HD Radio
- 4 Channel RCA Preamp Output/Subwoofer Output
- Card Size Full Function Remote Control

PLTS78UBT Touch Screen 7" Motorized TFT/LCD Monitor With DVD/CD/MP3/AM/FM/Bluetooth and Screen Dial Pad Bluetooth

- 7" Inch 16:9 Wide Screen TFT/LCD Display
- Touch Screen (Graphic Screen Allows Easy Control Of Operations By Touch)
- NTSC & PAL Compatible
- Picture Control: Brightness/Contrast/Chroma/Hue
- Electronic Screen Angle/Position Memory
- SD/USB Function
- Repeat/Program/Random/Intro Play
- AM/FM Stereo Radio System
- Electronic Anti-Shock
- Auto Memory Store/Preset/Scan
- Support DVD/VCD/CD/MP3/WMA/JPG
- Parking Video Output
- 30 Preset Stations
- Blue-Tooth Function
- Auto Muting Feature, & Hands Free Talking Capabilities.
- 4 Channel RCA Preamp Output/Subwoofer Output
- Card Size Full FUnction Remote Control
- 4X80 Watts.

PLTS76U Touch Screen 7" Motorized TFT/LCD Monitor With DVD/CD/MP3/AM/FM Player/SD-USB

- 7" Inch 16:9 Wide Screen TFT/LCD Display
- Touch Screen (Graphic Screen Allows Easy Control Of Operations By Touch)
- NTSC & PAL Compatible
- Picture Control: Brightness/Contrast/Chroma/Hue
- Electronic Screen Angle/Position Memory
- SD/USB Function
- Repeat/Program/Random/Intro Play
- AM/FM Stereo Radio System
- Electronic Anti-Shock
- Auto Memory Store/Preset/Scan
- Support DVD/VCD/CD/MP3/WMA/JPG
- Parking Video Output
- 30 Preset Stations
- 4 Channel RCA Preamp Output/Subwoofer Output
- Card Size Full Function Remote Control
- 4X80 Watts.

PLTS75 Touch Screen 7" Motorized TFT/ LCD Monitor w DVD/ CD/ MP3 Player & AM/ FM

- 7" 16:9 Wide Screen TFT LCD Display
- Touch Screen (Graphic Screen Allows Easy Control of Operations by Touch)
- DVD/ MP3/ VCD/ CD/ CD-RW Compatible
- Auto Memory Store/ Preset Scan
- 30 Preset Stations Memory
- Fully Motorized Automatic Open/ Close Mechanism
- Electronic Screen Angle/ Position Memory
- Last Position/ Scene Memory
- On Screen Display
- Multi System (NTSC/ PAL Selectable)
- 4 Channel RCA Pre Amp Output/ Subwoofer Output
- Electronic Volume/ Balance/ Bass/ Treble/ Fader Control
- MAX Output: 60Watts x 4 Channels
- Rear Monitor Video Output
- Parking Video Input
- Full Function Wireless Remote Control

PLTSD7BT Double Din Touch Screen 7" TFT-LCD Monitor w/DVD/CD/ MP3 Player/AM/FM/Bluetooth

- 7" 16:9 Wide Screen TFT-LCD Monitor Displays
- Touch Screen Compatible
- DVD/MP3/VCD/CD/CD-RW Compatible
- AM/FM Tuner
- Auto Memory Store/Preset Scan
- 30 Preset Stations (18FM/12AM)
- On Screen Display
- Multi System (NTSC/PAL Selectable)
- 4 Channel RCA Pre-Amp Output/Subwoofer Output
- Electronic Volume/Balance/Bass/Treble/Fader Control
- Max Output: 4x80 Watts
- Rear Monitor Video Output
- Parking Video Input
- Full Function Wireless Remote Control

PLTSD65 Double Din Touch Screen 6.5" Motorized TFT-LCD Monitor w/DVD/CD/MP3 Player & AM/FM/TV Tuner

- 6.5" 16:9 Wide Screen TFT-LCD Monitor Displays
- Touch Screen Compatible
- DVD/MP3/VCD/CD/CD-RW Compatible
- AM/FM Tuner
- Auto Memory Store/Preset Scan
- 30 Preset Stations (18FM/12AM)
- Fully Motorized Automatic Slide/Close Mechanism
- Adjustable Screen Angle Position
- Last Position/Scene Memory
- On Screen Display
- Multi System (NTSC/PAL Selectable)
- 4 Channel RCA Pre-Amp Output/Subwoofer Output
- Electronic Volume/Balance/Bass/Treble/Fader Control
- Max Output: 4x60 Watts
- Rear Monitor Video Output
- Parking Video Input
- Built-in TV Tuner
- Full Function Wireless Remote Control

PLTSD62 Double DIN Touch Screen 6.5" TFT LCD Monitor w/ DVD/ CD/ MP3/ USB & AM/FM

- 6.5" 16:9 Wide Screen TFT-LCD Monitor Display Touch Screen Compatible
- DVD/MP3/VCD/CD/CD-RW Compatible
- AM/FM Tuner
- Support Outer USB Playback
- Auto Memory Store/ Preset Scan
- 36 Preset Stations (18FM/ 18M)
- Last Position/ Scene Memory
- On Screen Display
- Multi System (NTSC/PAL Selectable)
- 4 Channel RCA Pre-Amp Output/Subwoofer Output
- Volume/ Balance/ Bass/ Treble/ Fader Control
- Max Output: 4 x 80 Watts
- Rear Monitor Video Output
- Parking Video Input
- Full Function Wireless Remote Control

PLNVB26 Universal GPS Navigation System & Touch Screen Compatible

- Windows CE. 4.2
- CPU: 400 MHz Samsung 2440
- SDRAM: 64MB
- ROM: 64M Expandable to 2G
- Memory Card: 1GB SD/ MMC
- Sirt Star-III External GPS Receiver (20 Channel)
- Composite Video Output
- RGB Video Output
- Stereo Audio Output: RCA
- SD Slot for Data Storage and MAP Application
- All USA, Canada and Hawaii Maps
- Turn by Voice and Visual Direction Instructions
- Multi Destination Search Mode: Address (City, Streets and Number)
- POI, History and Favorite
- IR Remote Control
- Power Consuption:12V DC Input, Current 200 MA
- Dimension: 4.9 x 4.8 x 0.1 Inch
- Weight: 0.4 KG

PLST70 Touch Screen 7" Motorized TFT/LCD Monitor With AM/FM-MPX Radio

- 7" Inch 16:9 Wide Screen TFT/LCD Display
- Touch Screen (Touch Screen Easy Control Of Operations)
- NTSC & PAL Compatible
- Picture Control: Brightness/Contrast/Chroma/Hue
- Electronic Screen Angle/Position Memory
- SD/USB Function
- Repeat/Program/Random/Intro Play
- AM/FM Stereo Radio System
- Electronic Anti-Shock
- Auto Memory Store/Preset/Scan
- Parking Video Output
- 30 Preset Stations
- 4 Channel RCA Preamp Output/Subwoofer Output
- Card Size Full Function Remote Control
- Total Power Output: 4X80 Watts

PL2DN4D Double Din 4.2" Detachable Face In-Dash DVD/Cassette Player Monitor w/AM/FM/TV Tuner & USB/SD Card Reader

- Double Din 4.2" 16:9/4:3 TFT-LCD Monitor Displays
- Fold-Down Detachable Panel
- DVD/MP3/VCD/CD/CD-RW Compatible
- DVD & Cassette Player
- AM/FM & TV Tuner
- Auxilliary Line Input
- Auto Memory Store/Preset Scan
- 30 Preset Stations (18FM/12AM)
- Auto Memory Store
- Preset EQ Settings
- DVD Changer Controller
- Fully Motorized Automatic Slide/Close Mechanism
- Adjustable Screen Angle Position
- USB Jack / SD Card Reader
- On Screen Display
- Multi System (NTSC/PAL Selectable)
- 4 Channel RCA Pre-Amp Output/Subwoofer Output
- Electronic Volume/Balance/Bass/Treble/Fader Control
- Max Output: 4x50 Watts
- Rear Monitor Video Output
- Parking Video Input
- Full Function Wireless Remote Control

PLD51MUBT 5" TFT Touch Screen DVD/VCD/CD/MP3/CD-R/USB/ AM/ FM/Bluetooth and Screen Dial Pad

- DVD/VCD/Mpeg4/MP3/CD/CD-R/CD-RW Compatible
- Motorized Slide Down Detachable Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- Auto Store/Preset Scan
- Am/Fm - Mpx 2 Band Radio
- 30 Station Memory(18fm/12am)
- Built In 5 Inch(16:9) TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440x234 Pixels
- Brightness: 400 nits
- On Screen Title, Time, Chapter, Subtitle & Angle
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- ESP Function
- Lo/Dx & St/Mo Selector
- Repeat/Intro/Random
- Clock Function, Mute Control
- RCA Line Out
- Preset EQ, Subwoofer Output
- Selectable View Angle
- A/V Input & A/V Output
- Direct Connection Of Alternate Audio/Video Source Through Aux Line
- Input Jack(Mp3/Dvd/Cd)
- Remote Control
- Rear Camera Output, Parking Video Input
- RDs - Eon, USB Connector
- 11 Kinds Of Background Color
- Bluetooth Fuction
- Auto Muting Feature, & Hands Free Talking Capabilities.
- 320 Watts (4 x 80w)
- Last Position Memory
- USA/Europe Frequency Switch
- Dimensions: 7.24"(W) x 2.13" (H) x 6.69"(D)

PLD5MU 5" TFT DVD/ VCD/ CD/ MP3/CD-R/ SB/ AM/FM/ RDS Receiver

- DVD/VCD/Mpeg4/MP3/CD/CD-R/CD-RW Compatible
- Motorized Slide Down Detachable Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- PLL Synthesizer Tuner
- Auto Store/Preset Scan
- Am/Fm - Mpx 2 Band Radio
- 30 Station Memory(18fm/12am)
- Resolution: 1440x234 Pixels
- On Screen Display Title/Time/Chapter/Subtitle & Angle
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- Anti Shock Mechanism,ESP Function
- Lo/Dx & St/Mo Selector, RCA Line Out
- Clock Function, Mute Control
- Subwoofer Output
- Selectable View Angle
- A/V Input & A/V Output
- Direct Connection Of Alternate Audio/Video Source Through Aux Line
- Input Jack(Mp3/Dvd/Cd)
- Remote Control
- Rear Camera Output
- Parking Video Input
- USB Connector
- 320 Watts (4 x 80w)
- Last Position Memory
- USA/Europe Frequency Switch
- Dimensions: 7.24"(W) x 2.13" (H) x 6.69"(D)

PLD44MUBT 4.3" TFT Touch Screen DVD/VCD/CD/MP3/CD-R/USB/ AM/FM/Bluetooth and Screen Dial Pad

- DVD/VCD/Mpeg4/MP3/CD/CD-R/CD-RW Compatible
- Motorized Slide Down Detachable Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- Auto Store/Preset Scan
- Am/Fm - Mpx 2 Band Radio
- 30 Station Memory(18fm/12am)
- Built In 5 Inch(16:9) TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440x234 Pixels
- Brightness: 400 nits
- On Screen Title, Time, Chapter, Subtitle & Angle
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- Anti Shock Mechanism
- ESP Function
- Lo/Dx & St/Mo Selector
- Repeat/Intro/Random
- Clock Function, Mute Control
- RCA Line Out, Preset EQ
- Subwoofer Output
- Selectable View Angle
- A/V Input & A/V Output
- Direct Connection Of Alternate Audio/Video Source Through Aux Line
- Input Jack(Mp3/Dvd/Cd)
- Remote Control
- Rear Camera Output
- Parking Video Input
- RDs - Eon
- USB Connector
- 11 Kinds Of Background Color
- Bluetooth Fuction
- Auto Muting Feature, & Hands Free Talking Capabilities.
- 320 Watts (4 x 80w)
- Last Position Memory
- USA/Europe Frequency Switch
- Dimensions: 7.24"(W) x 2.13" (H) x 6.69"(D)

PLD43MU 4.3" Touch Screen TFT Monitor w/DVD/VCD/MP3/CD Player & AM/FM & USB Port

- DVD/ VCD/ MP3/ CD/ CD-R/ CD-RW Compatible
- Slide Down Detachable Front Panel
- PLL Synthesizer Tuner
- Direct Connection of Alternate Audio Source Through Aux Line Input Jack (MP3/ DVD/ CD)
- 30 Station Preset Memory
- On Screen Title/Time/ Chapter/Subtitle & Angle
- Treble/ Bass/ Balance/ Fader/ Encoder Volume
- AM/ FM-MPX 2 Band Radio
- 4.3" Digital TFT Monitor
- Touch Screen Capability
- 4 x 80 Watts w/ Fan
- Subwoofer Out
- Remote Control
- USB/ MPEG4
- iPod Ready/ Input Wire
- Rear Camera Output
- Parking Video Input

PLD42MU 4.3" TFT Monitor DVD/VCD/CD/MP3/CD-R/ USB/AM/FM/Receiver

- DVD/ VCD/ MP3/ CD/ CD-R/ CD-RW Compatible
- Slide Down Detachable Front Panel
- PLL Synthesizer Tuner
- Direct Connection of Alternate Audio Source Through Aux Line Input Jack (MP3/ DVD/ CD)
- 30 Station Preset Memory
- On Screen Display Title/ Time/ Chapter/ Subtitle & Angle
- Treble/ Bass/ Balance/ Fader/ Encoder Volume
- AM/ FM-MPX 2 Band Radio
- 4.3" Digital TFT Monitor
- 4 x 80 Watts w/ Fan
- Subwoofer Out
- Remote Control
- USB/ MPEG4
- iPod Ready/ Input Wire
- Rear Camera Output
- Parking Video Input

PLD38MU 3.8" TFT Monitor w/DVD/VCD/CD/MP4/MP3 Player & AM/FM Tuner & USB/SD Port

- DVD/VCD/MP4/MP3/CD/CD-R/CD-RW Compatible
- USB Host, SD-MMC Card Playable
- AM/FM-MPX 2 Band Radio
- PLL Synthesizer Tuner
- Auto Store/Preset Scan
- 30 Station Memory
- 3.8" TFT LCD Monitor
- OSD Title/Time/Chapter/Subtitle/Angle
- Treble/Bass/Balance/Fader/Volume Control
- Automatic Select PAL/NTSC/SECAM Fold-Down Detachable Front Panel
- Anti Shock Mechanism
- LO/DX&ST/MO Selector
- Repeat/Intro/Random
- Mute Function
- Preset EQ
- A/V Input & A/V Output
- Clock Function
- RCA Line Out
- 4x80 Watts Output Power
- Slim Type Remote Control
- Rear Camera Output
- Parking Video Input

PLD36MUBT 3.6" TFT Monitor w/DVD/VCD/MP3/CD Player & AM/FM /TV Tuner & USB Port/Bluetooth Connectivity

- DVD/ VCD/ MP3/ CD/ CD-R/ CD-RW Compatible
- Bluetooth Function
- Slide Down Detachable Front Panel
- PLL Synthesizer Tuner
- Direct Connection of Alternate Audio Source Through Aux Line
- Input Jack (MP3/ DVD/ CD)
- 30 Station Preset Memory
- On Screen Title/ Time/Chapter/Subtitle & Angle
- Treble/ Bass/ Balance/ Fader/ Encoder Volume
- AM/ FM-MPX 2 Band Radio
- 3.6" TFT Monitor
- 4 x 60 Watts w/ Fan
- Subwoofer
- Remote Control
- USB/ MPEG4/ TV Tuner
- iPod Ready/ Input Wire
- Rear Camera Output
- Parking Video Input

PLD57MU AM/FM-MPX DVD/VCD/CD/MP3 Disc Player w/3.6" LCD Screen & USB Port

- DVD/VCD/MP3/MP4/CD/CD-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio
- PLL Synthesizer Tuner
- Direct Connection of Alternate Audio Source Through Aux Line Input Jack (MP3/ DVD/ CD)
- Auto Store/Preset Scan
- 30 Station Memory
- Built-in 3.6" TFT-LCD Color Monitor
- OSD Title/Time/Chapter/Subtitle/Angle
- Treble/Bass/Balance/Fader/Volume Control
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- Motorized Slide Down/Detachable Front Panel
- Anti Shock Mechanism
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Sub Woofer Line Out
- A/V Input & A/V Output
- Rear Camera/Parking Video In/Out
- Remote Control
- USB Input Jack
- Power Output 4X80 Watts
- USA/Euro Frequency Switch

PLDBT30U 3" TFT Touch Screen DVD/VCD/CD/MP3/CD-R/USB/AM/FM/ BlueTooth and Screen Dial Pad

- DVD/VCD/MPEG4/CD/CD-R/CDRW Compatible
- Treble/Bass/Balance/Fader/Encoder/Volume
- Auto Store / Preset Scan
- AM/FM 2 Band Radio
- 30 Station Memory (18FM / 12AM)
- Built-In 3" (16:9) TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440 x 234 Pixels
- Brightness: 400 NITS
- PAL / NTSC Color
- On Screen Display Title/Time/Chapter/Subtitle & Angle
- Anti-Shock Mechanism
- ESP Function
- LO/DX & ST / MO Selector
- Repeat/ Intro/ Random
- Clock Function, Mute Control
- RCA Line Out
- Preset EQ
- Subwoofer Output
- A/V Input & A/V Output
- Remote Control, USB Connector,
- Rear Camera Output, Parking Video Input
- Bluetooth
- Auto Muting Feature, & Hands Free Talking Capabilities.
- 320 Watts (4 x 80 W)
- Last Position Memory
- Dimensions: 2.47" (W) x.83" (H) x 2.75" (D)

PLD3MU 3" TFT Touch Screen DVD/VCD/CD/MP3/CD-R/USB/AM/FM

- DVD/VCD/MPEG4/CD/CD-R/CDRW Compatible
- Treble/Bass/Balance/Fader/Encoder/Volume
- PLL Synthesizer Tuner
- Auto Store / Preset Scan
- AM/FM 2 Band Radio
- 30 Station Memory (18FM / 12AM)
- Built-In 3 Inch (16:9) TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440 x 234 Pixels
- Brightness: 400 NITS
- PAL / NTSC Color
- On Screen Title/Time/Chapter/Subtitle & Angle
- Anti-Shock Mechanism
- LO/DX & ST / MO Selector
- Repeat/ Intro/ Random
- Clock Function/ Mute Control
- RCA Line Out/ Preset EQ
- Subwoofer Output
- A/V Input & A/V Output
- Remote Control
- Rear Camera Output/ Parking Video Input
- USB Connector
- 320 Watts (4 x 80 W)
- Last Position Memory
- Dimensions: 2.47" (W) x.83" (H) x 2.75" (D)

PLD52MU 2.5" TFT Monitor DVD/VCD/MP3/CD-R/CD-RW/ USB/AM/FM/ Receiver

- DVD/VCD/MPEG4/MP3/CD/CD-R/CD-RW Compatible
- Auto Store / Preset Scan
- 30 Station Memory (18FM/12AM)
- AM/FM-MPX 2 Band Radio
- Built In 2.5" TFT Color Monitor
- On Screen Display Title, Time, Chapter, Subtitle & Angle
- Treble/Bass/Balance/Fader/Volume Controls
- Motorized Slide Down Front Panel
- Selectable View Angle
- Anti-Shock Mechanism
- PAL/NTSC Color System
- LO/DX & ST/MO Selectors
- Repeat/Intro/Random
- Clock Function/Mute Control
- Subwoofer Output
- A/V Input & A/V Output
- Remote Control/ RCA Line Out
- Rear Camera Output/Parking Video Input
- USB Conenctor
- USA/Europe Frequency Switch
- 200 Watts (4 x 50W)
- Dimensions: 7.24" (W) x 2.13" (H) x 6.69" (D)

PLTV74R Single DIN Motorized 7" TFT Monitor Tv-Tuner

- 7" In-Dash LCD Video Monitor
- In Dash Single Din Size
- Built-In Clock
- OSD On Screen Display
- Remote Control
- 2 Video RCA Inputs
- Built in Tv Turner
- Screen PAL/ NTSC/ AUTO
- Resolution: 1440 x 234
- Power Supply: DC 11V-14V
- Front Headphone Jack

PLVIN72 7" In-Dash LCD Video Monitor

- 7" In-Dash LCD Video Monitor
- Built-In Clock
- OSD On Screen Display
- Remote Control
- Resolution: 1440 x 234
- Power Supply: DC 11V-14V
- Front Headphone Jack

PLD175TBT In-Dash Detachable Face DVD/CD/MP3 w/AM-FM/TV Tuner & USB/SD Input and Bluetooth

- DVD/VCD/MP4/MP3/CD/CR-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio
- 24 Station Memories
- LO/DX Selection
- PAL/NTSC Color System
- Flip Down Detachable Front Panel
- Color LCD Display
- On Screen Display Title/Time/Chapter
- Subtitle & Angle Function
- Repeat/Intro/Random Function
- ST/MO Selection
- Mute Function/Clock Function
- Volume/Bass/Treble/Balance/Fader Control
- A/V Output & A/V Input
- Sub-woofer Function
- RCA Out/USB/SD Slot
- Bluetooth/Built-in TV Tuner /
- Remote Control
- 4x60W High Power Output
- Aux Input for Alternate Audio Source (MP3/DVD)

PLD177UBT In-Dash Detachable Face DVD/CD/MP3 w/AM-FM Radio & USB/SD Input and Bluetooth Capability

- DVD/VCD/MP4/MP3/CD/CR-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio
- PLL Synthesizer Tuner
- 24 Station Memories
- LO/DX Selection
- PAL/NTSC Color System
- Flip Down Detachable Front Panel
- Anti-Shock Mechanism
- Color LCD Display
- On Screen Display Title/Time/Chapter
- Subtitle & Angle Function
- Repeat/Intro/Random Function
- ST/MO Selection/ Mute Function
- Clock Function
- Volume/Bass/Treble/Balance/Fader Control
- A/V Output & A/V Input
- Sub-woofer Function
- RCA Out Socket
- USB/SD Slot
- Bluetooth Function
- Auto Power On
- Remote Control
- 4 x 60 W High Power Output
- Aux Input for Alternate Audio Source (MP3/DVD)

Bluetooth®

PLD179U In-Dash Detachable Face DVD/CD/MP3 w/AM-FM Radio & USB/SD Input

- DVD/VCD/MP4/MP3/CD/CR-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio
- 24 Station Memories
- LO/DX Selection
- PAL/NTSC Color System
- Flip Down Detachable Front Panel
- Anti-Shock Mechanism
- On Screen Title/Time/Chapter/Subtitle & Angle Func.
- Repeat/Intro/Random Function
- ST/MO Selection
- Mute Function/Clock Function
- Volume/Bass/Treble/Balance/Fader Control
- A/V Output & A/V Input
- Subwoofer Output
- RCA Out Socket
- USB/SD Slot
- Auto Power On
- Remote Control
- 4x60W High Power Output
- Aux Input for Alternate Audio Source (MP3/DVD)

PLD169U In-Dash Mobile DVD/CD/MP3 Player w/AM/FM Radio and Detachable Face & USB Port

- Fold down detachable Panel
- DVD/CD/CD-R/CD-RW/MP3/WMA Compatible
- Advanced ESP technique
- AM/FM Stereo radio system
- 30 Preset Stations
- Repeat/Program/Random/Intro Play
- Auto Memory Store/Preset Scan
- Multi Color LCD Display
- 60W X 4 High Power Output
- Front Aux-Input
- USB Port
- 4 Channel RCA Output
- 3 Preset EQ mode
- Card Size Full Function Remote Control

PLD128 In-Dash DVD/ CD/ MP3 w/ AM-FM Radio & Detachable Face

- Compatible w DVD/VCD/CD/MP3/CD-R/CD-RW Disc
- Full-Function Remote Control
- Auto Resume Adjust Parameter and Position
- Auto PAL and NTSC, video application and Strong
- Flip down Detachable Panel
- Max Output Power: 4 x 45W
- EQ3: Rock/ Pop/ Class/ Flat
- RCA Line Out
- Am/ FM Stereo Receiver
- 30 Preset Stations 18: FM 12: AM
- Auto Memory Store/ Preset Scan
- OSD Menu Instruction

PLTVD149 In-Dash Mobile DVD/CD/MP3 Player & TV Tuner

- DVD/VCD/MP4/MP3/CD/CR-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio
- PLL Synthesizer Tuner
- 24 Station Memory (18FM/6AM)
- LO/DX Selection
- PAL/NTSC Color System
- Anti-Shock Mechanism
- Built-in TV Tuner
- On Screen Display Title/Time/Chapter
- Subtitle & Angle Function
- Preset EQ
- ST/MO Selection
- Mute Function
- Volume/Bass/Treble/Balance/Fader Control
- A/V Output & A/V Input
- Front Panel Aux Input
- Subwoofer Output
- RCA Out Socket
- Remote Control
- 4x60W High Power Output

PLTD163 In-Dash Detachable Face Mobile DVD/CD/MP3 Player w/AM/FM Radio and TV Tuner

- DVD/VCD/MP4/MP3/WMA/CD/CD-R/CD-RW Compatible
- AM/FM 2 Band Radio
- Metal Tuner
- LO/DX Selection
- PAL/NTSC Color System
- Full Detachable Front Panel
- Anti-Shock Mechanism
- Blue Color LCD
- OSD Title/Time/Chapter/Subtitle & Angle Function
- Audio Control(Volume/Bass/Treble/Balance/Fader)
- Preset EQ
- MO/ST Selection
- Mute Function
- Clock Function
- ESP Funciton
- SD Slot
- AV in Socket on Panel
- A/V Input & A/V Output
- RCA Out Socket
- Auto Power On
- Remote Control
- 4x50w High Power Output
- Built-in TV Tuner

PLD139 In-Dash/Under Dash Mobile DVD/CD/MP3 Player

- DVD/VCD/MPEG4/MP3/CD/CD-R/CD-RW Compatible
- Anti-Shock Mechanism
- LCD Display
- Repeat/ Intro/ Random Function
- Mute Function
- ESP Function
- Front A/V Input
- Auto Power On
- Remote Control
- Last Position Memory
- Dimensions: 7.00'' x 6.90'' x1.97''

NEW 2008

PLD131F In-Dash/Under Dash DVD/CD/MP3 with Built-in FM Modulator

- In-Dash or Under Seat Mounting
- DVD/VCD/CD/CD-R/CD-RW/MP3 Compatible
- In-Dash Mounting Kit and Brackets Included
- Operate on 12V DC
- Built-in FM Modulator
- NTSC/PAL Compatible
- Card Size Full Function Remote Control
- Coaxial Digital Output
- Dimensions: 7'' x 1.96'' x 5.9''

PLD135 In-Dash/Under Dash Mobile DVD/CD/MP3 Player

- In-Dash or Under Seat Mounting
- DVD/VCD/CD/CD-R/CD-RW/MP3 Compatible
- In-Dash Mounting Kit and Brackets Included
- Operate on 12V DC
- NTSC/PAL Compatible
- Wireless Remote Contol With Remote IR Eye
- Coaxial Digital Output
- Dimensions: 7'' x 1.96'' x 5.9''

PLTDF25 In-Dash/Under Dash DVD/CD/MP3 Player/TV-Tuner with Built-in FM Modulator

- PAL/NTSC Color System
- Anti-Shock Mechanism
- Floor/Under-Dash Mounting Brackets
- Repeat/Random Function
- Mute Control
- Dolby Digital Coaxial Out
- ESP Function
- Last Position Memory
- Auto Power On
- USB/SD Slot
- Remote Control
- A/V Input
- FM Modulator
- Built-in TV Tuner
- Dimensions: 6.34'' x 6.3'' x 1.93''

PLD136 In-Dash/Under Dash Mobile DVD/CD/MP3 Player

- In-Dash or Under Seat Mounting
- DVD/VCD/CD/CD-R/CD-RW/MP3 Compatible
- In-Dash Mounting Kit and Brackets Included
- Operate on 12V DC
- NTSC/PAL Compatible
- Wireless Remote Contol With Remote IR Eye
- Coaxial Digital Output
- Dimensions: 7'' x 1.96'' x 5.9''

PLDVCR500 Mobile DVD/MP3/VCR/ Combination Unit

- Hi-Fi Stereo System (VCR)
- Digital Auto Tracking (VCR)
- Back Lighting of Function Buttons
- External IR Remote Control w/Receiver
- Dew & Heat Sensors for Tape Protection (VCR)
- Auto Start Function
- DC Power Supply (2 Kind of DC 12V Inputs)
- DVD, VCD, CD, CD-R, CD-RW, MP3
- VHS Playback Function
- Integrated Remote (VCR,DVD)
- MP3 File Playback Function
- Various Video Type-Supported (NTSC and PAL)
- DVD Screensaver function
- Slow or Fast Forward/Reverse Playback
- Various TV Aspect Ratios (DVD)
- Repeat Playback (Title and Chapter for Optical Media)
- Screen Zoom Function (DVD, VCD)
- Parental Lock Function (DVD)
- Multi-Angle Function (DVD)
- Multi Subtitle Function (DVD)
- Multi Audio Function (DVD)
- Composite Video Out
- Dimensions: 10.43''W x 5.11''H x 10.82''D

Roof Mount Monitors

PLRTD175 17" Flip-down Monitor & DVD Player w/Wireless FM Modulator & TV Tuner

- Active Matrix Hi Res TFT-LCD Monitor
- 15.4" Wide Aspect Polarized Screen
- High Resolution : 1280 x 800
- Brightness : 450 Cd/Sq.M
- Contrast Ratio : 500:1
- Viewing Angle : 160° (Left/Right) 160°(Top/Down)
- Overhead Console With Twin Dome Lights w/LED
- Built-In OSD Digital FM Modualtor
- Built-In Speakers
- Full Function Wireless Remote Control
- On Screen Menu System
- Front Pushbuttons Controls
- Audio / Video Inputs
- Multi System: NTSC & PAL Auto Switching
- Slot-Loading DVD Player
- DVD/VCD/CD/CD-R/CDRW/MP3 Compatible
- 10 Bit DAC Video Encorder
- 500 Lines Horizontal Resolutions
- Prologic Decoder
- Frequency Response: 20 Hz To 20Khz
- Power Requirement: 12V DC
- Built-in Tv Tuner
- DIN Cable w/RCA Jacks For A/V Connections
- Dimensions : 18.9" W x 14.8" D x 2.25" H(closed), 14.25" H(open)

PLRTD155 15.4" Flip-down Monitor & DVD Player w/Wireless FM Modulator & TV Tuner

- 15.4" Wide Screen Hi Res TFT-LCD Monitor
- High Resolution : 1280 x 800
- Brightness : 450 Cd/Sq.M
- Contrast Ratio : 500 :1
- Viewing Angle : 140° (Left/Right) 120°(Top/Down)
- Overhead Console With Twin Dome Lights w/LED
- IR Transmitter Ready for Wireless Headphone
- Built-In OSD Digital FM Modualtor
- Built-In Speakers
- Full Function Wireless Remote
- On Screen Menu System
- Front Pushbuttons Controls
- Audio / Video Inputs
- Multi System: NTSC & PAL Auto Switching
- Slot-Loading DVD Player
- DVD/VCD/CD/CD-R/CDRW/MP3 Compatible
- 10 Bit DAC Video Encorder
- 500 Lines Horizontal Resolutions
- Prologic Decoder
- Frequency Response: 20 Hz To 20Khz
- Power Requirement: 12V DC
- Built-in TV Tuner
- DIN Cable w/RCA Jacks For A/V Connections
- Dimensions: 15.5" (W) x 14" (D) x 2.25" (H) 14.25" Closed

PLRD143F 13.3" Roof Mount TFT LCD Monitor With Built In DVD Player

- 13.3" Wide Screen Hi Re TFT-LCD Monitor
- Resolution: 1280 x 800
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console With Twin Dome Lights w/LED
- IR Transmitter Ready for Wireless Headphone
- Front Pushbottoms Controls
- Audio Video inputs
- Multi System: NTSC &PAL Auto Switching
- Slot-loading DVD Player
- DVD CD/CD/CD-R/CDRW/MP3 Compatible
- Build in Speaker
- Anti-Skip Mechanism
- Last Position Memory
- Full Function wireless remote control
- Dimensions: 16.06"x W 13" H x 2.7" D

NEW 2008

PLRD103F 10.4" TFT LCD Roof Mount Monitor With Built-In DVD

- 10.4" Active Matrix TFT LCD Monitor/DVD
- 4:3 High Resolution Display
- DVD Compatible Format : DVD/VCD/CD/MP3/CD-R/ CD-RW/DVD-R/DVD-RW/MP4-DIVS
- Wide Angle, Off-Axix Visibility
- Video System : NTSC/PAL
- Resolution : 800 x 600 Pixels
- On Screen Display
- Wireless Remote Control
- Picture Brightness, Contrast, Saturation, Color Adjusting
- With Built-in IR/FM Transmitter
- Power Supply : DC 12V
- Dimension : 11.69" x 11.81" x 2.16"

NEW 2008

PLVWR20T 20" High Resolution TFT-LCD Flip Down Monitor with TV Tuner

- 20" TFT LCD Xga Panel
- High Resolution: 2400(H) X 600(V)
- High Brightness: 500Cd/Sq.M
- Wide Viewing Angle 160 Horizontal and Vertical
- TV Tuner Module (NTSC/PAL/Secam) Video System
- On Screen Display Menu
- Remote Control Included
- Built-In IR Transmitter For IR Wireless Headphone
- Built-In Wireless FM Modulator
- Built-In Dome Lights
- Din Interface Cable with RCA Jacks for Audio and Video Connections
- 12-14.4 Volt DC Single Power with Noise Filter
- Circuit Power Cable With Acc Protector

Roof Mount Monitors

PLVWR1982 19" High Resolution Widescreen TFT Roof Mount Monitor

- 19" Roof Mount TFT LCD Monitor
- English OSD Menu
- 16:9 Widescreen Format
- High Resolution 1280 x 1024
- 2 AV Inputs
- Built-In IR Transmitter for Wireless IR Headphones
- Full Function Wireless Remote Control
- Dual Dome Light Universal Roof Mount Console
- Dimensions: 18.7"(W) x 15"(H) x 1.8"(D)

NEW 2008

PLVWR1782 17" High Resolution Widescreen TFT Roof Mount Monitor

- 17" TFT LCD Panel
- Super Slim Design
- On Screen Display Menu
- 16:9 Widescreen Aspect
- High Resolution 1280 x 1024
- 2 AV Inputs
- Built-In IR Transmitter for Wireless IR Headphones
- Full Function Remote Control
- Dual Dome Light
- Universal Roof Mount Console
- Dimensions: 19" x 14.8" x 1.8"

PLVW1692R 16" High Resolution Widescreen TFT Roof Mount LCD

- PAL & NTSC Multi-System
- TFT Active Matrix System
- High Resolution
- Two Video Inputs
- English OSD Menu
- Swivel Screen
- Full Function Wireless Remote Control
- Built-In IR Transmitter for Wireless IR Headphones
- Dimensions: 15.2" x 12.5" x 1.4"
- Power Input: DC12V

NEW 2008

PLVWR1542 15" High Resolution TFT Roof Mount Monitor

- 15" TFT LCD Flip Down Monitor
- Super Slim Design
- On Screen Display Menu
- Display Mode: 4:3
- High Resolution 1024 x 768
- 2 AV Inputs
- Built-In IR Transmitter for Wireless IR Headphones
- Full Function Remote Control
- Dual Dome Light
- Universal Roof Mount Console
- Dimensions: 15.2" x 13.5" x 1.4"

PLVWR1442 14.7" High Resolution Widescreen TFT Roof Mount Monitor

- 14.7" High Resolution Widescreen Flip Down Monitor
- English OSD Menu
- Swivel Screen
- High Resolution 1024 x 768
- 2 AV inputs
- Built in IR Transmitter for Use with IR Headphones
- Full Function Wireless Remote Control
- Dual Dome Light Universal Roof Mount Console
- Dimensions:14.2" x 11.8" x 1.3"

NEW 2008

PLVW1342R 13” High Resolution Widescreen TFT Roof Mount Monitor

- 13” Flip Down Video Monitor
- Overhead Console w/Flip Bracket
- TFT Active Matrix Display
- Wide Angle, Off Axis Visibility
- Resolution: 800x600
- Front Panel Controls
- Swivel Bracket Permits 45° L/R Rotation
- NTSC/PAL System
- Built-In IR Transmitter for Wireless IR Headphones
- Wireless Remote Control
- Power Supply: DC12V
- Dimension: 12.7” x 10.9” 1.14”

PLVW1044R 10.6” High Resolution Widescreen TFT Roof Mount Monitor

- 10.6” High Resolution Widescreen Flip Down Monitor
- PAL & NTSC Multi-System
- TFT Active Matrix System
- High Resolution
- Two Video Inputs
- English OSD Menu
- Swivel Screen
- For Use with IR Headphones
- Full Function Wireless Remote Control
- Built-In IR Transmitter for Wireless IR Headphones
- Dimensions: 13.5” x 11.5” 1.2”
- Power Input: DC12V

NEW for 2008

PLVWR950T 9.5” Roof Mount TFT LCD Color Monitor w/Built-in TV Tuner

- 9.5” Diagonal Screen Size
- Active Matrix TFT-LCD
- Display Aspect Ratio: 16:9
- Resolution: 800 x 600
- Swivel Monitor
- Built-in TV Tuner
- Remote Control
- English OSD Menu
- AV Inputs
- NTSC/PAL Auto System
- High Frequency IR Transmitter/Headphone
- Dome Lights
- Power Supply: DC12V
- Dimensions : 10.75”(W) x 9.25”(D) x 1.63”(H)

PLVWR920IR 9.2” High Resolution TFT Roof-Mount Monitor

- 9.2” High Resolution TFT Roof Mount Monitor
- NTSC/ PAL Auto Switch
- English OSD Menu
- Full Function Remote
- With Dome Lights
- Power Input : DC 12 V
- Swivel Monitor
- Built In IR Function
- Dimensions: 12.1” x 10.3” x 1.4”

PLVWR750T 7” Roof Mount TFT-LCD Monitor w/Built-In TV Tuner

- 7” TFT-LCD Monitor
- Display Mode: 16:9
- PAL/NTSC Color Systems
- DC12V Power Supply
- Power Consumption: 12 W
- 300CD/M Brightness
- Contrast Ratio: 300:1
- Built-In IR Transmitter
- VHF/UHF TV Tuner
- Remote Control

Head Rest Monitors

PLD7HB Pair of Adjustable Headrest w/Built-in 7" TFT Monitor & 1 Built-in DVD Player

- Headrest Package Includes Two 7" TFT Monitor
- & One Moniter Includes a Built-in DVD Player
- Screen Size: 7" TFT-LCD Monitor
- Built-in Slot Loading DVD Player
- DVD/VCD/MP3/JPG Compatible
- Ultra Slim Design/SD-MMC Card Reader
- Built-in Mini Speaker
- Aspect Ratio: 16:9 Wide Screen
- 1440x234 Resolution
- Contrast: Ratio: 300:1
- Brightness: 350cd/m3
- Viewing Angle: U/D160° L/R160°
- Response Time: & 25ms
- Video Input Systems: AV1,AV2,PAL/NTSC
- Auto Switching
- Full Function Remote Control
- English OSD Menu
- Built-In IR Transmitter for Wireless IR Headphones
- Dimension: 15" x 12.2" x 5.7'

NEW 2008

PL71PHB Pair of Adjustable Headrest w/Built-in 7" TFT Monitor

- Headrest Package Includes Two 7" TFT Monitor
- Screen Size: 7" TFT-LCD Monitor
- DVD/VCD/MP3/JPG Compatible
- Ultra Slim Design/SD-MMC Card Reader
- Aspect Ratio: 16:9 Wide Screen
- 1440x234 Resolution
- Contrast: Ratio: 300:1
- Brightness: 350cd/m3
- Viewing Angle: U/D160° L/R160°
- Response Time: & 25ms
- Video Input Systems: AV1,AV2,PAL/NTSC
- Auto Switching
- Full Function Remote Control
- English OSD Menu
- Built-In IR Transmitter for Wireless IR Headphones
- Dimensions: 14.6" x 11" x 5.7

NEW 2008

PL7DHRT (TAN)
PL7DHRG (Grey)
PL7DHRB (Black)

Adjustable Headrest w/Built-in 7" TFT Monitor & DVD Player

- Screen Size: 7" TFT-LCD Monitor
- Built-in Slot Loading DVD Player
- DVD/VCD/MP3/JPG Compatible
- Ultra Slim Design/SD-MMC Card Reader
- Built-in FM Transmitter
- Built-in Mini Speaker
- Aspect Ratio: 16:9 Wide Screen
- 1440x234 Resolution
- Contrast: Ratio: 300:1
- Brightness: 350cd/m3
- Viewing Angle: U/D160° L/R160°
- Response Time: & 25ms
- Video Input Systems: AV1,AV2,PAL/NTSC
- Auto Switching
- Full Function Remote Control
- English OSD Menu
- IR Function
- Dimensions: 15" x 12.2" x 5.7"

PL71HRTN (TAN)
PL71HRBK (Black)

Adjustable Headrest w/ Built-in 7" TFT Monitor

- Screen Size: 7" TFT-LCD Monitor
- Aspect Ratio: 16:9 Wide Screen
- 1440x234 Resolution
- Contrast: Ratio: 300:1
- Brightness: 350cd/m3
- Viewing Angle: U/D160° L/R160°
- Response Time: & 25ms
- Video Input Systems: AV1,AV2,PAL/NTSC
- Auto Switching
- Full Function Remote Control
- English OSD Menu
- Dimensions: 14.6" x 11" x 5.7"

PL56PHRG (Grey)
PL56PHRB (Black)

Headrest Pair with Built-in 5.6" TFT-LCD Monitors

- 5.6" Headrest Color TFT-LCD Monitor
- High Brightness
- Wide Viewing Angle
- Full Function Remote Control with OSD Menu
- Power Supply: DC 12 V
- Aspect Ration: 4:3
- Resolution: 320 x 240 RGB
- NTSC/ PAL Compatible
- Dimensions: 10.6" x 7.5" x 4. 8"

Head Rest Monitors

PLHR9TSW 9.2" White Headrest TFT-LCD Monitor w/VGA Input & Touch Screen Capabilily

- Screen Size 9.2"
- TFT-LCD Monitor
- Dual Video Input
- VGA Input
- Touch Screen Capability
- PAL/NTSC Auto Switching
- DC12V Power Supply
- OSD Menu
- Wireless Remote Control
- VGA Resolution: 800 x 600
- AV Resolution: 480 X 234
- Contrast/Color/Brightness Adjustable
- Viewing Angle: (L/R) 65˚ (U) 40˚ (D) 15˚
- Dimensions: 10" x 6.7" x 1.2"

PLHR9TSB 9.2" Black Headrest TFT-LCD Monitor w/VGA Input & Touch Screen Capabilily

- Screen Size 9.2"
- TFT-LCD Monitor
- Dual Video Input
- VGA Input
- Touch Screen Capability
- PAL/NTSC Auto Switching
- DC12V Power Supply
- OSD Menu
- Wireless Remote Control
- VGA Resolution: 800 x 600
- AV Resolution: 480 X 234
- Contrast/Color/Brightness Adjustable
- Viewing Angle: (L/R) 65˚ (U) 40˚ (D) 15˚
- Dimensions: 10" x 6.7" x 1.2"

PLH9SP 9.2" TFT-LCD Wide Screen Monitor w/Built-in Speakers

- 9.2" Wide Screen TFT-LCD Monitor
- Aspect Ratio: 16:9
- 800x400 Resolution
- TFT Active Matrix Display
- NTSC/PAL Auto Color System
- Front Headphone Jack
- Front Panel A/V Input
- Low Power Consumption
- Built-in Speakers
- On Screen Menu Display
- Audio/Video Input Control
- Wireless Remote Control
- Universal Mounting Stand
- Headrest Mounting Shroud
- Dimensions: 7.2" (W) x 4.84" (H) x 0.9" (D)

PLHR7T 7" TFT/LCD Monitor w/TV Tuner & Tilt Angle Adjustable Headrest Bracket

- 7" TFT-LCD Monitor with TV tuner.
- High Resolution 1440 x 234
- Brightness: 420 nits
- Contrast: 300
- Viewing Angle; 50/70/70/70
- 16:9 Aspect Ratio
- Two AV Inputs
- Built-in TV Antenna
- Built-in Synthesizer PLL TV tuner
- Full Function Remote control with On Screen Display
- Power Input : +12V DC

PLHR7SP 7" Widescreen LCD Mobile Video Monitor W/Built-In Speakers

- 7" Inch Wide Screen
- Resolution: 480 x 234
- Luminance: 380 CD/M2
- Contrast Ratio: 300:1
- NTSC & PAL Compatible
- OSD: Multi 7 Languages
- Rear RCA Video Input
- Front A/V Input Terminal
- Front Audio Output Mini Stereo Jack
- Volume/Brightness/Contrast/Color Adjust
- Power Input: DC 12V
- Remote control
- Built-In Speakers
- Universal Stand & Headrest & Sun visor Shroud

PLHR79 7" TFT Headrest Monitor

- 7" 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC / PAL System Compatible
- Wireless Remote Control
- AV Input
- Headrest Shroud and Universal Stand Mount
- On Screen Display
- Brightness, Contrast, Color
- DC 12 Volt Power
- Dimensions: 13" (W) x 9.7" (H) x 3.6" (D)

NEW 2008

PLHR78W 7" TFT Headrest Monitor (White)

- 7" 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC / PAL System Compatible
- Wireless Remote Control
- AV Input
- Headrest Shroud and Universal Stand Mount
- On Screen Display
- Brightness, Contrast, Color
- DC 12 Volt Power
- Dimensions: 13" (W) x 9.7" (H) x 3.6" (D)

NEW 2008

PLVHR75 7" TFT Wide Screen Headrest Monitor

- Pal & NTSC System
- Two Video Inputs
- Stand and Headrest Shrouds
- OSD English Menu
- Full Function Remote Control
- Resolution: 1440 x 234 Dots
- Back Light: Cold Cathode Filament Tube
- View Angle Range: (Left/Right)60 (top) 30 (down) 10
- Dimension: 7.9" x 5.5" x 1.1"
- Weight: 2.20 Lbs
- Power Supply: DC 12V

NEW 2008

PLHR61 6" Headrest TFT LCD Monitor

- High Resolution TFT Active Matrix Display
- On-Screen Menu System
- Resolution: 1152 x 234 Pixels
- Wide-Angle/Off-Axis Visivility
- Front Panel Controls
- Includes Pedestal Stand
- Audio/Video Input Controls
- Wireless Remote Control
- Dimension: 6.69" x 5.43" x 1.18"

NEW 2008

PLHR56R 5.6" Mobile Video TFT/LCD Monitor w/Headrest Frame & Stand

- System:PAL/NTSC Auto Change
- Color: TFT
- Pixel: 320 (H) x RGB X 240 (W) = 320400 Dots
- Video: Single Video Input
- Power: DC 12V
- Consumption: 6W
- Weight: 510G
- Dimensions: 7.08" x 5.51" x 1.57"

PLDVSL7T 7" TFT Left Side Sunvisor DVD (Tan)

- 7" TFT LCD Monitor
- 16:9 Wide Screen
- Built-In Speaker
- DVD/ VCD/ CD/ MP3
- Wireless Remote Control
- 2 Audio Inputs and Outputs
- 1 Video Input and Output
- High Brightness
- PAL/ NTSC
- Color: Tan
- Dimensions: 14.8"W x 5.82"H x 1"D

PLVSR7T 7" TFT Right Side Sunvisor Monitor (Tan)

- 7" TFT LCD Monitor
- 16:9 Wide Screen
- Built-In Speaker
- Wireless Remote Control
- 2 AV Inputs
- High Brightness
- PAL/ NTSC
- Color: Tan
- Dimensions: 15.15" W x 5.82" H x 0.90" D

Sunvisor Monitors

PLVSL7T 7" TFT Left Side Sunvisor Monitor (Tan)

- 7" TFT LCD Monitor
- 16:9 Wide Screen
- Built-In Speakers
- Wireless Remote Control
- 2 Audio Inputs & Outputs
- 1 Video Input & Output
- High Brightness
- PAL/ NTSC
- Tan Colored to Match Car's Interior
- Dimensions: 15.15" W x 5.82" H x 0.90" D

PLVSL7G 7" TFT Left Side Sunvisor Monitor (Grey)

- 7" TFT LCD Monitor
- 16:9 Wide Screen
- Built-In Speakers
- Wireless Remote Control
- 2 Audio Inputs & Outputs
- 1 Video Input and Output
- High Brightness
- PAL/ NTSC
- Grey Colored to Match Car Interior
- Dimensions: 15.15" W x 5.82" H x 0.90" D

PLVSMR7 7" TFT Left & Right Side Sun Visor Monitors w/Mirror & Remote Control

- 7" Sun Visor Monitors For Left And Right Side
- Power Supply:Dc 12V
- Video:Dual Video Input
- Wireless Remote Control, Osd Menu
- System:PAL/NTSC (Auto Switching)
- Hard Plastic Construction
- Can be wrapped to match Car Interior
- Dimensions:14.3X 5.6 X 0.91 Inch
- Resolution: 480 X Rgb X 234
- Brightness: 300Cd/M2

PLVS7TN Tan Hard Plastic 7" TFT Left And Right Side Sun Visor Monitors

- 7" Sun Visor Monitors For Left And Right Side
- Tan Color to Match Car Interior
- Hard Plastic Construction
- Double Video Input
- 2nd Input Works With Back-up Camera
- Video Pass-through For Other Monitors
- Wide View Angle
- 4:3 Aspect Ratio
- Available For VCD/DVD/GPS/Camera
- Dimensions: 15X 5.7X 0.9 Inch

PLVS72TGR Grey Hard Plastic 7" TFT Left And Right Side Sun Visor Widescreen Monitors

- 7" Sun Visor Monitors For Left And Right Side
- Grey Color to Match Car Interior
- Hard Plastic Construction
- Dual Video Input
- One Audio Input
- Built-in TV Tuner
- Dtsc-remote Control Supplied-on-screen Display
- Brightness: 350 Cd/M2
- Resolution: 1440(H) X 234(W)
- Dimensions: 14.6X 5.7X 1.0 Inch

PLVS72TBK Black Hard Plastic 7" TFT Left And Right Side Sun Visor Widescreen Monitors

- 7" Sun Visor Monitors For Left And Right Side
- Black Color to Match Car Interior
- Hard Plastic Construction
- Dual Video Input
- One Audio Input
- Built-in TV Tuner
- Dtsc-remote Control Supplied-on-screen Display
- Brightness: 350 CD/M2
- Resolution: 1440(H) X 234(W)
- Dimensions: 14.6" x 5.7" x 1.0"

PLM102 10.2" Rear View Mirror Monitor

- Adjustable Viewing sizes: 10.2"/7"/5.6"
- Dual Video Inputs
- PAL & NTSC Auto Switching Color Systems
- Power Supply: DC 12V
- OSD Menu
- Remote Control
- 32:9/16:9/4:3 Adjustable Viewing Ratio
- Full Mirror when Powered Off
- Wide Viewing Angle
- Blue Screen Function when no signal
- Anti Glare Mirror
- Dimensions: 11" x 4.3" x 1.2"

Rear Camera/ Mirror Monitor Systems

PLM4135BT 4.2" TFT LCD Rear Mirror Monitor w/ Bluetooth

- Left Side High Definition Bluetooth 4.2'' TFT LCD
- Caller ID w/ 13 Digits
- PAL/ NTSC Video System
- Composite Video Input Level: 1Vp-p 78 Ohm
- Brightness/ Color & Contrast Control
- Automatic Monitor Power On (AV-1)
- Screen Reverse Control Switch (AV-1)
- Rear View Remote Control
- Wireless Remote Control
- Field of View: 60˚
- Min Illumination: 2.0 LUX
- Dimension: 11.3'' x 2.9'' x 1.6''

PLCM6000 6" Rear View Mirror Monitor w/ Rear View Camera

- 6" TFT High Resolution
- Dual Video Input
- PAL/ NTSC System
- Wireless Remote Control
- Built In Speaker
- Rear View Camera Included
- CMOS Water Proof Camera NTSC System
- Dimension: 12.2" (W) x 3.85" (H) x 1.7" (D)

PLCM5800 5.8" TFT LCD Mirror Monitor w/ Camera

- 5.8" TFT LCD Mirror Monitor w/ Camera
- Resolution: 480 x 234
- Contrast Ratio: 350 C D/M2
- Viewing Angle: U/D 120°/ L/R 90°
- Power Comsumption: 6W
- Auto Switch PAL & NTSC
- One Video Connect VCD/DVD

NEW 2008

PLCM4235 Rear View Mirror Camera System w/ Dual Screen

- Left Side Definition 4.2'' TFT LCD
- Right Side High Definition 3.5'' TFT LCD
- PAL/NTSC Video System
- Composite Video Input Level: 1Vp-p 78 OHM
- Brightness, Color & Contrast Control
- Automatic Monitor Power On (AV1)
- Screen Reverse Control Switch (AV-1)
- Rear View Camera Priority
- Wireless Remote Control
- Field of View: 60 degree's
- Min Illumination: 2.0 Lux

PLCM22IR Water Proof Rear View Camera w/0 Lux Night Vision Capability

- Waterproof Housing
- Image Sensor: OV7910 Color CMOS
- Total Pixels: 628 x 582
- Resolution: 380 TV Lines
- Night Vision Low Lighting Capable
- 10 IR LED Lights
- Min. Illumination: 0 LUX
- Lens: 6mm
- Video Output: 1.0Vpp Composite Video at 75 Ohm
- Power Supply: DC 12V >200 mA

PLCM10 License Plate Mount Rear View Camera

- Output Standard: PAL/NTSC
- High Resolution: 380 TV Lines
- Image Sensor: VC0702 Color CMOS
- Lens: 3.6mm 92 Degrees
- Low Light Illumination: 1.5 Lux/ F1.2
- Video Output RCA 1.0V pp Composite Video @ 75 Ohm
- Power Supply: DC 12V, 150mA
- Temperature: 10-50 Degrees Celsius
- Unit Dimensions: 13'' (H) x 8'' (W) x 1.26'' (D)

NEW 2008

PLCM20 Rear View Camera

- Image Sensor: OV 1/3'' Color CMOS
- Total Pixels: 628 x 582
- Resolution: 420 TV Lines
- Min. Illumination: 2.0 LUX
- Lens: 6mm
- Video Output: 1.0Vpp Composite Video at 75 Ohm
- Power Supply: DC 12V > 200 mA
- Dimensions: 0.98'' x 2.12''

PLMD2 FM Modulator For Mobile DVD's

- Pyle View Audio Adaptor
- Antenna RF Input & Output Jacks
- Left & Right Stereo RCA Female Input Jacks
- Two Station Selectable Outputs: FM Band 88.9Mhz & 88.5Mhz
- Requires 12 Volt Input Power, Switchable On/Off
- Switch to Avoid Any Possible FM Interference with Other Stations

PLMD3 7 Channel FM Wired Stereo FM Modulator

- Pyle View Audio Adaptor
- Antenna RF Input & Output Jacks
- Left & Right Stereo RCA Female Input Jacks
- Requires 12 Volt Input Power, Switchable On/Off
- Two Station Selectable Outputs: FM Band 87.7Mhz & 88.9Mhz
- Switch to Avoid Any Possible FM Interference with Other Stations

PLMD56 7 Channel Wireless FM Stereo Transmitter w/Line Outputs

- Pyle View Audio Adaptor
- Antenna RF Input & Output Jacks
- 7 Frequency Settings On Selectable DIP Switches
- 87.7MHz/87.9MHz/88.1MHz/88.3MHz/ 88.5MHz/88.7MHz/88.9MHz
- Left & Right Stereo RCA Female Input Jacks
- Requires 12 Volt Input Power, Switchable On/Off
- Switch to Avoid Any Possible FM Interference with Other Stations

PLMD7 7 Channel FM Stereo Transmitter

- 7 Frequency Settings On Selectable DIP Switches 87.7MHz/87.9MHz/88.1MHz/88.3MHz/ 88.5MHz/88.7MHz/88.9MHz
- Audio Input Impedance 10kohm
- S/N Ratio: 65dB
- Stereo Separation: 40dB

PLMD8 Digital PLL Synthesized FM-Stereo FM Modulator

- Digital PLL Synthesized FM-Stereo FM Modulator
- Ground Isolator Built-In
- 7 Frequency Settings On Selectable DIP Switch
- Power Input; DV 12V
- 87.7MHz/87.9MHz/88.1MHz/88.3MHz 88.5MHz/88.7MHz/88.9MHz

PLMD9 Wired FM Modulator

- Pyle View Audio Adaptor
- 110 Channels Selectable Frequencies
- Frequency Range From 87.5 to 98.5 Mhz
- Extended Digital Display w/ Wireless Remote Control
- Signal Can Be Received Through Walls/ Ceiling/ Windows & Any Concrete Objects

Mobile Video Accessories

PLV2 1 Into 4 Video Signal Distribution Amplifier

- Multi Video Amplifier
- One Rca Video Gold Plated Input Jack
- Four Rca Video Gold Plated Output Jacks
- Individual Variable Video Level Controls
- Power On Indicator
- Easy Mounting
- Dc 12V Power Input

PLV7 1 Into 7 Video Signal Distribution Amplifier

- Multi Video Signal Amplifier
- Easy Mounting
- Video Output Gain Control
- 1 Video Input
- 7 Video Output
- Independently Adjustable Variable Level Controls

PLVM3 IR Wireless Video Sender

- Frequency: 2.4Ghz
- 4 Selectable Channels
- FM Modulation
- Input Level: Video - Vp-p (NTSC/PAL)
- Impedance: Video - 75 Ohms
- Impedance: Audio - 600 Ohms (NTSC) 10k (PAL)
- RCA to RCA Line Input Jacks
- RF Output Power: 10dBm
- Dipole Antenna with SMA Connector
- 12V DC Power Supply

PLVSC44 4 In/4 Out Digital Audio/Video Source Switcher

- Digital Audio/Video Switcher
- 4 Audio/Video RCA Inputs
- 4 Monitor RCA Outs
- 12V Standard Power
- Composite Video Input 1V 75 Ohm
- Audio Input: 1V 600 Ohm
- Video Output: Composite Video 1V 75 Ohm
- Audio Output: 1V 600 Ohm
- Power Supply: DC 12V, +/-10%, Max 150mA
- Allows up to 4 Users to watch 4 seperate sources
- Allows for easy switching between TV,DVD,Games

PLVWAN3 Highly Senstive-TV Antenna

- VHF UHF High-Gain Conductor
- Attachable Inside car
- High Sensitivity Type
- The Antenna Can Be Installed On Any Vehicle
- Equipped w/High Gain Conductor to Work Effectively on UHF Zone
- Window/Interior Mount

PLVWAN6 Powered Diversity TV Antenna

- Powered Diversity Antenna
- Power: DC 14.4V
- Aux Type: Minus
- Max Power Amp: 50mA
- Output Terminal: 3.5 Mini Plug x 4
- Length on The Antenna Cable: 16.54”
- Weight: 260g (Including Cable)

PLVWAN7 Thin Film Diversity TV Antenna

- Diversity Antenna
- Mounts to Fixed Rear Windows or Side Windows
- Thin Film with Embedded Conductors
- Attaches easily to Glass Surfaces
- Max Power Amp: 50mA
- Output Terminal: 3.5 Mini Plug x 4
- 20dB Booster Gain
- 12’ 75 Ohm Cable
- 2 Seperate Antenna leads feed Diversity Signals

PLVWGM3 Wireless Mobile Video Gaming System

- Self Contained Mobile Video Gaming Unit
- Hand held controller wirelessly transmits to Monitor
- IR Receiver allows for discrete installations
- 10 Direction Controller/Joystick
- Multi Button Fire
- 50 Diverse Games Built-into the Controller
- 12V DC Power CompatibleDownload the Full Game List here

PLVWH5 Wireless Infrared Stereo Headphones

- Single Wireless Infrared Stereo Headphones
- Carrier Frequency: Right Channel 2.8MHz, Left Channel 2.3 MHz
- Light Weight Headset for wearing Comfort
- Auto Mounting Design on Receiving Headphone
- Operates Up To 48 Hours On (2) AAA Batteries

PLVWH6 One Pair Wireless Infrared Stereo Headphones w/Transmitter

- Two Wireless Infrared Stereo Headphones
- Transmitter Included
- Carrier Frequency: Right Channel 2.8MHz, Left Channel 2.3 MHz
- Light Weight Headset for wearing Comfort
- Auto Mounting Design on Receiving Headphone
- Operates Up To 48 Hours On (2) AAA Batteries

PLVWCRK5 1/2” DIN Center Channel Speaker and Amplifier

- High Power 50W Maximum Power Amplifier
- MountingBrackets And Hardware Included
- The Compact 1/2 Din Design
- Continuous Power Output: 25W
- Peak Power Output: 50W
- Frequency Response: 200 Hz To 28K Hz.
- Power Supple Voltage: 10.8V To 15.6V
- Current Consumption: 3A
- Dimensions: 1.75” (H) X 3.5”(W) X 5.75” (L)
- Weight: 1LbSpeaker Box:
- Peak Power Input: 50W
- Continuous Power Input: 25W
- Dimensions: 1.125” (H) X 6.75”(W) X 6.5” (L)
- Weight: 0.55Lb

Tuner System/ Universal Monitor Stands

PLTK120 UHF/VHF TV Tuner System

- Signal System: NTSC
- Dual Stereo Audio Inputs & Outputs
- Video Inputs & Outputs
- FM Modulator: FM 88.1 to 91.9
- TV Channels 2 to 125

PLTND Universal Mounting Stand

- For Use With Any Monitor and With 1/4 Slide Bracket

PLVBR Universal Headrest Mounting Kit

- For Use With Any Monitor and With 1/4 Slide Bracket

PLVHR Universal Headrest Dual Mounting Kit

- For Use With Vehicles With Bucket Seats To Mount Two Screens
- One Between The Two Seats, The Second Behind The Passenger Headrest
- For Use With Any Monitor and With 1/4 Slide Bracket

PLVSR Universal Sun Visor Mounting Kit

- Universal Sun Visor Bracket
- Bracket For Use With Any Monitor With 1/4 Slide Bracket
- For Use With Any Sun Visor

PLGN19 19” Gooseneck Mount for Monitor

- 19” Adjustable Mount For Use With Any Monitor and With 1/4 Slide Bracket

PLGN24 24” Gooseneck Mount for Monitor

- 24” Adjustable Mount For Use With Any Monitor and With 1/4 Slide Bracket

PLPSC8 Parking Sensor System With 2 Sensors & VFD Display

- 2 Rear Sensors
- High Definition VFD Dynamic Color Display
- Digital Distance Indicator
- Left & Right 4 Color 4 Stage Led Indicator
- 4 Stage Beeper Alarming Sound
- 5 Stage Voice Report Sound
- Optional Mute Function
- 24 Hour Time Display
- Temperature Display

PLPSE3 Parking Sensor System With 2 Sensors & Led Display

- 2 Rear Sensors
- Digital Distance Indicator
- 4 Color 7 Stage Led Indicator
- 4 Stage Beeper Alarming Sound
- Display Distance: 2.0m ~ 0.3m
- Dc 12v Application

PLPSE4 Parking Sensor System With 4 Sensors & Led Display

- 4 Rear Sensors
- Digital Distance Indicator
- 4 Color 7 Stage Led Indicator
- 4 Stage Beeper Alarming Sound
- Display Distance : 2.0m ~ 0.3m
- Dc 12v Application

PLPSE5 Parking Sensor System With 2 Sensors & Led Display

- 2 Rear Sensors
- Digital Distance Indicator
- Left & Right 4 Color 4 Stage Led Indicator
- 4 Stage Beeper Alarming Sound
- 5 Stage Voice Report Sound
- Optional Mute Function

PLPSE6 Reverse Parking Curb Sensor System

- DC 12V Application Only
- Color LED & Digital Display Rear Mirror
- Universal Clip On Rear Mirror
- 2 Ultrasonic Front Sensors
- 4 Ultrasonic Rear Sensors
- Range Display : 2.0M-0.3M
- Super Anti Error Distance

PLPSE8WL Reverse Parking Curb Sensor Wireless System

- 4 Rear Sensors
- Wireless LED Display, detecting distance within 15 meters
- LED Display easily mount on car dash board
- LED Display With Digital Distance Display
- LED Display With 2 Sides 4 Colors & 4 Stages Display
- 4 Stage Alarming Tone to alert the distance
- Easy Installation DC 12V

PLPSE9WL Reverse Parking Sensor Camera & Rearview Mirror Display Wireless System

- 4 Rear Sensors
- Wireless LED Display, detecting distance within 15 meters
- LED Mirror Display
- Mirror Clips on to Car's Existing Rear View Mirror
- LED Display With Digital Distance Display
- LED Display With 2 Sides 4 Colors & 4 Stages Display
- 4 Stage Alarming Tone to Alert the Distance
- Easy Installation DC 12V

PLPSMR9 Reverse Parking Sensor Camera & Rearview Mirror Monitor System

- DC 12V Application Only
- Color LED and Digital Display
- Camera/Sensor in Rear Bumper System
- 4 Ultrasonic Sensors
- Range Display: 2.0M-0.3M
- Camera displays in Rearview Mirror
- Separate Brain Box

PLPSV9 Dual Reverse Parking Curb Sensor System

- DC 12V Application Only
- Color LCD Display
- 24 Hour Display Clock
- Temperature Indicator
- 2 Rear Sensors
- Range Display: 2.0M-0.3M
- Super Anti-Error Distance

PWD203 6-Relay Vehicle Security System w/Code Encryption

- Two 4-button Encrypted Code Remote Transmitters
- w/Labeled Rubber Buttons
- 6 Built-in Relays for Starter Disable, Parking Lights,
- Dome Light Supervision, Trunk Release, and Door Locks
- Electronic Dual Stage Shock Sensor
- Dual Stage Optional Sensor Port
- LED Emergency Override Switch
- 125dB 6-tone Siren
- 3 Auxiliary Outputs (programmable for momentary, timed or latched operation)
- Passenger Unlock Output
- Horn Honk Output
- Panic Mode
- Valet Mode
- Real-time Sensor Adjustment Mode
- Smart Siren Duration
- Tamper Alert w/Zone Indication
- Automatic Bypass for Defective Zones
- Programmable Disarm w/ Trunk Release Feature
- Programmable Manual/Passive Arming
- Programmable Entry Delay w/Passive Arming
- Programmable Automatic Rearming
- Programmable Ignition Controlled Lock/Unlock
- Programmable Passive Door Locking
- Programmable Extended Pulse Lock Output
- Programmable Double Pulse Unlock Output
- Programmable Chirp Bypass
- Temporary Chirp Mute
- Multi-car Compatible
- Car Finder Feature
- Remote Valet Feature
- Remote Sensor Bypass
- Non-volatile Memory

PWD250 LCD 2-way Security System

- One 5-Button 2-way Remote Transmitter with LCD Display
- One 4-Button 1-way Remote Transmitter
- 2-way Transmitter Confirmation w/ LCD Display, Piezo
- Chime, and Vibrate Features
- Backlit LCD Display
- Extended Range Transceiver
- 3 Built-in Relays for Parking Lights, & Door Locks
- External Relay and Plug-in Harness for Starter Defeat
- Electronic Dual Stage Shock Sensor
- Dual Stage Optional Sensor Port
- LED Emergency Override Switch
- 125dB 6-tone Siren
- Dome Light Output
- Auxiliary Output
- Horn Honk Output
- Panic Mode
- Valet Mode
- Tamper Alert
- Automatic Sensor Bypass for Defective Zones

PWD201K 2-Button Vehicle Security System

- Two 3-button Transmitters w/Labeled Buttons
- Built-in Relay for Parking Lights
- LED Status Indicator
- Emergency Override Switch
- Door Lock Outputs
- Electronic Dual Stage Shock Sensor
- 120dB 6-tone Siren
- 2 Auxiliary Outputs
- Dome Light Output
- Panic Mode
- Anti-Carjack Mode
- Valet Mode
- Tamper Alert
- Automatic Bypass for Defective Zones
- Programmable Manual/Passive Arming
- Programmable Passive Door Locking
- Programmable Ignition Controlled Lock/Unlock
- Programmable Chirp Bypass
- Temporary Chirp Mute
- Non-volatile Memory

PWD301 Remote Start System w/Keyless Entry

- Two 4-button Transmitters w/Labeled Rubber buttons
- LED Valet Mode
- Extended Range Receiver
- Door Lock Outputs
- Auxiliary Output
- Built-In Flashing Parking Light Relay
- Built-In Ignition 1Relay
- Built-In Ignition 2 Relay
- Built-In Start Relay
- Built-In Accessory Relay
- Starter Anti-grind Output
- Factory Alarm Disarm Output
- Stop and Go Mode
- Automatic Cold Start Mode
- Keyless entry in Valet Mode
- Programmable Spark/Tach Sense
- Programmable Diesel Mode
- Programmable Extended Pulse Lock Output
- Programmable Double Pulse Unlock Output
- Programmable Engine Run Time

PWD303 Add on Remote Starter

- Engine Running Detection from Tach or Alternator
- Programmable Cranking Time
- 30Amp Relay Built In
- 12V Input with 30Amp Protection Fuse
- Ground Output to Bypass Factory Anti-Theft System

PWD511 2-Way Alarm System w/Five Button Transmitter and Antenna

- One 5 Button 2-Way Transmitter w/Electronic Lumi nescent Backlight Vibrator One 4 Button Transmitter
- Remote Keyless Entry
- Panic Mode
- LED Status Indicator
- Arm/Disarm In Silent Mode
- Frequency: 433MHz
- 125dB Six Tone Siren
- Passive / Immobilizer Output
- Electronic Shock Sensor w/Light Impact
- Ignition Controlled Door Lock/Unlock

PWD501 LCD 2-way Remote Start/Security System

- One 5-Button 2-way Remote Transmitter with LCD Display
- One 4-Button 1-way Remote Transmitter
- 2-way Transmitter Confirmation w/ LCD Display,Piezo Chime, and Vibrate Features
- Backlit LCD Display
- Extended Range Transceiver
- 7 Built-in Relays for Start, Ignition 1, Ignition 2,Accessory, Flashing Parking Lights, & Door Locks
- External Relay and Harness for Starter Defeat w/Anti-grind
- Built-in Electronic Dual Stage Shock Sensor
- Dual Stage Optional Sensor Port LED
- Emergency Override Switch
- 125dB 6-tone Siren
- Door Lock Outputs
- Ground When Running Output
- Dome Light Output
- Auxiliary Output
- Horn Honk Output
- Panic Mode
- Valet/Tamper Alert
- Automatic Bypass for Defective Zones
- Factory Alarm Disarm Output
- Stop and Go Mode
- Automatic Cold Start Mode
- Programmable Turbo Timer Feature
- Programmable Chirp Bypass
- Programmable Cold Start Timing
- Programmable Engine Run Time
- Programmable Tach Sense
- Programmable Diesel Mode
- Programmable Manual/Passive Arming
- Programmable Automatic Re-arming
- Programmable Ignition Controlled Lock/Unlock
- Programmable Passive Door Locking
- Programmable Extended Pulse Lock Output
- Programmable Double Pulse Unlock Output
- Remote Valet Feature
- Remote Sensor Bypass
- Non-volatile Memory

PWD206 Card Immobilizer

- Fully Automatic Immobilizer
- Universal Operation
- On Board Buzzer for Arming/Disarming Confirmation
- Status Memory
- 264 Code Combination
- Cut 2 or 3 Circuits

Bluetooth Devices

PBT30M Wireless BlueTooth Headset

- Ergonomic Design to Fit Your Face and for Long Hour Wearing Comfort
- Finger-Tip Control for Convenience
- Encrypted Link to Ensure Private and Secured Communication
- Up to 6 Hours Talk Time and 100 Hours Stand-by Time
- LED for Phone Line in Use and Battery Level Check Indication
- Easy Switching between Bluetooth Headset & Mobile Phone Handset
- Auto Power Off When Bluetooth Connection has Been Broken for 10 Minutes
- Auto Connecting to Last Connected Device, When It's Turned On Again & In Range
- Warning Signals When No GSM Network is Available

PBT55D BlueTooth Wireless Stereo Headphone

- Compatible with Stereo BlueTooth Mobile Phones
- 12 Hours Talk Time, 260 Hours Standby Time
- With Built-In Micro-phone
- With Foldable Headband & Comfortable Earcups
- Can Answer Phone Calls & Listen to Stereo Music
- Support Last Number Dial & Voice Dial
- Support HSP, HFP, A2DP & AVRCP
- Music Remote Control, Volume Up/Down/Forward/ Backward
- Range up to 32.80' Operating Range
- LED for Line-in-Use and Battery Level Indication
- AC Adaptor Included
- CE, FCC, BQB Approval
- RoHS Compliant
- Only 2.1 Oz
- Dimensions: 1.6'' x 1.6'' x .82''

PBT70R Universal Bluetooth Car Kit for Bluetooth Enabled Mobile Phones

- Big LCD To Display Caller ID And Car Kit Status
- Digital Volume Adjustment
- One Button Operation To Answer And End A Call
- Hands-Free Speaker Phone Operation
- Excellent Audio Quality
- Voice Dialing
- Call Waiting
- Auto Connection To Last Connected Bluetooth Mobile Phone
- Echo Cancellation & Noise Reduction Via DSP
- Full Duplex
- Connecting 2 Mobile Phones At The Same Time

PBT78XP Universal Deluxe Bluetooth Dialing Car Kit for Bluetooth Enabled Mobile Phones

- Hands-Free Speaker Phone Operation
- Caller ID Display
- Two-Way Recording And Playback,
- 60 Minutes (30 Records Max.)
- 255 Phone Book Entries
- Call List
- Dial List
- 7-Level Volume Up / Down Switch
- One Touch Answer/End Call Button
- Noise Reduction
- Echo Cancellation
- LCD Display With Backlight
- Dialing Keypad With Backlight
- Powered By Car Charger/Built - In Ni - MH Battery
- Flexible Windshield Stand With Vacuum Suction
- External Microphone (Included)
- Auto Connection To Bluetooth Mobile Phone
- Call Waiting
- Portable Conferencing Unit

PIFM5 iPod/ MP3 Up to 7 Channel FM Transmitter w /LCD Display

- High Quality Stereo Audio
- Universal 3.5mm Stereo Plug
- Cigarette Lighter Plug
- LCD Channel Display/ Indicates the Frequency in Use
- Up/Down Channel Selector
- 7 Selectable Frequencies: 87.7/ 87.9/ 88.1/ 88.3/ 88.5/ 88.7/ 88.9 MHz
- Compatible for iPods/ MP3/ DVD/ CD Players

PIFM7 iPod/ MP3 Up to 200 Channels FM Transmitter w/ LCD Display

- High Quality Stereo Audio
- Universal 3.5mm Stereo Plug
- Cigarette Lighter Plug
- LCD Channel Display: Indicates The frequency in Using
- Light up When Power On
- Covers up to 200 Channels
- Up/Down Selector up to 200 Channels
- Compatible for iPods/MP3/DVD/CD Players
- Adjust The Car Frequency to The Same One as Transmitter for Receiving Signals
- Power On/Off Button
- Light Weight & Portable
- USB Connector: 87.0-108.0 MHz

PIFMPK9 iPod Car Stereo FM Transmitter up to 200 Channels w/LCD Display

- High Quality Stereo Audio
- iPod Docking & Charging Station
- Compatible with All iPod Models
- Universal 3.5mm Stereo Plug for All MP3/ DVD/ CD Players
- Cigarette lighter plug
- LCD Channel Display
- Up/Down Channel Selector
- Power On Button
- Frequency Range: 88.1 MHz-107.9 MHz (Frequency Interval is 0.1 MHz)
- Frequency Stability: +10PPM (-10 C~ + 50deegrees C)
- Noise Limitation: >60 dB
- Frequency Deviation: <75 KHz
- Transmitting Range: >8m
- Audio Input Bandwidth: 100~15000 Hz

PIFMDK6 iPod Car Stereo FM Transmitter up to 200 Channels w/LCD Display & Flexible Goose Neck Stand

- High Quality Stereo Audio
- iPod Docking & Charging Station
- Goose Neck Stand
- Compatible with most iPod models
- Cigarette lighter plug
- LCD Channel Display
- Up/Down Channel Selector
- Power On Button
- Frequency Range: 88.1 MHz-107.9 MHz (Frequency Interval is 0.1 MHz)
- Frequency Stability: +10PPM (-10 C~ + 50deegrees C)
- Noise Limitation: >60 dB
- Frequency Deviation: <75 KHz
- Transmitting Range: >8m

PNVS1 Mini DC to AC Power Inverter

- 60 Watts Continuous Power
- 150 Watts Output Surge Power
- 90% Optimum Efficiency
- Generates 115V/60 Cycles
- Compatible with Any 12V DC Power Source
- Replaceable Spade Fuse
- For use in Cars, Trucks, RV's, Boats and Aircraft
- Perfect for use with Video Game systems

PNVS4 Mini DC to AC Power Inverter

- 150 Watts Continuous Power
- 270 Watts Output Surge Power
- 90% Optimum Efficiency
- Generates 115V/60 Cycles
- Compatible with Any 12V DC Power Source
- Replaceable Spade Fuse
- For use in Cars, Trucks, RV's, Boats and Aircraft
- Perfect for use with Video Game systems

Power Inverters

PINV1 150 Watt DC to AC Power Inverter

- 150 Watts Maximum Continuous AC Output Power
- 300 Watts Maximum AC Output Surge Power
- General Dual 115 Volts 60 Cycles as Power From Any 12 Volt
- DC Power Source
- Replaceable Spade Fuse
- Use In Car. Truck, RV or Boat
- 90% Optimum Efficiency
- Use For Video Games
- 12.8-20 Amp Input Current
- Less Than 0.3A No Load Current Draw
- Dimensions: 4.75"W x 2.08"H x 4.64"D
- Electronic Over Load Protection w/Automatic Shutdown
- Low Battery Voltage Warning Followed By Automatic Shutdown
- High Input Voltage Protection
- Input Reverse Polarity Protection

PINV2 300 Watt DC to AC Power Inverter

- 300 Watts Maximum Continuous AC Output Power
- 600 Watts Maximum AC Output Surge Power
- General Dual 115 Volts 60 Cycles as Power From Any 12 Volt
- DC Power Source
- Replaceable Spade Fuse
- Use In Car. Truck, RV or Boat
- 90% Optimum Efficiency
- Use For Video Games
- 25.6-40 Amp Input Current
- Less Than 0.5A No Load Current Draw
- Dimensions: 4.75"W x 2.08"H x 6.69"D
- Electronic Over Load Protection w/Automatic Shutdown
- Low Battery Voltage Warning Followed By Automatic Shutdown
- High Input Voltage Protection
- Input Reverse Polarity Protection

PINV3 400 Watt DC to AC Power Inverter

- 400 Watts Maximum Continuous AC Output Power
- 800 Watts Maximum AC Output Surge Power
- General Dual 115 Volts 60 Cycles as Power From Any 12 VoltDC Power Source
- Replaceable Spade Fuse
- Use In Car. Truck, RV or Boat
- 90% Optimum Efficiency
- Use For Video Games
- 53.0-60 Amp Input Current
- Less Than 0.7A No Load Current Draw
- Dimensions: 4.75"W x 2.08"H x 8.43"D
- Electronic Over Load Protection w/Automatic Shut down
- Low Battery Voltage Warning Followed By Automatic Shutdown
- High Input Voltage Protection
- Input Reverse Polarity Protection

PINV4 600 Watt DC to AC Power Inverter

- 600 Watts Maximum Continuous AC Output Power
- 1200 Watts Maximum AC Output Surge Power
- General Dual 115 Volts 60 Cycles as Power From Any 12 VoltDC Power Source
- Replaceable Spade Fuse
- Use In Car. Truck, RV or Boat
- 90% Optimum Efficiency
- Use For Video Games
- 50-55 Amp Input Current
- Less Than 0.7A No Load Current Draw
- Dimensions: 4.75"W x 2.08"H x 11.10"D
- Electronic Over Load Protection w/Automatic Shutdown
- Low Battery Voltage Warning Followed By Automatic Shutdown
- High Input Voltage Protection
- Input Reverse Polarity Protection

PINV5 800 Watt DC to AC Power Inverter

- 800 Watts Maximum Continuous AC Output Power
- 1600 Watts Maximum AC Output Surge Power
- General Dual 115 Volts 60 Cycles as Power From Any 12 VoltDC Power Source
- Replaceable Spade Fuse
- Use In Car. Truck, RV or Boat
- 90% Optimum Efficiency
- Use For Video Games
- 65-70 Amp Input Current
- Less Than 0.9A No Load Current Draw
- Dimensions: 4.75"W x 2.08"H x 12.67"D
- Electronic Over Load Protection w/Automatic Shutdown
- Low Battery Voltage Warning Followed By Automatic Shutdown
- High Input Voltage Protection
- Input Reverse Polarity Protection

PINV6 1000 Watt DC to AC Power Inverter

- 1000 Watts Maximum Continuous AC Output Power
- 2000 Watts Maximum AC Output Surge Power
- General Dual 115 Volts 60 Cycles as Power From Any 12 VoltDC Power Source
- Replaceable Spade Fuse
- Use In Car. Truck, RV or Boat
- 90% Optimum Efficiency
- Use For Video Games
- 80-85 Amp Input Current
- Less Than 0.9A No Load Current Draw
- Dimensions: 4.75"W x 2.08"H x 13.46"D
- Electronic Over Load Protection w/Automatic Shutdown
- Low Battery Voltage Warning Followed By Automatic Shutdown
- High Input Voltage Protection
- Input Reverse Polarity Protection

PNVU200 Ultra Compact DC to AC Power Inverter

- 80 Watts Continuous Power
- 160 Watts Output Surge Power
- 90% Optimum Efficiency
- Generates 115V/60 Cycles
- Compatible with Any 12V DC Power Source
- Replaceable Spade Fuse
- For use in Cars, Trucks, RV's, Boats and Aircraft
- Perfect for use with Video Game systems

PNVU400 Ultra Compact DC to AC Power Inverter

- 120 Watts Continuous Power
- 240 Watts Output Surge Power
- 90% Optimum Efficiency
- Generates 115V/60 Cycles
- Compatible with Any 12V DC Power Source
- Replaceable Spade Fuse
- For use in Cars, Trucks, RV's, Boats and Aircraft
- Perfect for use with Video Game systems
- Built-In Cooling Fan

PNVU500 Ultra Compact DC to AC Power Inverter

- 120 Watts Continuous Power
- 240 Watts Output Surge Power
- 90% Optimum Efficiency
- Generates 115V/60 Cycles
- Compatible with Any 12V DC Power Source
- Replaceable Spade Fuse
- For use in Cars, Trucks, RV's, Boats and Aircraft
- Perfect for use with Video Game systems

PSL32X 2.5 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Input: 115V AC, 60Hz, 50 Watts
- Output: 13.8V DC
- 2.5 AMP Constant/3 AMP Surge
- Powers Cell Phones, 12V DC CB Radios,Scanners,etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/ Auto Reset
- Short Circuit
- Fuse Protected
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 7.75"(L) x 5.67"(W) x 3.15"(H)

PSL42X 3 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Input: 115V AC, 60Hz, 50 Watts
- Output: 13.8V DC
- 3 AMP Constant/4 AMP Surge
- Powers Cell Phones, 12V DC CB Radios, Scanners,etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/ Auto Reset
- Short Circuit
- Fuse Protected
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 7.75"(L) x 5.67"(W) x 3.15"(H)

PSL72X 5 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Input:115V AC, 60Hz,70 Watts
- Output: 13.8V DC
- 5 AMP Constant/7 AMP Surge
- Powers Cellular Phones,12V DC CB Radios, Scanners, etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/Auto Reset
- Short Circuit & Thermal Protection
- Fuse Protected
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 7.75"(L) x 5.67"(W) x 3.15"(H)

PSL82X 6 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Input:115V AC, 60Hz,100 Watts
- Output: 13.8V DC
- 6 AMP Constant/8 AMP Surge
- Powers Cell Phones,12V DC CB Radios,Scanners,etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/Auto Reset
- Short Circuit & Thermal Protection
- Fuse Protected
- Heavy Duty Cabinet &Heatsink w/Anti-Skid Rubber Feet
- Dimensions: 7.75"(L) x 5.67"(W) x 3.15"(H)

PSL92X 5 AMP POWER SUPPLY w/CIGARETTE LIGHTER PLUG

- Perfect For Home, Shop And Hobbyist
- Input: 115V AC, 60Hz, 70 Watts
- Output: 13.8V DC
- 5 AMP Constant/7 AMP Surge
- Convenient Cigarette Lighter Plug Lets You Power ANYTHING That Will Run Off A 12V Car Cigarette Lighter.
- Powers Cellular Phones,12V DC CB Radios, Scanners,Etc.
- Screw Terminal Connectors
- Electronic Overload Protection W/ Auto Reset
- Short Circuit & Thermal Overload Protection
- Fuse Protected
- Heavy Duty Cabinet & Heatsink With Anti-Skid Rubber Feet
- Dimensions: 7.75"(L) X 5.67"(W) X 3.15"(H)

PSL122X 10 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Input: 115V AC, 60Hz, 250 Watts
- Output: 13.8V DC
- 10 AMP Constant/12 AMP Surge
- Powers Cellular Phones,12V DC CB Radios, Scanners, HAM Radios, Autosound Systems
- Screw Terminal Connectors
- Electronic Overload Protection w/ Auto Reset
- Short Circuit & Thermal Protection
- Fuse Protected
- LED Condition Indicators
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 8.15"(L) x 7.64"(W) x 4.53"(H)

PSL142X 12 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Input: 115V AC, 60Hz, 270 Watts
- Output: 13.8V DC
- 12 AMP Constant/14 AMP Surge
- Powers Cellular Phones,12V DC CB Radios, Scanners, HAM Radios, Autosound Systems
- Screw Terminal Connectors
- Electronic Overload Protection w/ Auto Reset
- Short Circuit & Thermal Protection
- Fuse Protected
- LED Condition Indicators
- 3 Prong Grounded AC Plug
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 8.15"(L) x 7.64"(W) x 4.53"(H)

PSL152X 10 AMP POWER SUPPLY w/CIGARETTE LIGHTER PLUG

- Perfect for Home, Shop and Hobbyist
- Input: 115V AC, 60Hz, 250 Watts
- Output: 13.8V DC
- 10 AMP Constant/12 AMP Surge
- Convenient Cigarette Lighter Plug lets you power ANYTHING that will run off a 12V car cigarette lighter.
- Powers Cellular Phones,12V DC CB Radios, Scanners, (HAM Radios, Autosound Systems, etc.)
- Screw Terminal Connectors
- Electronic Overload Protection w/ Auto Reset
- Short Circuit & Thermal Protection
- Fuse Protected
- LED Condition Indicators
- 3 Prong Grounded AC Plug
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 8.15"(L) x 7.64"(W) x 4.53"(H)

PSL212X 18 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Built-in Cooling Fan
- Current Meter
- Input: 115V AC, 60Hz, 450 Watts
- Output: 13.8V DC
- 18 AMP Constant/20 AMP Surge
- Powers Cellular Phones,12V DC CB Radios, Scanners, HAM Radios, Autosound Systems, etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/Auto Reset
- Short Circuit & Thermal Protection
- Crowbar Over-Voltage Protection
- Fuse Protected
- LED Condition Indicators
- 3 Prong Grounded AC Plug
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 11.38"(L) x 9.45"(W) x 4.65"(H)

PSL262X 22 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Built-in Cooling Fan
- Current and Voltage Meters
- Input: 115V AC, 60Hz, 500 Watts
- Output: 6~15V DC(Adjustable)
- 22 AMP Constant/25 AMP Surge
- Powers 6~15V DC Devices such as Cellular Phones, CB Radios, Scanners, HAM Radios, Auto sound Systems, etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/Auto Reset
- Short Circuit & Thermal Protection
- Crowbar Over Voltage Protection
- Fuse Protected
- LED Condition Indicators
- 3 Prong Grounded AC Plug
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 11.38''(L) x 9.45''(W) x 4.65''(H)

PSL362X 32 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Built-in Cooling Fan
- Current and Voltage Meters
- Input: 115V AC, 60Hz, 600 Watts
- Output: 12~15V DC(Adjustable)
- 32 AMP Constant/35 AMP Surge
- Powers 12V DC Devices such as Cellular Phones, CB Radios, Scanners, HAM Radios, Autosound Systems,etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/Auto Reset
- Short Circuit & Thermal Protection
- Crowbar Over Voltage Protection
- Fuse Protected
- LED Protection Indicators
- 3 Prong Grounded AC Plug
- Heavy Duty Cabinet & Heatsink with Non-Skid Rubber Feet
- Dimensions: 13.62''(L) x 9.45''(W) x 4.65''(H)

PSL462X 35 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Built-in Cooling Fan w/On-Off Switch
- Current and Voltage Meters
- Input: 115V AC, 60Hz, 750 Watts
- Output: 13.8V DC
- 35 AMP Constant/40 AMP Surge
- Powers 12V DC Devices such as Cellular Phones, CB Radios, Scanners, HAM Radios, Autosound Systems,etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/Auto Reset
- Short Circuit & Thermal Protection
- Crowbar Over Voltage Protection
- Fuse Protected
- LED Condition Indicators
- 3 Prong Grounded AC Plug
- Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
- Dimensions: 12.5''(L) x 13.20''(W) x 5''(H)

PSL522X 40 AMP POWER SUPPLY

- Perfect for Home, Shop and Hobbyist
- Rack Mountable Chassis
- Built-in Cooling Fan
- Current and Voltage Meters
- Input: 115V AC, 60Hz, 800 Watts
- Output: 12~15V DC(Adjustable)
- 40 AMP Constant/50 AMP Surge
- Powers 12V DC Devices such as Cellular Phones, CB Radios, Scanners, HAM Radios, Autosound Systems,etc.
- Screw Terminal Connectors
- Electronic Overload Protection w/Auto Reset
- Short Circuit & Thermal Protection
- Crowbar Over Voltage Protection
- Fuse Protected
- LED Condition Indicators
- 3 Prong Grounded AC Plug
- Heavy Duty Rack Mountable Cabinet & Heatsink
- Dimensions: 13''(L) x 19''(W) x 5''(H)

PSL642X FULLY REGULATED, LOW RIPPLE, 60 AMP RACK MOUNTABLE POWER SUPPLY

- Rack Mountable Chassis
- Built-in Cooling Fan
- Input: 115V AC, 60Hz
- Output: 13.8V DC
- 60 AMP Constant/65 AMP Surge
- Multiple Screw Terminal Connectors
- Electronic Overload Protection w/Auto Reset
- Short Circuit & Thermal Protection
- Crowbar Over Voltage Protection
- Resettable Circuit Breaker
- 3 Prong Grounded AC Plug
- Heavy Duty Cabinet & Heatsink
- 4 Roller Casters
- Dimensions: 13.31''(L) x 19''(W) x 6.93''(H)

CD Player Head Units

PLCD70MUBT AM/FM Bluetooth USB/SD/MMC Card Slot CD-R/ CD-RW for MP3 Playback Stereo

Bluetooth®

- AM/FM-MPX Tuner Compact Disc/ MP3 Player
- Motorized Slide Down Detachable Face
- White LED Multi Color LCD Display
- DSP Control: POP, Rock, Classic, Flat
- Auto Best Station Memory/ Preset Scan
- CD-R/ CD-RW for MP3 Playback
- ID3 TAG Information Display of MP3 File Name
- Electronic Anti-Shock for CD/ MP3
- Pause/ Intro Scan/ Repeat/ Random
- Track Skip-Forward Reverse
- Minute, second & track Display
- Preset EQ & Power Meter
- Mode Buttom:Radio, CD/MP3, USB, SD/ MMC
- 30 Station Memory: 18FM/12AM
- Audio Control: Volume/Balance /Bass/Treble/ Fader
- 1 Bit D/A Converter. 8X Oversampling
- 3 Beam Laser Tracking
- Anti Shock mechanism
- Auto power Loading
- Local/Distance/Mono/Stereo Button
- Loudness, Mute , Clock button
- RCA Preamp Output
- Full Illumination & Carrying Case
- US/European Frequency Compatible
- ISO/DIN Chasis & Remote
- USB Input for MP3
- 200 Watts Maximum Total Output
- BlueTooth Wireless Tec. for Mobile Phone Hands free Operation

PLCDCS100 AM/FM-MPX Full Logic Cassette & CD Player w/Flip Down Detachable Face

- AM/FM-MPX-Stereo Digital PLL Tuning Radio CD Player
- CDC Control & Remote Controller
- Anti-Theft Flip-Down Detachable Face Panel
- Anti-Shock Mechanism
- Full Logic Auto Reverse Cassette Player
- Scan/Repeat/Random Control For CD
- 1-Bit D/A Converter for CD
- Full Detachable System
- Bass/Treble/Balance/Fader Control
- Full Night Illumination
- RCA Line Out Jack
- PLL Synthesizer Tuning
- 30 Station Memory: 18FM/12AM
- CD-RW Ready
- Power Supply: DC 13.8 Volts Negative Ground
- Maximum Output Power: 4 x 50 Watts
- Unit Dimensions: 7"W x 6.57"D x 1.96"H

PLCDCS90M AM/FM/MPX CD/MP3/WMA PLAYER Full Logic A/R Cassette

- AM/FM/MPX CD/MP3/WMA PLAYER
- CD/Cassette Player
- Full Logic Cassette
- Auto Reverse Cassette Player
- Intro/Repeat/Random Control for CD
- Loudness Control
- Bass/Treble/Balance/Fader Control
- Full Detachable System
- Full Night Illumination
- RCA Line Out Jack
- PLL Synthesizer Tuning
- 4x50 Watts
- 30 Memories 18FM/12AM
- CD-RW/Ready
- CDC Control
- Electronic Shock Protection

PLCDUSB78MP3 AM/FM-MPX CD/MP3 Player w/USB Input for MP3 & Motorized Slide Down Detachable Face

NEW 2008

- AM/FM-MPX Tuner CD/MP3 Player
- White LED Multi-Color LCD Display
- DSP Control: Pop, Rock, Classic, Flat
- Auto Best Station Memory/Preset Scan
- CD-R/CD-RW for MP3 Playback
- ID3 Tag Information Display of MP3 File Name
- Electronic Anti-Shock for CD/MP3
- Pause/Intro Scan/Repeat/Random
- Track Skip-Forward Reverse
- Mode Button: Radio, CD/MP3,AUX, USB
- 30 Station Memory: 18FM/12AM
- Audio Control: Volume/ Balance/Bass/Treble/ Fader
- 1 Bit D/A Converter
- 3 Beam Laser Tracking
- 8x Oversampling
- Auto Power Loading
- Local/Distance, Mono/Stereo Button
- Loudness, Mute, Clock Button
- RCA Preamp Output
- Full Illumination & Carrying Case
- US/European Frequency Compatible
- ISO/DIN Chassis & Remote Control
- USB Input For MP3, CD Changer Control
- Aux Input for Video
- 200 Watts Maximum Total Output

PLCD78M MP3/ CD-R/ RW Fold Down Detachable Front Panel AM/ FM-MPX Car Radio CD Player

- Fold Down Detachable Front Panel w/ Elegant Carry Case
- PLL Electronic Tuning Stereo AM/ FM-MPX Radio
- Anti-Vibration Auto-Insert CD Mechanism
- MP3/ CD-R/ RW Playback w/ ID Song Tag & ESP (Electronic Anti-Shock Protection)
- 30 Station Pre-Sets 12AM/ 18FM, Station Seek, Preset Scan
- Automatic Memory Preset Store Function
- Disc Scan/ Repeat/ Shuffle Play w/ Track Search Function
- Large Black Mask Multi Color LCD w/ Power Level Meter
- Clock Function & Display (DSP)
- Electronic Audio (Volume/ Bass/ Treble/ Balance/ Fader) Control
- Electronic Preset Equalizer (Pop/ Rock/ Classic/ Flat) Control
- Local/ Distant Selector (LOC)
- Stereo/ Mono Selector (MO/ST)
- Loudness Selector (LOU)
- Mute Selector (MUT)
- Mode Selector (MOD)
- Night Illumination
- LED Security Light
- Pair of Low Impedance RCA Plugs
- AUX-In Wire for Connection to External Devices for Playback
- 200 Watts Total Output (4 x 50 W)
- USA/ Europe Radio Compatibility
- Mounting Accessories
- Wireless Infrared Remote Control

PLCD73M MP3/ CD-R/ RW Full Detachable Front Panel AM/ FM-MPX Car Radio CD Player

- Active Detachable Front panel w/ Elegant Carry Case
- PLL Electronic Tuning Stereo AM/ FM-MPX Radio
- Anti-Vibration Auto-Insert CD Mechanism
- MP3/ CD-R/ RW Playback w/ ID Song Tag & ESP (Electronic Anti-Shock Protection)
- 30 Station Pre-sets 12AM/ 18FM, Station Seek, Preset Scan
- Automatic Memory Preset Store Function
- Disc Scan/ Repeat/ Shuffle Play w/ Track Search Function
- Large Black Mask Multi Color LCD w/ Power Level Meter
- Clock Function & Display (DSP)
- Encoder Audio (Volume/ Bass/ Treble/ Balance/ Fader) Control
- Electronic Preset Equalizer (Pop/ Rock/ Classic / Flat) Control
- Local/ Distant Selector (LOC)
- Stereo/ Mono Selector (MON)
- Loudness Selector (MUT)
- Mode Selector (MOD)
- Night Illumination
- LED Security light
- Pair of Low Impedance RCA Plugs
- Aux-In Wire for Connection to External Devices for Playback
- 200 Watts Total Output (4 x 50 W)
- USA/ Europe Radio Compatibility
- Mounting Accessories
- Wireless Infrared Remote Control

NEW 2008

PLCD58MP3 AM/FM-MPX Radio CD/MP3 Player w/Flip-Down Detachable Face

- AM/FM-MPX Tuner Compact Disc Player
- PLL Synthesizer Tuning
- Anti-Theft Flip Down Detachable Face
- White LED Multi-Color LCD Display
- DSP Control: Pop, Rock, Classic and Flat
- Auto Best Station Memory/Preset Scan
- CD-R/CD-RW/MP3 Playback
- ID3 Tag Information Display of MP3 File Name
- Electronic Anti-Shock for CD/MP3
- Pause/Intro Scan/Repeat/Random
- Track Skip-Forward Reverse
- Minute, Second and Track Display
- Preset EQ & Power Meter
- Mode Button: Radio, CD/MP3
- 30 Station Memory: 18FM/12AM
- 1-Bit D/A Converter
- Electronic Audio Control: Volume/Balance/Bass/ Treble/Fader
- 3 Beam Laser Tracking
- 8X Oversampling
- Anti-Shock Mechanism
- Auto Power Loading
- Local/Distance, Mono/Stereo Button
- Loudness, Mute, Clock Button
- RCA Preamp Output
- Full Illumination
- US/European Frequency Compatible
- ISO/DIN Chassis
- 200 Maximum Total Output
- Multi-Function Remote Control

PLCD42 AM/FM-MPX Reciever CD/CDR/CDR-W Player w/Full Detachable Face

- AM/FM-MPX Tuner Compact Disc Player
- PLL Synthesizer Tuning
- Anti-Theft Full Detachable Face
- White LED Multi Color LCD Display
- Multi-Function Remote Control
- 1-Bit D/A Converter 3 Beam Laser Tracking
- 8 x Oversampling
- Anti-Shock Mechanism Auto Power Loading
- Repeat/Random/Intro Scan
- Track Skip-Forward Reverse
- Minute, Second and Track Display
- Preset EQ & Power Meter
- 30 Station Memory: 18FM/12AM
- Electronic Audio Control: Volume/Balance/Bass/Treble/Fader
- DSP Control: Pop, Rock, Classic and Flat
- Digital Clock with Recall
- Auto Best Station Memory/Preset Scan
- Scan Button Local/Distance, Mono/Stereo
- Electronic Anti-Shock System
- Loudness and Mute Button
- RCA Preamp Output
- Full Illumination and Carrying Case
- US/European Frequency Compatible
- ISO/DIN Chassis
- 200 Maximum Total Watts
- CDR/CD-RW Compatible

PLCD52 AM/FM-MPX Receiver CD/CDR Player w/Detachable Face

- AM/FM-MPX Receiver Compact Disc Player
- Anti-Theft Detachable Face
- 1 Bit D/A Converter/3 Beam Laser Tracking
- 8X Oversampling Digital Filter
- 30 Station Memory: 18 FM/12 AM
- Digital Clock with Recall
- Volume, Balance, Bass, Treble & Fader Controls
- RCA Pre-Amp Output
- US/European Frequency Compatible
- Power Output: 160 Watts
- CD-R Compatible

CD Player Head Units

NEW 2008

PL97M4 Car Radio With MP4 USB/SD/AUX In Player

- Fix Panel
- Electronic Anti-Shock
- Compatible With Mp3/Wma
- Repeat/Program/Random/Intro Play
- Am/Fm Pll Stereo Receiver
- Auto Memory Store/Preset Scan
- 30 Preset Stations
- Preset Eq (Pop/Rock/Classic)
- Electronic Audio Controls (Vol/Bas/Tre/Bal/Fad)
- Mute/Clock
- Multicolor Lcd Display
- 4x40w Power Output
- Iso Mounting Chassis
- Two Av Output
- Aux In On Panel Face
- Remote Control

NEW 2008

PL90MU Car Radio With MP3 USB/SD/AUX IN Player

- Electronic Anti-Shock
- Compatible with Mp3/WMA
- Repeat/Program/Random/Intro Play
- AM/FM PLL Stereo Receiver
- Auto Memory Store/Preset Scan
- 30 Preset Stations
- Preset EQ(POP/Rock/Classic)
- Electronic Audio Controls(Vol/Bas/Tre/Bal/Fad)
- Mute/Clock
- LCD Blue Mask Display
- 4x40W Power Output
- Aux in on panel face
- ISO Mounting Chassis

PLCD27 AM/FM CD Player w/Detachable Face

- 30 preset Station 18AM/12FM
- Electronic Audio Processor
- Supports CD Text
- Encoder Volume
- RCA Line Output
- Detachable Faceplate
- Full Function Remote Control
- Station Auto Store Search and Preset Scan
- Output power 4 x 45 Watts
- 180 Watts Max Total Output

NEW 2008

PLCD26M MP3/ CD-R/ RW Full Detachable Front Panel Am/ FM-MPX Car Radio CD Player

- Detachable Front Panel w/ Elegant Carry Case
- AM/FM-MPX Radio
- Anti-Vibration Auto-Insert CD Mechanism
- MP3/ CD-R/ RW Playback w/ ID Song Tag & ESP (Electronic Anti-Shock Protection)
- Large Black Mask Multi Color LCD w/ Power Level Meter
- Disc Intro/ Random/ Repeat Play w/ Track Search Function
- Clock Function & Display (DSP)
- Electronic Audio (Volume/ Bass/ Treble/ Balance/ Fader) Control
- Electronic Preset Equalizer
- (Pop/ Rock/ Classic/ Flat) Control
- Local/ Distant Selector (LOC)
- Mute Selector (MUT)
- Mode Selector (MOD)
- Night Illumination
- LED Security Light
- Pair of Low Impedance RCA Plugs
- AUX-In Wire for Connection to External Devices for Playback
- 160 Watts Total Output (4 x 40 W)
- High Output Power
- Mounting Accessories

PLCD21 AM/FM-MPX 2 Band Radio CD Player w/Semi-Detachable Face

- CD/CD-R/CD-RW Compatible
- AM/FM 2 Band Radio
- Manual Tuning
- LO/DX Selection
- Anti-Shock Mechanism
- Blue Color LCD
- Semi-Detachable Front Panel
- Intro/Repeat/Random Function
- Volume/Bass/Treble/Balance/Fader Control
- MO/ST Selection
- Mute Function
- Auto Power On
- RCA Out Socket
- AUX on Front Panel for direct connection of Alternate Audio Sources (MP3 Player/DVD/etc)
- Total Output: 4X40 Watts

PLIPG1 iPod 3.5mm Stereo to RCA Adaptor

- 3.5mm Stereo to RCA Adaptor
- Allows direct connection of any Headphone equipped Audio device to your existing RCAs on the Head Unit
- Easily mounted under dash for convenience
- Stereo 3.5mm Audio Cable included

PLCD23A AM/FM-MPX 2 Band Radio CD Player w/ Detachable Face

- Auto Loading CD Mechanism
- Full Detachable System
- Full Stereo System
- Bass/Treble Control
- Big Size LCD Display
- Manual Tuning
- LO/DX Control
- RCA Line Out Jack
- Front Panel Auxiliary Input
- Random/Repeat/Intro
- Power Requirement: DC 12 V
- Chasis Dimensions: 7" W x 1.96" H x 5.9"" D

PLR24MPF AM/FM Receiver MP3 Playback with USB/SD/AUX-IN

NEW 2008

- AM/FM 2-Band Radio
- Built-In USB/SD Ports
- LCD Digital Display
- ID3 Tag Function
- Tone Control
- Rotary Tuning/Volume Control
- AUX-IN Jack
- Last-Track Memory
- 10 Songs Skip Up/ 10 Songs Skip Down
- Folder Up/Down Function
- Mute Function
- Clock Function
- 2-Channel output

PLE420P In-Dash 4 Band Parametric Equalizer

NEW 2008

- Half Din Size
- Pre-amp Line & Aux Inputs Via RCA Jacks
- Input Gain Adjustments
- 3.5mm DVD Input Jack
- DVD/Aux Input Selector
- Rotary Fader
- Output Volume Control
- Sub Output Voulme Control
- Sub Crossover Frequency 30-250 Hz Variable
- 4 Band Parametric Equalizer
- Blue Light Illumination
- Dimensions:7" x 4.13"x 1.10" (W x D x H)

PLE430PX In-Dash 4 Band Parametric Equalizer/Crossover

- Half Din Size
- Gold Plated Pre-amp Line & Aux Inputs Via RCA Jacks
- Input Gain Adjustments
- Subwoofer Outputs
- Remote Input Wire
- Rotary Fader
- Output Volume Control
- Subwoofer Phase Switch (0˚/180˚)
- 18dB Boost Cut for Bass/MidBass/Mid/High
- 4 Band Parametric Equalizer
- Dual Color Illumination
- Output Voltage: 7V RMS @ 0.05% THD
- S/N Ratio: 110dB
- Dimensions:7" x 4.13"x 1.10" (W x D x H)

PLE520P 5-Band Rotary Control Pre-Amp Parametric Equalizer With Subwoofer

- Half-din size
- Pre-amp Line & Aux RCA Inputs
- Output Volume Control
- Input Gain Adjustments
- Sub Output
- Frequency Gain Control
- 5 B & Parametric Control
- 12dB Boost/Cut
- Rotary Band Control
- Rotary Fader
- Volume Control
- 6 Channel RCA Outputs
- Fully Isolated DC to DC Power Supply
- Signal to Noise Ratio: >90dB
- Frequency Response: 15hz - 30khz
- Dimensions: 1"h x 7"w x 5.5"D

PLE702B 7-Band Equalizer Amplifier w/Subwoofer Preamp Output

- 1/2 DIN mounting size
- 7 Band graphic equalizer
- 100 watts x 2 max output
- 2/4 Speaker hook-up
- 2 Channel RCA inputs
- Volume/fader control
- Preamp subwoofer output
- 18dB gain for subwoofer
- LED display
- S/N Ratio: >90dB

PLE720P Parametric Equalizer & Crossover

- Gold Plated RCA Front/ Rear/ Subwoofer Outputs
- Gold Plated RCA Low Level Inputs (2 Pairs)
- Input Gain Adjustments
- Remote Input Wire
- Subwoofer Phase Switch (0/ 180)
- Dual Color Illumination
- 18dB Boost Cut for Bass/ Mid Bass/ Mid/ Hi
- Output Voltage: 7 Volts RMS @ 0.05% THD
- S/N Ratio: 110dB

PLE730R 7-Band Rotary Control Pre-Amp Equalizer w/Subwoofer Control

- Half-din size
- RCA pre-amp inputs
- Output volume control
- Rotary band control
- Rotary fader
- 6 Channel RCA outputs
- 12dB boost/cut
- Subwoofer gain control
- Input gain adjustments
- Line & aux inputs
- Led power level meter
- Remote power on/off
- Defeat & aux switch
- Signal to noise ratio: >90dB
- Frequency response: 15Hz - 30kHz
- Dimensions: 1"H x 7"W x 4.75"D

NEW 2008

PLE755S 7-Band Equalizer w/Subwoofer Crossover & Bass Boost

- Half Din mounting size
- 2 Channel RCA input jack
- 6 Channel RCA output with 2 channel subwoofer output
- LED display
- Fully isolated DC to DC power supply
- S/n ratio: >90dB

PLXR2 Electronic Subwoofer Crossover Network w/12dB Bass Boost

- Electronic Low Pass Crossover Network
- Low Level RCA Inputs
- High Level Line Inputs
- Variable Gain Adjustment
- LED Power Indicator
- 12dB Bass Boost

PLXR5 2-Way Electronic Crossover Network With Remote Subwoofer Level Control

- Hi-pass Crossover Adjustable Frequency From 80 To 2.5K Hz
- Lo-pass Crossover Adjustable Frequency From 35 To 400 Hz
- Variable Bass Boost Level From 0 To 12 dB
- Subwoofer Phase Shift 0/180 Degrees
- Hi-pass Gain Control
- Lo-pass Gain Control
- Lo-pass Stereo/Mono Selector
- LED Power On Indicator
- Remote Power On/Off
- Remote Subwoofer Level Control
- Dimensions: 6.29"W x 1.45"H x 5.11"D

PLXR8 3 Way Electronic Crossover w/Remote Subwoofer Control

- Hi-Pass Crossover: 32Hz-320Hz (Front and Rear)
- x20 Freq. Multiplier (Front)
- Low Pass Crossover: 32Hz-320Hz (Subwoofer)
- Variable Bass Freq.:32Hz-320Hz
- Boost Level: 0 - 12dB
- 18dB per Octave Crossover Slopes
- Parallel Input/Mixed in/out Switch
- 8 Channel Total Output
- Individual Gain Controls
- Remote Subwoofer Level Control
- Power On LED Indicator
- Dimensions: 8.5"H x 5.93"W x 1.625"D

PLA2200 2 Channel 1400 Watt Bridgeable MOSFET Amplifier

- 700 Watts x 2 Output
- 1400 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power & Protection LED Indicators
- Low Level Inputs
- Gold Plated RCA Inputs & Outputs
- Slim Size Amplifier Design For Easy Installation
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Soft Turn-On Circuit
- Remote Turn On/Off
- S/N Ratio: 95db
- T.H.D: <0.04%
- Freq. Response: 15Hz - 30KHz
- Dimensions: 10.63'' H x 1.42'' W x 8.75'' L

PLA2210 2 Channel 1800 Watt Bridgeable MOSFET Amplifier

- 900 Watts x 2 Output
- 1800 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power & Protection LED Indicators
- Low Level Inputs
- Gold Plated RCA Inputs & Outputs
- Slim Size Amplifier Design For Easy Installation
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Soft Turn-On Circuit
- Remote Turn On/Off
- S/N Ratio: 95db
- T.H.D: < 0.04%
- Freq. Response: 15Hz - 30KHz
- Dimensions: 10.63'' H x 1.42'' W x 12'' L

PLA2220 2 Channel 2400 Watt Bridgeable MOSFET Amplifier

- 1200 Watts x 2 Output
- 2400 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power & Protection LED Indicators
- Low Level Inputs
- Gold Plated RCA Inputs & Outputs
- Slim Size Amplifier Design For Easy Installation
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Soft Turn-On Circuit
- Remote Turn On/Off
- S/N Ratio: 95db
- T.H.D: < 0.04%
- Freq. Response: 15Hz - 30KHz
- Dimensions: 10.63'' H x 1.42'' W x 15.75'' L

PLA2230 3000 Watts 2 Channel High Power MOSFET Amplifier

- 1500 Watts x 2 Output
- 3000 Watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Variable Bass Boost
- Sub Sonic Filter
- Thermal / Overload / Short Circuit Protection
- MOSFET PWM Power Supply
- Power & Protection LED Indicators
- Low Level Inputs
- Gold Plated RCA Inputs & Outputs
- Slim Size Amplifier Design For Easy Installation
- Dimensions: 10.63'W x1.42'H x 17'L

PLA2260 2 Channel 4000 Watt High Power MOSFET Amplifier

- 2000 Watts x 2 Output
- 4000 Watts x 1 Bridged Output
- Variable Hi/ Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Variable Bass Boost
- Sub Sonic Filter
- Thermal/ Overload/ Short Circuit Protection
- MOSFET PWN Power Supply
- Power & Protection LED indicators
- Low Level Inputs
- Gold Plated RCA Inputs & Outputs
- Slim Size Amplifier Design for Easy Installation
- Dimensions: 10.63'' (W) x 1.42'' (H) x 21'' (L)

PLA4120 1000 Watts 4 Channel High Power MOSFET Amplifier

- 250 Watts x 4 Output
- 500 Watts x 2 Bridged Output (250W x 2 + 500W x 1)
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual Switchable Bass Boost
- Dual MOSFET PWM Power Supplies
- Variable Input Level (Gain) Control
- Thermal / Overload / Short Circuit Protection
- Power & Protection LED Indicators
- Low Level Inputs
- Gold Plated RCA Inputs & Outputs
- Slim Size Amplifier Design For Easy Installation
- Dimensions: 10.63'W x1.42'H x 13'L

PLA4200 4 Channel 2000 Watt Bridgeable MOSFET Amplifier

- 500 Watts x 2 Output
- 1000 watts x 2 Bridged Output (500W x 2 + 1000W x 1)
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual MOSFET PWM Power Supplies
- Variable Input Level (Gain) Control
- Dual Switchable Bass Boost
- Power & Protection LED Indicators
- Low Level Inputs
- Gold Plated RCA Inputs & Outputs
- Slim Size Amplifier Design For Easy Installation
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Soft Turn-On Circuit
- Remote Turn On/Off
- S/N Ratio: 95db
- T.H.D: &< 0.04%
- Freq. Response: 15Hz - 30KHz
- Dimensions: 10.63'' H x 1.42'' W x 14.25'' L

Amplifiers

PLA1200 1900 Watts Mono Block MOSFET Power Amplifier

- Variable Low Electronic Crossover Network
- Variable Input Level (Gain) Control
- Variable Bass Boost
- 2 Ohm Stable
- Sub Sonic Filter
- Thermal / Overload / Short Circuit Protection
- MOSFET PWM Power Supply
- Power & Protection LED Indicators
- Phase Control 0-180 degree
- Low Level Inputs
- Gold Plated RCA Inputs & Outputs
- Slim Size Amplifier Design For Easy Installation
- Dimensions: 10.63'W x1.42'H x 12'L

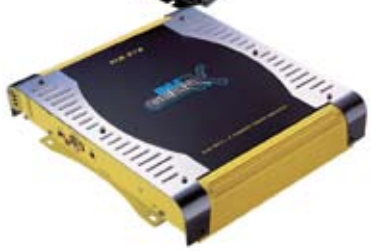

PLA219 2 Channel 240 Watt High Power Amplifier

- 120 Watts x 2 Output
- Variable Input Level (Gain) Control
- Power ON LED Indicador
- Hi / Lo Impendance Input
- Illuminated Top Panel
- Overload / Short Circuit Protection
- Anti-Thump Turn-On
- Dimensions: 2.32" H x 11.06" W x 8.25" L

PLA419 4 Channel 400 Watt High Power Amplifier

- 100 Watts x 4 Output
- Variable Input Level (Gain) Control
- Power ON LED Indicador
- Hi / Lo Impendance Input
- Illuminated Top Panel
- Overload / Short Circuit Protection
- Anti-Thump Turn-On
- Dimensions: 2.32" H x 11.06" W x 9.25" L



PLA2150 2 Channel 600 Watt Bridgeable MOSFET Amplifier

- 300 Watts x 2 Output
- 600 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Dimensions: 2.32" H x 11.06" W x 8.25" L

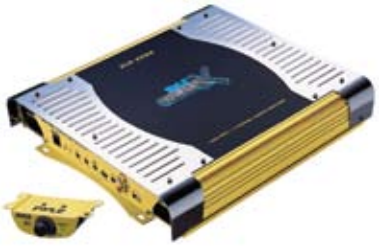

PLA2250 2 Channel 1000 Watt Bridgeable MOSFET Amplifier

- 500 Watts x 2 Output
- 1000 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Dimensions: 2.32" H x 11.06" W x 11" L

PLA2450 2 Channel 1400 Watt Bridgeable MOSFET Amplifier

- 700 Watts x 2 Output
- 1400 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Dimensions: 2.32" H x 11.06" W x 13.5" L

PLA2550 2 Channel 1600 Watt Bridgeable MOSFET Amplifier

- 800 Watts x 2 Output
- 1600 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Dimensions: 2.32" H x 11.06" W x 15" L

PLA2350 2 Channel 1200 Watt Bridgeable MOSFET Amplifier

- 600 Watts x 2 Output
- 1200 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Dimensions: 2.32'' H x 11.06'' W x 12'' L

PLA2650 2 Channel 1800 Watt Bridgeable MOSFET Amplifier

- 900 Watts x 2 Output
- 1800 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Dimensions: 2.32'' H x 11.06'' W x 17'' L

PLA2750 2 Channel 2400 Watt Bridgeable MOSFET Amplifier

- 1200 Watts x 2 Output
- 2400 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Dimensions: 2.32'' H x 11.06'' W x 19'' L

PLA2850 2 Channel 4000 Watt Bridgeable MOSFET Amplifier

- 2000 Watts x 2 Output
- 40 00 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Dimensions: 2.32'' H x 11.06'' W x 21'' L

PLA4150 4 Channel 1000 Watt Bridgeable MOSFET Amplifier

- 250 Watts x 4 Output
- 500 Watts x 2 Bridged Output (250W x 2 + 500W x 1)
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Variable Input Level (Gain) Control
- MOSFET PWM Power Supply
- Power ON LED Indicator
- LED Protection Indicator
- HI/Lo Impedance Input
- Illuminated Top Panel
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on
- Tri-Mode Configurable
- Dimensions: 2.32'' H x 11.06'' W x 12'' L

PLA4300D 4000W Mono Block MOSFET Digital Power Amplifier

- Mono Block Subwoofer Amplifier
- Frequency Response 20 Hz-250 Hz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 400W MONO RMS Power at @ 4 Ohms
- 700W MONO RMS Power at @ 2 Ohms
- 1200W MONO RMS Power at @ 1.3 Ohms
- 4000W MONO Maximum Power Output
- 1 Ohm Stable
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB
- Gold RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Variable Subsonic Filter (15Hz -40Hz 24dB / Octave)
- Phase Control 0-180 degree
- Remote Bass Boost
- Input Impedance: 10K Ohms
- Soft Turn On/ Off
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Illuminated Top Panel
- Dimensions: 2.32'' H x 11.06'' W x 15'' L

Amplifiers

PLA2180 2 Channel 600 Watt Bridgeable MOSFET Amplifier

- 300 Watts X 2 Output
- 600 Watts X 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost (0 ± 18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- Blue LED Level Display
- S/N Ratio: > 95dB
- THD: Frequency Response:15Hz-30 KHz
- Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Dimensions:10.9" (W) x 2.7" (H) x 8.25" (L)

PLA2280 2 Channel 1000 Watt Bridgeable MOSFET Amplifier

- 500 Watts X 2 Output
- 1000 Watts X 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost (0 ± 18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- S/N Ratio: > 95dB
- THD: Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Blue LED Level Display
- Dimensions:10.9"X2.7"X12" (WxHxL)

PLA2380 2 Channel 1400 Watt Bridgeable MOSFET Amplifier

- 700 Watts X 2 Output
- 1400 Watts X 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost (0 ± 18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- Blue LED Level Display
- Remote Bass Boost
- S/N Ratio: > 95dB
- THD: Frequency Response:15Hz-30 KHz
- Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Dimensions:10.9"X2.7X13.5" (WxHxL)

PLA2480 2 Channel 1600 Watt Bridgeable MOSFET Amplifier

- 800 Watts X 2 Output
- 1600W x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost (0 ± 18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- Blue LED Level Display
- Remote Bass Boost
- S/N Ratio: > 95dB
- THD: Frequency Response:15Hz-30 KHz
- Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Dimensions:10.9"X2.7"X15" (WxHxL)

PLA2580 2 Channel 1800 Watt Bridgeable MOSFET Amplifier

- 900 Watts X 2 Output
- 1800W x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost (0 ± 18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- S/N Ratio: > 95dB
- THD: Frequency Response:15Hz-30 KHz
- Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Blue LED Level Display
- Dimensions:10.9"X2.7"X17" (WxHxL)

PLA2680 2 Channel 2400 Watt Bridgeable MOSFET Amplifier

- 1200 Watts X 2 Output
- 2400W x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost (0 ± 18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- Remote Bass Boost
- S/N Ratio: > 95dB
- THD: Frequency Response:15Hz-30 KHz
- Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Blue LED Level Display
- Dimensions:10.9"X2.7"X19" (WxHxL)

PLA4180 4 Channel 1000 Watt Bridgeable MOSFET Amplifier

- 250 Watts X 4 Output
- 500W x 2 Bridged Output (250 x 2 + 500 x 1)
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual Variable Bass Boost (0 ± 18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- S/N Ratio: > 95dB
- THD: Frequency Response:15Hz-30 KHz
- Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Tri-Mode Configurable
- Blue LED Level Display
- Dimensions:10.9"X2.7"X12" (WxHxL)

PLA4380 4 Channel 2000 Watt Bridgeable MOSFET Amplifier

- 500 Watts X 4 Output
- 1000W x 2 Bridged Output (500 x 2 + 1000 x 1)
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual Variable Bass Boost (0 ±18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- Blue LED Scanning Illumination
- Remote Bass Boost
- S/N Ratio: > 95dB
- THD: Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Tri-Mode Configurable
- Dimensions:10.87"X2.26"X17" (WxHxL)

PLA3000D 2400 Watt Class-D Mono Block MOSFET Digital Amplifier

- Mono Block Subwoofer Amplifier
- 1Ohm Stable
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB
- Gold Plated RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal Protection
- Overload Protection
- Short Circuit Protection
- Variable Subsonic Filter (15Hz-10Hz, 24dB/Octave)
- Phase Control 0-180 Degree
- Remote Bass Control
- Input Impedance: 10K Ohms
- Soft Turn On/Off
- Advanced Protection Circuitry
- S/N Ratio: > 90dB
- Heavy Duty Power Coated Heatsink
- Dimensions: 10.9" x 2.7" x 15" (WxHxL)

PLA4280 4 Channel 1400 Watt Bridgeable MOSFET Amplifier

- 350 Watts X 4 Output
- 700W x 2 Bridged Output (350 x 2 + 700 x 1)
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual Variable Bass Boost (0 ± 18dB @ 60Hz)
- Variable Input Level (Gain) Control
- Remote Turn On/Off
- Gold Plated RCA Inputs
- High Level Molex Input
- Power On LED Indicator
- LED Protection Indicator
- Blue LED Scanning Illumination
- Remote Bass Boost
- S/N Ratio: > 95dB
- THD: Thermal Protection
- Overload Protection
- Short Circuit Protection
- Anti-thump Turn-on
- Tri-Mode Configurable
- Dimensions:10.87"X2.26"X15" (WxHxL)

Amplifiers

PLAD212 2 Channel 800 Watt Bridgeable MOSFET Amplifier

- 2x100W RMS at 4 Ohms
- 2x400W MAX at 4 Ohms
- 1x400W MAX at 4 Ohms Bridged
- 2x175W RMS at 2 Ohms
- Electronic Crossover Network
- Bass Boost Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Gold Plated RCA Inputs
- Line Outs for Left and Right Channel
- Low Pass Filter Control
- High Pass Filter Control
- Remote Bass Level Control
- Power and Protection LED Indicators
- Red Lighting Illumination
- Side Leg Mounting
- THD: S/N Ratio: >90dB
- Input Sensitivity : 100mV ~4V
- Channel Separation : >65dB
- Freq. Response : 10Hz ~ 30KHz
- Patent Pending
- Soft Turn-on/Turn-off
- Dimensions : 8.6”(W) x 2.74”(H) x 7”(L)

PLAD213 2 Channel 1000 Watt Bridgeable MOSFET Amplifier

- 2x150W RMS at 4 Ohms
- 2x500W MAX at 4 Ohms
- 1x600W MAX at 4 Ohms Bridged
- 2x250W RMS at 2 Ohms
- Electronic Crossover Network
- Bass Boost Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Gold Plated RCA Inputs
- Line Outs for Left and Right Channel
- Low Pass Filter Control
- High Pass Filter Control
- Remote Bass Level Control
- Power and Protection LED Indicators
- Red Lighting Illumination
- Side Leg Mounting
- THD: S/N Ratio: >90dB
- Input Sensitivity : 100mV ~4V
- Channel Separation : >65dB
- Freq. Response : 10Hz ~ 30KHz
- Patent Pending
- Soft Turn-on/Turn-off
- Dimensions : 8.6”(W) x 2.74”(H) x 8.7”(L)

PLAD214 2 Channel 1600 Watt Bridgeable MOSFET Amplifier

- 2x250W RMS at 4 Ohms
- 2x800W MAX at 4 Ohms
- 1x900W MAX at 4 Ohms Bridged
- 2x400W RMS at 2 Ohms
- Electronic Crossover Network
- Bass Boost Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Gold Plated RCA Inputs
- Line Outs for Left and Right Channel
- Low Pass Filter Control
- High Pass Filter Control
- Remote Bass Level Control
- Power and Protection LED Indicators
- Red Lighting Illumination
- Side Leg Mounting
- THD: S/N Ratio: >90dB
- Input Sensitivity : 100mV ~4V
- Channel Separation : >65dB
- Freq. Response : 10Hz ~ 30KHz
- Patent Pending
- Soft Turn-on/Turn-off
- Dimensions : 8.6”(W) x 2.74”(H) x 9.8”(L)

PLAD215 2 Channel 2000 Watt Bridgeable MOSFET Amplifier

- 2x500W RMS at 4 Ohms
- 2x1000W MAX at 4 Ohms
- 1x1300W MAX at 4 Ohms Bridged
- 2x700W RMS at 2 Ohms
- Electronic Crossover Network
- Bass Boost Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Gold Plated RCA Inputs
- Line Outs for Left and Right Channel
- Low Pass Filter Control
- High Pass Filter Control
- Remote Bass Level Control
- Power and Protection LED Indicators
- Red Lighting Illumination
- Side Leg Mounting
- THD: S/N Ratio: >90dB
- Input Sensitivity : 100mV ~4V
- Channel Separation : >65dB
- Freq. Response : 10Hz ~ 30KHz
- Patent Pending
- Soft Turn-on/Turn-off
- Dimensions : 8.6”(W) x 2.74”(H) x 17.7”(L)

PLAD412 4 Channel 1000 Watt Bridgeable MOSFET Amplifier

- 4x100W RMS at 4 Ohms
- 4x250W MAX at 4 Ohms
- 2x400W MAX at 4 Ohms Bridged
- 4x150W RMS at 2 Ohms
- Electronic Crossover Network
- Bass Boost Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Tri-Mode Capable
- Gold Plated RCA Inputs
- Line Outs for 1 and 2 Channel
- Low Pass Filter Control
- High Pass Filter Control
- Remote Bass Level Control
- Power and Protection LED Indicators
- Red Lighting Illumination
- Side Leg Mounting
- THD: S/N Ratio: >90dB
- Input Sensitivity : 100mV ~4V
- Channel Separation : >65dB
- Freq. Response : 10Hz ~ 30KHz
- Patent Pending
- Soft Turn-on/Turn-off
- Dimensions : 8.6"(W) x 2.74"(H) x 11.4"(L)

PLAD413 4 Channel 2000 Watt Bridgeable MOSFET Amplifier

- 4x200W RMS at 4 Ohms
- 4x500W MAX at 4 Ohms
- 2x800W MAX at 4 Ohms Bridged
- 4x350W RMS at 2 Ohms
- Electronic Crossover Network
- Bass Boost Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Tri-Mode Capable
- Gold Plated RCA Inputs
- Line Outs for 1 and 2 Channel
- Low Pass Filter Control
- High Pass Filter Control
- Remote Bass Level Control
- Power and Protection LED Indicators
- Red Lighting Illumination
- Side Leg Mounting
- THD: S/N Ratio: >90dB
- Input Sensitivity : 100mV ~4V
- Channel Separation : >65dB
- Freq. Response : 10Hz ~ 30KHz
- Patent Pending
- Soft Turn-on/Turn-off
- Dimensions : 8.6"(W) x 2.74"(H) x 12.6"(L)

PLAD618 6 Channel 2000 Watt Bridgeable MOSFET Amplifier

- 4x100W+2x250W RMS at 4 Ohms
- 4x250W+2x500W MAX at 4 Ohms
- 2x400W+1x900W MAX at 4 Ohms Bridged
- 4x175W+1x400W RMS at 2 Ohms
- Electronic Crossover Network
- Bass Boost Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Tri-Mode Capable
- Gold Plated RCA Inputs
- Line Outs for 1 and 2 Channel
- Low Pass Filter Control
- High Pass Filter Control
- Remote Bass Level Control
- Power and Protection LED Indicators
- Red Lighting Illumination
- Side Leg Mounting
- THD: S/N Ratio: >90dB
- Input Sensitivity : 100mV ~4V
- Channel Separation : >65dB
- Freq. Response : 10Hz ~ 30KHz
- Patent Pending
- Soft Turn-on/Turn-off
- Dimensions : 8.6"(W) x 2.74"(H) x 19.7"(L)

PLAD3300D 3600 Watt Mono Block MOSFET Digital Amplifier

- 1x600W RMS at 4 Ohms
- 1x1800W MAX at 2 Ohms
- 1x3600W MAX at 1.3 Ohms
- Mono Block Subwoofer Amplifier
- 1 Ohm Stereo Stable
- MOSFET Power Supply
- PWM (Pulse-Width-Modulated) System
- Double Sided Epoxy PCB Circuit Board
- Gold Plated RCA Inputs
- Custom Terminal Block for Speaker Connections
- Thermal, Overload & Short Protection
- Variable Low pass Filter (50Hz~150Hz,24dB/Octave)
- Variable Subsonic Filter (15Hz~40Hz,24dB/Octave)
- Phase Control 0-180 Degree
- Remote Bass Level Control
- Input Impedance:10K Ohms
- Soft Turn-on/Turn-off
- Side Leg Mounting
- Red Lighting Illumination
- THD: & 0.1%.
- S/N Ratio: & 90dB
- Input Sensitivity : 200mV ~8V
- Freq. Response : 15Hz ~ 150KHz
- Patent Pending
- Heavy Duty Power Coated Heatsink
- Dimensions : 8.6"(W) x 2.74"(H) x 15"(L)

Blue Label Speakers

PL42BL 4" 180 Watt Two-Way Speakers

- One Pair 4" Two-way Speaker Systems
- Power Handling: 90 Watts Rms / 180 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 4" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1/2" Neodymium Film Dome Tweeter
- Impedance: 4 Ohm
- Sensitivity: 88 dB
- Frequency Response: 110Hz - 20Khz
- Mounting Depth: 1.625"

PL53BL 5.25" 200 Watt Three-Way Speakers

- One Pair 5.25" Three-way Speaker Systems
- Power Handling: 100 Watts Rms / 200 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 5.25" Size Fits Oem Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 bB
- Frequency Response: 100Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth:2"

PL63BL 6.5" 360 Watt Three-Way Speakers

- One Pair 6.5" Three-way Speaker Systems
- Power Handling: 180 Watts Rms / 360 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 6.5" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 dB
- Frequency Response: 90Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 2"

PL463BL 4" x 6" 240 Watt Three-Way Speakers

- One Pair 4" x 6" Three-way Speaker Systems
- Power Handling: 120 Watts Rms / 240 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 4" X 6" Size Fits Oem Locations
- Blue Poly Injection Cone
- 20 Oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 dB
- Frequency Response: 95Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 1.75"

PL573BL 5" x 7"/6" x 8" 300 Watt Three-Way Speakers

- One Pair 5" x 7"/6" x 8" Three-way Speaker Systems
- Power Handling: 150 Watts Rms / 300 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 5" x 7"/6" X 8" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- Frequency Response: 80Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth:2.25"

PL683BL 6" x 8" 360 Watt Three-Way Speakers

- One Pair 6" x 8" Three-way Speaker Systems
- Power Handling: 180 Watts Rms / 360 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 6" x 8" Size Fits OEM Locations
- Blue Poly Injection Cone
- 40 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 91 dB
- Frequency Response: 70Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 2.365"

PL6984BL 6"x 9" 400 Watt Four-Way Speakers

- One Pair 6" X 9" Four-way Speaker Systems
- Power Handling: 200 Watts Rms / 400 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1.25" High Temperature ASV Voice Coil
- Standard 6" X 9" Size Fits OEM Locations
- Blue Poly Injection Cone
- 50 Oz Magnet Structure
- 1-1/2" Film Dome Midrange
- 1" Film Dome Tweeter
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 92 dB
- Frequency Response: 50Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 3.625"

Red Label Speakers

PLRL42 4” 140 Watt Electroplated Red Cone Two-Way Speakers

- Pair 4” Two-Way Speaker System
- Electroplated Red Polypropylene Cone
- Butyl Rubber Surround
- 1” High Temperature Ferro Fluid Enhanced Voice Coil
- 1” Mylar Dome Tweeter
- 70 Watts RMS/140 Watts Peak Power
- 4 Ohm Impedance
- Freq. Response: 50Hz - 20kHz
- Rubber Magnet Boot
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2”

PLRL52 5.25” 160 Watt Electroplated Red Cone Two-Way Speakers

- 5.25” Electroplated Red Polypropylene Cone
- Rubber Edge
- 1” High Temperature Ferro Fluid Enhanced Voice Coil
- 1” Mylar Dome Tweeter
- 80 Watts RMS/160 Watts Peak Power
- 4 Ohm Impedance
- Freq. Response: 56Hz - 20kHz
- Rubber Magnet Boot
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2”

PLRL62 6.5” 200 Watt Electroplated Red Cone Two-Way Speakers

- Pair 6.5” Two-Way Speaker System
- Electroplated Red Polypropylene Cone
- Butyl Rubber Surround
- 1” High Temperature Ferro Fluid Enhanced Voice Coil
- 1” Mylar Dome Tweeter
- 100 Watts RMS/200 Watts Peak Power
- 4 Ohm Impedance
- Freq. Response: 66Hz - 20kHz
- Rubber Magnet Boot
- Mounting Depth:2.15”

PLRL462 4”x 6” 180 Watt Electroplated Red Cone Two-Way Speakers

- Pair 4”x 6” Two-Way Speaker System
- Electroplated Red Polypropylene Cone
- Butyl Rubber Surround
- 1” High Temperature Ferro Fluid Enhanced Voice Coil
- 1” Mylar Dome Tweeter
- 90 Watts RMS/180 Watts Peak Power
- 4 Ohm Impedance
- Freq. Response: 66Hz - 20kHz
- Rubber Magnet Boot
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1.85”

PLRL572 5”x 7”/6” X 8” 200 Watt Electroplated Red Cone Two-Way Speakers

- Pair 5”x 7” Two-Way Speaker System
- Electroplated Red Polypropylene Cone Rubber Edge
- 1” High Temperature Ferro Fluid Enhanced Voice Coil
- 1” Mylar Dome Tweeter
- 100 Watts RMS/200 Watts Peak Power
- 4 Ohm Impedance
- Freq. Response: 50Hz - 20kHz
- Rubber Magnet Boot Cover
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.25”

PLRL693 6” X 9” 400 Watt Electroplated Red Cone Three-Way Speakers

- Pair 6”x 9” Three-way Speaker System
- Electroplated Red Polypropylene Cone
- Butyl Rubber Surround
- 1” High Temperature Ferro Fluid Enhanced Voice Coil
- 2” Pole Mounted Aluminum Midrange
- 1” Mylar Dome Tweeter
- 200 Watts RMS/400 Watts Peak Power
- 4 Ohm Impedance
- Freq. Response: 45Hz - 22kHz
- Rubber Magnet Boot Cover
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 3.04”

PLCH42 One Pair Super Slim 4" 2-Way Speaker Systems

- Slim 4" Size Fits OEM Locations
- High Quality Injection Woofer Cone
- Butyl Rubber Surround
- Concealment Magnet
- 1" High Temperature ASV Voice Coil
- 1/2" PEI Dome Tweeter
- Power Handling: 70 Watts RMS / 140 Watts MAX
- 10 oz Magnet Structure
- Impedance: 4 Ohm
- Sensitivity: 82 dB
- Frequency Response: 70Hz-20KHz
- Includes Grills Wires and Installation Hardware

PLCH52 One Pair Super Slim 5.25" 2-Way Speaker Systems

- Slim 5.25" Size Fits OEM Locations
- High Quality Injection Woofer Cone
- Butyl Rubber Surround
- Concealment Magnet
- 1" High Temperature ASV Voice Coil
- 1/2" PEI Dome Tweeter
- Power Handling: 80 Watts RMS / 160 Watts MAX
- 12 oz Magnet Structure
- Impedance: 4 Ohm
- Sensitivity: 84dB
- Frequency Response: 60Hz-20KHz
- Includes Grills Wires and Installation Hardware

PLCH62 One Pair Super Slim 6.5" 2-Way Speaker Systems

- Slim 6.5" size fits OEM locations
- High Quality injection woofer cone
- Butyl rubber surround
- Concealment magnet
- 1" high temperature ASV voice coil
- 1/2" PEI dome tweeter
- Power handling: 120 Watts RMS / 240 Watts MAX
- 15 oz magnet structure
- Impedance: 4 Ohm
- Sensitivity: 86 dB
- Frequency response: 55Hz-20KHz
- Includes grills wires and installation hardware

PLCH693 One Pair Super Slim 6" x 9" 3-Way Speaker Systems

- Slim 6" x 9" size fits OEM locations
- High Quality injection woofer cone
- Butyl rubber surround
- Concealment magnet
- 1.25" high temperature ASV voice coil
- 2-1/2" mylar cone midrange
- 1/2" PEI dome tweeter
- Power handling: 180 Watts RMS / 360 Watts MAX
- 25 oz magnet structure
- Impedance: 4 Ohm
- Sensitivity: 87 dB
- Frequency response: 45Hz-20KHz
- Includes grills wires and installation hardware

PLCH6K One Pair Super Slim 6.5" 2-Way Component Speaker

- One Pair 6.5" Mid Bass Speaker:
- Slim 6.5" size fits OEM locations
- High Quality injection woofer cone
- Butyl rubber surround
- 20 oz magnet structure
- Concealment magnet
- 1." high temperature ASV voice coil
- Power handling: 110 Watts RMS / 220 Watts MAX
- Frequency response: 50Hz-20KHz
- Sensitivity: 86 dB One pair 1" silk dome tweeter:
- 1" silk dome diaphragm
- Neodymium magnet
- 3 mounting options: Flush / surface or angle mount
- 150 Watts RMS / 300 Watts peak
- Frequency response: 1.3-24KHz
- Impedance: 4 Ohm
- One pair passive crossover network:
- Two - way passive crossover
- 12 dB octave slope accessories
- Includes grills wires and installation hardware

PLG3.2 3.5" 120 Watt Two-Way Speakers

- Standard 3.5'' Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5'' Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 20 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 60 Watts RMS /120 Watts Peak
- Frequency Response: 100-20KHz
- Impedance: 4 Ohms
- Includes Wires and Installation Hardware

PLG4.2 4" 140 Watt Two-Way Speakers

- Standard 4'' Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5'' Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 20 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 90-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG46.2 4" x 6" 180 Watt Two-Way Speakers

- Standard 4''x6'' Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5'' Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 90 Watts RMS /180 Watts Peak
- Frequency Response: 70-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG46.3 4" x 6" 180 Watt Three-Way Speakers

- Standard 4''x6'' Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5'' Neodymium Dome Midrange
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 90 Watts RMS /180 Watts Peak
- Frequency Response: 70-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG5.2 5.25" 140 Watt Two-Way Speakers

- Standard 5.25'' Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5'' Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 80-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG5.3 5.25" 140 Watt Three-Way Speakers

- Standard 5.25'' Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5'' Neodymium Dome Midrange
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 80-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

Gear X Series Speakers

PLG57.2 5” x 7”/6” x 8” 240 Watt Two-Way Speakers

- Standard 5”x7”/6”x8” Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5” Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 120 Watts RMS /240 Watts Peak
- Frequency Response: 75-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG57.3 5” x 7”/6” x 8” 240 Watt Three-Way Speakers

- Standard 5”x7”/6”x8” Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5” Neodymium Dome Midrange
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 120 Watts RMS /240 Watts Peak
- Frequency Response: 75-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG6.2 6.5” 240 Watt Two-Way Speakers

- Standard 6.5” Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5” Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 120 Watts RMS /240 Watts Peak
- Frequency Response: 65-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG6.3 6.5” 280 Watt Three-Way Speakers

- Standard 6.5” Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5” Neodymium Dome Midrange
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 40 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 140 Watts RMS /280 Watts Peak
- Frequency Response: 60-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG6.4 6.5” 300 Watt Four-Way Speakers

- Standard 6.5” Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 1.75” Polymer Cone Midrange
- 0.5” Neodymium Dome Tweeter
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 40 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 150 Watts RMS /300 Watts Peak
- Frequency Response: 60-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hard ware

PLG41.3 4” x 10” 300 Watt Three-Way Speakers

- Standard 4”x10” Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2” Polymer Cone Midrange
- 0.5” Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 45 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 150 Watts RMS /300 Watts Peak
- Frequency Response: 60-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG68.3 6” x 8” 280 Watt Four-Way Speakers

- Standard 6”x8” Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 1.75” Polymer Cone Midrange
- 0.5” Neodymium Dome Tweeter
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 40 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 140 Watts RMS /280 Watts Peak
- Frequency Response: 65-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

Gear X Series Speakers

PLG69.3 6" x 9" 360 Watt Three-Way Speakers

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2.5" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 100 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 180 Watts RMS /360 Watts Peak
- Frequency Response: 45-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG69.4 6" x 9" 400 Watt Four-Way Speakers

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 100 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 200 Watts RMS /400 Watts Peak
- Frequency Response: 45-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG69.5 6" x 9" 450 Watt Five-Way Speakers

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- 2 x Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 120 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 225 Watts RMS /450 Watts Peak
- Frequency Response: 45-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG69.8 6" x 9" 500 Watt Eight-Way Speakers

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- 5 x Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 120 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 250 Watts RMS /500 Watts Peak
- Frequency Response: 45-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG71.4 7" x 10" 450 Watt Four-Way Speakers

- Standard 7"x10" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 120 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 225 Watts RMS /450 Watts Peak
- Frequency Response: 40-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG8.3 8" 400 Watt Three-Way Speakers

- Standard 8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2.5" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 120 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 200 Watts RMS /400 Watts Peak
- Frequency Response: 37-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware

PLG5C 5.25" 300 Watt Custom Component System

- One Pair 5.25" Mid Bass Speaker:
- Standard 5.25" Sizes Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- High Temperature Aluminum Voice Coil
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- 150 Watts RMS/ 300 Watts Peak
- Frequency Response: 60-6KHz
- Impedance: 4 Ohms
- One Pair 1" Neodymium Dome Tweeter:
- 1" Silk Dome Neodymium Magnet Tweeter
- 3 Mounting Options: Flush / Swivel / Surface/Angle
- 50 Watts RMS / 100 Watts Peak
- Frequency Response: 1.4-24KHz
- Impedance: 4 Ohms
- One Pair Passive Crossover Network:
- 2-Way passive Crossovers
- 12dB Octave SlopeAccessories:Custom Grills & Mounting HardwareWiring Kit, Wiring Diagram & Template

PLG6C 6.5" 400 Watt Custom Component System

- One Pair 6.5" Mid Bass Speaker:
- Standard 6.5" Sizes Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- High Temperature Aluminum Voice Coil
- Yellow Coated Steel Basket
- 40 oz. Magnet Structure
- Rubber Magnet Cover
- 200 Watts RMS/ 400 Watts Peak
- Frequency Response: 50-5KHz
- Impedance: 4 Ohms
- One Pair 1" Neodymium Dome Tweeter:
- 1" Silk Dome Neodymium Magnet Tweeter
- 3 Mounting Options: Flush / Swivel / Surface/Angle
- Frequency Response: 1.4-24KHz
- Impedance: 4 Ohms
- One Pair Passive Crossover Network:
- 2-Way passive Crossovers
- 12dB Octave Slope**Accessories:**
- Custom Grills & Mounting Hardware Wiring Kit, Wiring Diagram & Template

PLG54 5.25" 200 Watt High Performance Subwoofer

- Yellow CD P.P. Cone
- Specially Treated Rubber
- Edge Suspension
- 1.0" High Temperature
- Aluminum Voice Coil
- Magnet Weight: 30 Oz
- Impedance: 4 OHM
- 200 Watts Peak Power

PLG64 6.5" 300 Watt High Performance Subwoofer

- Yellow CD P.P. Cone
- Specially Treated Rubber
- Edge Suspension
- 1.0" High Temperature
- Aluminum Voice Coil
- Magnet Weight: 30 Oz
- Impedance: 4 OHM
- Rubber Magnet Boot Cover
- 300 Watts Peak Power

PLD64 Pair 6.5" 400 Watt Mid-Bass Drivers

- Custom Tooled Die-Cast Aluminum Basket
- Special Glass Fiber/Foam Composite Cone
- Non-Fatiguing Butyl Rubber Surround
- 1" High Temperature KAPTON Voice Coil
- Chrome Plated Back Plates
- Power Handling: 200 Watts RMS /400 Watts Peak
- Frequency Response: 55-6KHz
- Impedance: 4 Ohms
- Includes Grills, Wires and Installation Hardware

PLD6C 6.5" 400 Watt Custom Dryver Component System

- 6.5" Midrange Driver
- Aluminum Die Cast Basket
- Glass Fiber/Foam Composite Cone
- Butyl Rubber Surround
- Chrome Plated Back Plates
- 200 Watts RMS/ 400 Watts Peak
- Frequency Response: 55-6KHz
- Impedance: 4 OhmsOne Pair Tweeter:
- 1" Silk Dome Tweeter
- Neodymium Magnet
- Aluminum Housings
- 2 Mounting Options: Flush / Surface Mount
- Frequency Response: 1.4-24KHz
- Impedance: 4 OhmsOne Pair Passive Crossover Network:
- Two - Way Passive Crossovers
- 12dB Octave Slope
- Gold Plated Connectors
- Fully-Protected CircuitryAccessories:
- Custom Grills
- Mounting Hardware
- Wiring Kit and Wiring Diagram & Template

Plus Series Speakers

PLS40 4" 150 Watt Super Slim Two-Way Speakers

- Slim 4" Size Fits OEM Locations
- Poly-Mica Coated Woofer Cone
- Film Cone Midrange
- Concealment Magnet
- 1" High Temperature Voice Coil
- Neodymium Dome Tweeter
- Power Handling: 75 Watts RMS/150 Watts Max
- Impedance: 4 Ohm
- Frequency Response: 60-20 kHz
- Mounting Depth: 1.25"
- Grills Included

PLS50 5.25" 180 Watt Super Slim Two-Way Speakers

- Slim 5.25" Size Fits OEM Locations
- Poly-Mica Coated Woofer Cone
- Film Cone Midrange
- Concealment Magnet
- 1" High Temperature Voice Coil
- Neodymium Dome Tweeter
- Power Handling: 90 Watts RMS/180 Watts Max
- Impedance: 4 Ohm
- Frequency Response: 55-20 kHz
- Mounting Depth: 1.75"

PLS60 6.5" 280 Watt Super Slim Two-Way Speakers

- Slim 6.5" Size Fits OEM Locations
- Poly-Mica Coated Woofer Cone
- Concealment Magnet
- 1" High Temperature Voice Coil
- Neodymium Dome Tweeter
- Power Handling: 140 Watts RMS/280 Watts Max
- Impedance: 4 Ohm
- Frequency Response: 50-22 kHz
- Mounting Depth: 2.25"

PLS460 4" x 6" 180 Watt Super Slim Two-Way Speakers

- Slim 4" x 6" Size Fits OEM Locations
- Poly-Mica Coated Woofer Cone
- Film Cone Midrange
- Concealment Magnet
- 1" High Temperature Voice Coil
- Neodymium Dome Tweeter
- Power Handling: 90 Watts RMS/180 Watts Max
- Impedance: 4 Ohm
- Frequency Response: 66-22 kHz
- Mounting Depth: 1.5"

PLS410 4" x 10" 280 Watt Super Slim Three-Way Triaxial Speakers

- Slim 4" x 10" Size Fits OEM Locations
- Poly-Mica Coated Woofer Cone
- Film Cone Midrange
- Concealment Magnet
- 1" High Temperature Voice Coil
- Neodymium Dome Tweeter
- Power Handling: 140 Watts RMS/280 Watts Max
- Impedance: 4 Ohm
- Frequency Response: 55-22 kHz
- Mounting Depth: 1.75"

PLS690 6" x 9" 450 Watt Super Slim Three-Way Speakers

- Slim 6" x 9" Size Fits OEM Locations
- Poly-Mica Coated Woofer Cone
- Film Cone Midrange
- Concealment Magnet
- 1" High Temperature Voice Coil
- Neodymium Dome Tweeter
- Power Handling: 225 Watts RMS/450 Watts Max
- Impedance: 4 Ohm
- Frequency Response: 41-22 kHz
- Mounting Depth: 2.5"

PLST6 1/2" 150 Watt Tri-Mounting Neodymium Tweeter

- Mylar Dome
- High Density Neodymium Magnet
- Tri-Mounting System: Flush/Swivel/Surface
- Ferro Fluid Cooling
- 12Db Crossover Network
- Frequency Response: 1.3Khz-22khz
- Spl: 92db @ 1w/1m
- Power Handling: 150 Watts

PLST7 1" 150 Watt Mini Satellite Neodymium Tweeter Kit

- 1" Super Mini Dome Tweeter
- High Density Neodymium Magnet
- Flexible Omni-Directional Mounting Base
- Ferro Fluid Enhanced Voice Coil
- Power Handling: 150 Watts

Blue Wave Speakers

PLWT3 120 Watt Mini Surface Mount Tweeter

- Mylar dome
- High density neodymium magnet
- Surface and pivot mount system
- Integrated crossover system
- Frequency response: 2khz-24khz
- Spl: 100db @ 1w/1m
- Power handling: 120 watts

PLWT4 200 Watt High Performance Automotive Tweeter

- Extended High Frequency Piezo Driver
- Surface Mounting System
- Frequency Response: 3Khz-30Khz
- Sensitivity: 87Db @ 1W/1M
- 200 Watts Maximum Power Handling

PLBW42 One pair 4" two-way speaker systems

- Power handling: 80 Watts RMS. 160 Watts MAX
- Non-fatiguing butyl rubber surround
- 1" high temperature ASV voice coil
- Standard 4" size fits OEM locations
- Silver injection cone
- 10 oz magnet structure
- 1/2" PEI dome tweeter
- Impedance: 4 Ohm
- Sensitivity: 84 dB
- Frequency response: 90Hz-20KHz
- Complete with grill and mounting hardware

PLBW52 One pair 5.25" two-way speaker systems

- Power handling: 100 Watts RMS. 200 Watts MAX
- Non-fatiguing butyl rubber surround
- 1" high temperature ASV voice coil
- Standard 5.25" size fits OEM locations
- Silver injection cone
- 15 oz magnet structure
- 1/2" PEI dome tweeter
- Impedance: 4 Ohm
- Sensitivity: 86 dB
- Frequency response: 80Hz-20KHz
- Complete with grill and mounting hardware

PLBW62 One pair 6.5" two-way speaker systems

- Power handling: 150 Watts RMS. 300 Watts MAX
- Non-fatiguing butyl rubber surround
- 1" high temperature ASV voice coil
- Standard 6.5" size fits OEM locations
- Silver injection cone
- 20 oz magnet structure
- 1/2" PEI dome tweeter
- Impedance: 4 Ohm
- Sensitivity: 88 dB
- Frequency response: 70Hz-20KHz
- Complete with grill and mounting hardware

PLBW693 One pair 6" x 9" three-way speaker systems

- Power handling: 200 Watts RMS. 400 Watts MAX
- Non-fatiguing butyl rubber surround
- 1" high temperature ASV voice coil
- Standard 6"x9" size fits OEM locations
- Silver injection cone
- 30 oz magnet structure
- 2-1/2" PEI cone midrange
- 1/2" PEI dome tweeter
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- Frequency response: 55Hz-20KHz
- Complete with grill and mounting hardware

PLTWVS Sunvisor Mount-Type 6 Way 200 Watt Tune-up Tweeter

- Designed For Many Cars
- Height 14.5mm
- 60mm Piezo-type Midrange X 4
- 40mm Piezo –Type Tweeter X 2
- 200 Watts Max / 100 Watts RMS
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- Frequency Response: 2.5KHz - 20KHz

Pyle Driver Series Speakers

PLDV42 One Pair 4” Two-Way Coaxial Speaker Systems

- One Pair 4” Two-Way Coaxial Speaker Systems
- Power Handing: 100 Watts RMS. 200 Watts MAX
- Non-Fatiguing Butyl Rubber Surround
- 1” High Temperature ASV Voice Coil
- Standard 4” Size OEM Locations
- Poly Injection Cone
- 15 Oz Magnet Structure
- Rubber Magnet Cover
- 1/2” Neodymium Dome Tweeter
- Impedance: 4 Ohm
- Sensitivity: 88 dB
- Frequency Response: 100Hz – 20KHz
- Includes Grills, Wires and Mounting Hardware

NEW 2008

PLDV52 One Pair 5.25” Two-Way Coaxial Speaker Systems

- One Pair 5.25” Two-Way Coaxial Speaker Systems
- Power Handing: 110 Watts RMS. 220 Watts MAX
- Non-Fatiguing Butyl Rubber Surround
- 1” High Temperature ASV Voice Coil
- Standard 5.25” Size OEM Locations
- Poly Injection Cone
- 20 Oz Magnet Structure
- Rubber Magnet Cover
- 1/2” Neodymium Dome Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 dB
- Frequency Response: 90Hz – 20KHz
- Includes Grills, Wires and Mounting Hardware

NEW 2008

PLDV62 One Pair 6.5” Two-Way Coaxial Speaker Systems

- One Pair 6.5” Two-Way Coaxial Speaker Systems
- Power Handing: 120 Watts RMS. 240 Watts MAX
- Non-Fatiguing Butyl Rubber Surround
- 1” High Temperature ASV Voice Coil
- Standard 6.5” Size OEM Locations
- Poly Injection Cone
- 20 Oz Magnet Structure
- Rubber Magnet Cover
- 1/2” Neodymium Dome Tweeter
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- Frequency Response: 80Hz – 20KHz
- Includes Grills, Wires and Mounting Hardware

NEW 2008

PLDV693 One Pair 6” X 9” Three –Way Triaxial Speaker Systems

- One Pair 6” X 9” Three -Way Triaxial Speaker Systems
- Power Handing: 180 Watts RMS. 360 Watts MAX
- Non-Fatiguing Butyl Rubber Surround
- 1.25” High Temperature ASV Voice Coil
- Standard 6” X 9” Size OEM Locations
- Poly Injection Cone
- 40 Oz Magnet Structure
- Rubber Magnet Cover
- 2” Polymer Cone Midrange
- 1/2” Neodymium Dome Tweeter
- Impedance: 4 Ohm
- Sensitivity: 92 dB
- Frequency Response: 45Hz – 20KHz
- Includes Grills, Wires and Mounting Hardware

NEW 2008

PLDV6K 6.5” Two-Way Component Speaker System

- One Pair 6.5” Mid Bass Speaker:
- Standard 6.5” Size OEM Locations
- Poly Injection Cone
- Non-Fatiguing Butyl Rubber Surround
- 1” High Temperature ASV Voice Coil
- 25 Oz Magnet Structure
- Rubber Magnet Cover
- Power Handing: 120 Watts RMS. 240 Watts MAX
- Frequency Response: 50Hz – 20KHz
- Impedance: 4 Ohm One Pair Tweeter:
- 1” Silk Dome Tweeter
- 3 Mounting Options: Flush / Swivel / Surface and Angle Mount
- 50 Watts RMS / 100 Watts Peak
- Frequency Response: 1.4Hz – 24KHz
- Impedance: 4 Ohm One Pair Passive Crossover Network
- Two-Way Passive Crossover
- 12 dB Octave Slope Accessories:
- Includes Custom Grills
- Wires and Installation Hardware

NEW 2008

PLX32 3.5” 80 Watt Two-Way Speakers

- 3.5” Polypropylene woofer cone
- .75” Hi-Temp ferro fluid enhanced voice coil
- 1” Mylar dome tweeter
- 40 Watts rms/80 watts max power
- Frequency response: 65 - 20k hz
- 4 Ohms impedance
- Rubber boot magnet cover
- Complete mounting kits w/wires
- Mounting Depth: 1.25”

PLX42 4” 100 Watt Two-Way Speakers

- 4” Polypropylene woofer cone
- 1” Hi-Temp ferro fluid enhanced voice coil
- 1” Mylar dome tweeter
- 50 Watts rms/100 watts max power
- Frequency response: 65 - 20k hz
- 4 Ohms impedance
- Rubber boot magnet cover
- Complete mounting kits w/wires
- Mounting Depth: 1.875”

Wave Series Speakers

PLX462 4” x 6” 160 Watt Two-Way Speakers

- 4”X6” polypropylene woofer cone
- 1” Hi-Temp ferro fluid enhanced voice coil
- 1” Mylar dome tweeter
- 80 Watts rms/160 watts max power
- Frequency response: 50 - 20k hz
- 4 Ohms impedance
- Rubber boot magnet cover
- Complete mounting kits w/wires
- Mounting Depth: 1.75”

PLX52 5.25” 120 Watt Two-Way Speakers

- 5.25” Polypropylene woofer cone
- High density ferrite magnet
- 1” Hi-Temp ferro fluid enhanced voice coil
- 1” Mylar dome tweeter
- 60 Watts rms/120 watts max power
- Frequency response: 55 - 20k hz
- 4 Ohms impedance
- Rubber boot magnet cover
- Complete mounting kits w/wires
- Mounting Depth: 1.75”

PLX572 5” x 7”/6” x 8” 180 Watt Two-Way Speakers

- 5”X7” polypropylene woofer cone
- 1” Hi-Temp ferro fluid enhanced voice coil
- 1” Mylar dome tweeter
- 90 Watts rms/180 watts max power
- Frequency response: 50 - 20k hz
- 4 Ohms impedance
- Rubber boot magnet cover
- Complete mounting kits w/wires & grills
- Mounting Depth: 2.25”

PLX62 6.5” 150 Watt Two-Way Speakers

- 6.5” Polypropylene woofer cone
- 1” Hi-Temp ferro fluid enhanced voice coil
- 1” Mylar dome tweeter
- 75 Watts rms/150 watts max power
- Frequency response: 50 - 20k hz
- 4 Ohms impedance
- Rubber boot magnet cover
- Complete mounting kits w/wires & grills

PLX63 6.5” 180 Watt Three-Way Speakers

- 6.5” Polypropylene woofer cone
- 1” Hi-Temp ferro fluid enhanced voice coil
- 2” Pole mounted aluminum midrange
- 1” Mylar dome tweeter
- 90 Watts rms/180 watts max power
- Frequency response: 50 - 20k hz
- 4 Ohms impedance
- Rubber boot magnet cover
- Complete mounting kits w/wires & grills
- Mounting Depth: 2.25”

PLX693 6” x 9” 300 Watt Three-Way Speakers

- 6”X9” polypropylene woofer cone
- 1” Hi-Temp ferro fluid enhanced voice coil
- 2” Mylar dome midrange
- 1” Mylar dome tweeter
- 150 Watts rms/300 watts max power
- Frequency response: 60-20k Hz
- 4 Ohms impedance
- Rubber boot magnet cover
- Complete mounting kits w/wires & grills

PLX4102 4” x 10” 200 Watt Two-Way Speakers

- 4”X10” Polypropylene Woofer Cone
- 1” Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1” Mylar Dome Tweeter
- 100 Watts Rms/200 Watts Max Power
- Frequency Response: 50-20k Hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Complete Mounting Kits W/Wires & Grills
- Mounting Depth: 2.365”

PLW10BL 10” 600 Watt Blue Cone High Performance Subwoofer

- Blue CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped & Vented Extended Pole Piece
- 1.5” High Tempreture Kapton Voice Coil
- 4 Ohms Impedance
- 70 oz. Magnet Structure
- 600 Watts Peak Power
- Fs:35.9, Qms:5.72, Qes:0.83
- Qts:0.73,Vas (Cu ft)1.932
- SPL: 86.7dB
- Overall Diameter: 10.16”
- Mounting Depth: 4.72”

PLW12BL 12” 800 Watt Blue Cone High Performance Subwoofer

- Blue CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped & Vented Extended Pole Piece
- 2” High Tempreture Kapton Voice Coil
- 4 Ohms Impedance
- 90 oz. Magnet Structure
- 800 Watts Peak Power
- Fs:26.6, Qms:5.81, Qes:0.90
- Qts:0.78,Vas (Cu ft)4.146
- SPL: 85.5dB
- Overall Diameter: 12.20”
- Mounting Depth: 5.34”

PLW10RD 10” 600 Watt Red Cone High Performance Subwoofer

- Red CD Wave Electro-Plated Polypropylene Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped & Vented Extended Pole Piece
- 1.5” High Tempreture Kapton Voice Coil
- Fs:35.9, Qms:5.72, Qes:0.83, Qts:0.73, Vas (Cu ft)1.932
- 4 Ohms Impedance
- 70 oz. Magnet Structure
- 600 Watts Peak Power
- SPL: 86.7dB
- Overall Diameter: 10.16”
- Mounting Depth: 4.45”

PLW12RD 12” 800 Watt Red Cone High Performance Subwoofer

- Red CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped & Vented Extended Pole Piece
- 2” High Tempreture Kapton Voice Coil
- 4 Ohms Impedance
- 90 oz. Magnet Structure
- 800 Watts Peak Power
- Fs:26.6, Qms:5.81, Qes:0.90
- Qts:0.78,Vas (Cu ft)4.146
- SPL: 85.5dB
- Overall Diameter: 12.20”
- Mounting Depth: 5.34”

PLSQ10D 10” 1200 Watt Red Label Square Subwoofer

- Silver Special Treated Polyproplene Cone
- Wide Rubber Surround
- Black Square Steel Basket
- Bumped & Vanted Extended Pole Piece
- 2.5” High Tempeature Kapton Voice Coil
- 4 Ohm Impedance (Per Coil)
- 70 + 70 oz. Magnet Structure
- SPL: 88 dB
- 1200 Watts Peak Power
- Overall Diameter: 11.81”
- Mounting Depth: 5.91”

PLSQ12D 12” 1400 Watt Red Label Square Subwoofer

- Silver Special Treated Polyproplene Cone
- Wide Rubber Surround
- Black Square Steel Basket
- Bumped & Vanted Extended Pole Piece
- 3” High Tempeature Kapton Voice Coil
- 4 Ohm Impedance (Per Coil)
- 70 + 70 oz. Magnet Structure
- SPL: 90 dB
- 1400 Watts Peak Power
- Overall Diameter: 13”
- Mounting Depth: 6.34”

PL1595BL 15” 1400 Watt High Power Die-Cast Subwoofer

- Blue Injection Molded Cone
- Specially Treated Rubber Edge Suspension
- Die-Cast Basket
- Bumped & Vented Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5” High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x90 oz
- 1400 Watt Max Power Handling
- Impedance: 4 Ohm
- SPL: 85dB
- Overall Diameter: 15.20”
- Mounting Depth: 8”

PL1295BL 12” 1200 Watt High Power Die-Cast Subwoofer

- Blue Injection Molded Cone
- Specially Treated Rubber Edge Suspension
- Die-Cast Basket
- Bumped & Vented Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5” High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x50 oz
- 1200 Watt Max Power Handling
- Impedance: 4 Ohm
- SPL: 85dB
- Overall Diameter: 12.20”
- Mounting Depth: 6.52”

Woofers

PL1090BL 10” 1000 Watt High Power Subwoofer

- Blue Injection Molded Cone
- Specially Treated Rubber Edge Suspension
- Chrome Steel Basket
- Bumped & Vented Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2” High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x70 oz
- 1000 Watt Max Power Handling
- Impedance: 4 Ohm
- SPL: 83.5dB
- Overall Diameter: 10.16”
- Mounting Depth: 6.20”

PL1290BL 12” 1200 Watt Molded Blue Cone High Power Subwoofer

- Blue Injection Molded Cone
- Specially Treated Rubber Edge Suspension
- Chrome Steel Basket
- Bumped & Vented Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5” High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x90 oz
- 1200 Watt Max Power Handling
- Impedance: 4 Ohm
- SPL: 85dB
- Overall Diameter: 12.20”
- Mounting Depth: 6.52”

PL1590BL 15” 1400 Watt Molded Blue Cone High Power Subwoofer

- Blue Injection Molded Cone
- Specially Treated Rubber Edge Suspension
- Chrome Steel Basket
- Bumped & Vented Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5” High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x90 oz
- 1400 Watt Max Power Handling
- Impedance: 4 Ohm
- SPL: 85dB
- Overall Diameter: 15.20”
- Mounting Depth: 8”

PL1890BL 18” 1800 Watt DVC High Power Subwoofer

- Blue Injection Molded Cone
- Specially Treated Rubber Edge Suspension
- Chrome Steel Basket - Bumped & Vented Pole Piece
- 3.0” High Temperature
- Silver Plated Terminal
- Flat Progressive Spider
- Rubber Magnet Boot
- New Wave-Like Rubber Gasket
- Dual Voice Coil
- Magnet Weight: 100 + 100 Oz
- 1800 Watts Max Power Handling
- Impedance: 4 OHM

PLBW84 8” 800 Watt High Power Subwoofer

- Blue CD P.P. Cone
- Specially Treated Rubber
- Edge Suspension
- 1.5” High Temperature
- Dual Voice Coil
- Magnet Weight: 60 Oz
- 800 Watts Max Power Handling
- Impedance: 4 OHM

PLBW104 10” 1000 Watt High Power Subwoofer

- Blue CD P.P. Cone
- Specially Treated Rubber
- Edge Suspension
- 2.0” High Temperature
- Dual Voice Coil
- Magnet Weight: 70 Oz
- 1000 Watts Max Power Handling
- Impedance: 4 OHM

PLBW124 12” 1200 Watt High Power Subwoofer

- Blue CD P.P. Cone
- Specially Treated Rubber
- Edge Suspension
- 2.0” High Temperature
- Dual Voice Coil
- Magnet Weight: 70 Oz
- 1200 Watts Max Power Handling
- Impedance: 4 OHM

PLBW154 15” 1500 Watt High Power Subwoofer

- Blue CD P.P. Cone
- Specially Treated Rubber
- Edge Suspension
- 2.5” High Temperature
- Dual Voice Coil
- Magnet Weight: 80 Oz
- 1500 Watts Max Power Handling
- Impedance: 4 OHM

PLW12DREN 12” 2000 Watt Red Aluminum Cone Die-Cast Subwoofer

- Red Aluminum Cone
- Heavy Duty High Power Handling Driver
- Wide Butyl Rubber Surround
- Aluminum Die-Cast Basket
- Ultra Sleek and Modern Design
- Dual Stacked Magnet Structure
- Chrome Mesh Magnet Vent
- 2.5” 4 Layer Dual Voice Coil
- Allen Key Connection Terminals
- Red Powder coat insets on Die-Cast Frame
- 2000 Watts Peak Power
- Magnet Weight: 2 x 40 oz.
- Nominal Impedance: Dual 4 Ohms
- Qms: 5.205
- Qes: 0.601
- Qts: 0.539
- X-Max (in): 0.4
- SPL: 85dB

PLCHW10 10” 1400 Watt Chopper Series Titanium Injected High Performance Subwoofer

- Titanium Injected Polypropylene Cone
- Wide Rubber Surround
- Chrome Stamped Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2” High Temperature Dual Kapton Voice Coil
- Impedance: Dual 4 Ohm
- 50 + 50 oz. Magnet Structure
- SPL: 88 dB
- 1400 Watts Peak Power

PLCHW12 12” 2400 Watt Chopper Series Titanium Injected High Performance Subwoofer

- Titanium Injected Polypropylene Cone
- Wide Rubber Surround
- Chrome Stamped Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2” High Temperature Dual Kapton Voice Coil
- Impedance: Dual 4 Ohm
- 60 + 60 oz. Magnet Structure
- SPL: 88 dB
- 2400 Watts Peak Power

PLCHW15 15” 3600 Watt Chopper Series Titanium Injected High Performance Subwoofer

- Titanium Injected Polypropylene Cone
- Wide Rubber Surround
- Chrome Stamped Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2.5” High Temperature Kapton Voice Coil
- Impedance: Dual 4 Ohm
- 70 + 70 oz. Magnet Structure
- SPL: 88 dB
- 3600 Watts Peak Power

PLD12WD 12” 3200 Watt Aluminum Die-Cast Dryver Subwoofer

- Custom Moulded Poly Cone
- Heavy Duty High Power Handling Driver
- Custom Grooved Rubber Surround
- Diamond Cut Aluminum Die-Cast Basket
- Dual Stacked Magnet Structure
- Chrome Mesh Magnet Vent
- 2.5” 4 Layer Dual Voice Coil
- Moulded Plastic Gasket
- Spring Loaded Wire Connectors
- 3200 Watts Peak Power
- Magnet Weight: 2 x 100 oz.
- Nominal Impedance: Dual 4 Ohms

PLD15WD 15” 4000 Watt Aluminum Die-Cast Dryver Subwoofer

- Custom Moulded Poly Cone
- Heavy Duty High Power Handling Driver
- Custom Grooved Rubber Surround
- Diamond Cut Aluminum Die-Cast Basket
- Dual Stacked Magnet Structure
- Chrome Mesh Magnet Vent
- 3” 4 Layer Dual Voice Coil
- Moulded Plastic Gasket
- Spring Loaded Wire Connectors
- 4000 Watts Peak Power
- Magnet Weight: 2 x 100 oz.
- Nominal Impedance: Dual 4 Ohms

PLWCH10D Slim 10” 1000 High Quality Subwoofer

- 10” High Quality Poly Mica Cone
- Butyl Foam Surround
- Dual 2” High Temperature Kapton Voice Coil
- 60 Oz Magnet Structure
- Power Handling: 500Watts RMS/1000 Watts Peak
- Frequency Response: 30 Hz - 2.2K Hz
- Impedance (Per coil) : 4 Ohm
- Efficiency: 91 dB
- Includes Installation Template

PLWCH12D Slim 12” 1200 High Quality Subwoofer

- 12” High Quality Poly Mica Cone
- Butyl Foam Surround
- Dual 2.5” High Temperature Kapton Voice Coil
- 75 Oz Magnet Structure
- Power Handling: 600Watts RMS/1200 Watts Peak
- Frequency Response: 28 Hz - 2.2K Hz
- Impedance (Per coil) : 4 Ohm
- Efficiency: 91 dB
- Includes Installation Template

Woofers

PLWB105 10” 600 Watt Chrome Subwoofer

- Non-Pressed Paper Cone
- Specially Treated Foam Edge Suspension
- 2” High Temperature Voice Coil
- Magnet Weight: 60oz
- 600 Watts Max Power Handling
- 4 Ohms Impedance
- Chrome Stamped Basket
- Custom embossed Chrome Magnet Cover
- Chrome Gasket
- Allen Key Terminal Connections

PLWB10D 10” 600 Watt Dual Voice Coil Chrome Subwoofer

- Non-Pressed Paper Cone
- Specially Treated Foam Edge Suspension
- 2” High Temperature Dual Voice Coil
- Magnet Weight: 60oz
- 600 Watts Max Power Handling
- 4 Ohms Impedance
- Chrome Stamped Basket
- Custom Embossed Chrome Magnet Cover
- Chrome Gasket
- Allen Key Terminal Connections

PLWB108 10” 8 Ohm 800 Watt Blue Cone Subwoofer

- Heavy Duty Stamped Steel Basket
- Bumped & Vented Extended Pole Piece
- 2” Kapton Voice Coil
- Flat Progressive Spider
- Big Rubber Surround
- Semi Pressed Paper Cone
- 80 Oz.Magnet
- 8 Ohms
- 400 Watts Rms Power
- 800 Watts Peak Power

PLWB125 12” 800 Watt Chrome Subwoofer

- Non-Pressed Paper Cone
- Specially Treated Foam Edge Suspension
- 2” High Temperature Voice Coil
- Magnet Weight: 80oz
- 800 Watts Max Power Handling
- 4 Ohms Impedance
- Chrome Stamped Basket
- Custom Embossed Chrome Magnet Cover
- Chrome Gasket
- Allen Key Terminal Connections

PLWB12D 12” 800 Watt Dual Voice Coil Chrome Subwoofer

- Non-Pressed Paper Cone
- Specially Treated Foam Edge Suspension
- 2” High Temperature Dual Voice Coil
- Magnet Weight: 80oz
- 800 Watts Max Power Handling
- 4 Ohms Impedance
- Chrome Stamped Basket
- Custom Embossed Chrome Magnet Cover
- Chrome Gasket
- Allen Key Terminal Connections

PLWB128 12” 8 Ohm 1000 Watt Blue Cone Subwoofer

- Heavy Duty Stamped Steel Basket
- Bumped & Vented Extended Pole Piece
- 2” Kapton Voice Coil Flat Progressive Spider
- Big Rubber Surround
- Non Pressed Black Paper Cone
- 80 Oz.Magnet
- 8 Ohms
- 400 Watts Rms Power
- 800 Watts Peak Power

PLWB155 15” 1000 Watt Chrome Subwoofer

- Non-Pressed Paper Cone
- Specially Treated Foam Edge Suspension
- 2.5” High Temperature Voice Coil
- Magnet Weight: 100oz
- 1000 Watts Max Power Handling
- 4 Ohms Impedance
- Chrome Stamped Basket
- Custom Embossed Chrome Magnet Cover
- Chrome Gasket
- Allen Key Terminal Connections

PLWB15D 15” 1000 Watt Dual Voice Coil Chrome Subwoofer

- Non-Pressed Paper Cone
- Specially Treated Foam Edge Suspension
- 2.5” High Temperature Dual Voice Coil
- Magnet Weight: 100oz
- 1000 Watts Max Power Handling
- 4 Ohms Impedance
- Chrome Stamped Basket
- Custom Embossed Chrome Magnet Cover
- Chrome Gasket
- Allen Key Terminal Connections

PLWB158 15” 1000 Watt 8 Ohm Chrome Subwoofer

- Non-Pressed Paper Cone
- Specially Treated Foam Edge Suspension
- 2.5” High Temperature Voice Coil
- Magnet Weight: 100oz
- 1000 Watts Max Power Handling
- 8 Ohms Impedance
- Chrome Stamped Basket
- Custom Embossed Chrome Magnet Cover
- Chrome Gasket
- Allen Key Terminal Connections

PLTA8N 8” 400 Watt Amplified Subwoofer Tube System

- One 8’’ High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 1.5” Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 400 Watts Max Power Handling
- RCA/Speaker Line Input
- Frequency Response: 30Hz-700k Hz
- Dimensions: 19.69’’ x 9.45’’ x 10.24’’
- Weight: 15.88 lb

PLTA10N 10” 500 Watt Amplified Subwoofer Tube System

- One 10’’ High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2’’ Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 500 Watts Max Power Handling
- RCA/Speaker Line Input
- Frequency Response: 30Hz-700kHz
- Dimensions: 21.07’’ x 11.42’’ x 12.6’’
- Weight: 23.81 lb

PLTA12N 12” 600 Watt Amplified Subwoofer Tube System

- One 12’’ High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2’’ Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 600 Watts Max Power Handling
- Frequency Response: 25Hz-600k Hz
- Dimensions: 22.45’’ x 13.59’’ x 15.16’’
- Weight: 29.11 lb

PLTAB8 8” 250 Watt Amplified Subwoofer Tube System

- One 8’’ High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 1.5” Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 250 Watts Max Power Handling
- RCA/Speaker Line Input
- Frequency Response: 30Hz-700k Hz
- Dimensions: 9.85’’ x 9.85’’ x 20.08’’
- Weight: 15 lb

PLTAB10 10” 500 Watt Amplified Subwoofer Tube System

- One 10’’ High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2’’ Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 500 Watts Max Power Handling
- RCA/Speaker Line Input
- Frequency Response: 30Hz-700k Hz
- Dimensions: 11.82’’ x 11.82’’ x 20.08’’
- Weight: 19.85 lb

PLTAB12 12” 800 Watt Amplified Subwoofer Tube System

- One 12’’ High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2’’ Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 800 Watts Max Power Handling
- Frequency Response: 25Hz-600k Hz
- Dimensions: 13.98’’ x 13.98’’ x 20.08’’
- Weight: 26.46 lb

PLTB10 10” 500 Watt Carpeted Subwoofer Tube System

- One 10’’ High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2’’ Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 500 Watts Max Power Handling
- Frequency Response: 30Hz-700k Hz
- Dimensions: 13.6’’ Diam. x 19.5’’ Length

PLTB12 12” 600 Watt Carpeted Subwoofer Tube System

- One 12’’ High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2’’ Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 600 Watts Max Power Handling
- Frequency Response: 25Hz-600k Hz
- Dimensions: 16.8’’ Diam. x 19.5’’ Length

PLTB8 8” 400 Watt Carpeted Subwoofer Tube System

- One 8’’ High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 1.5” Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 400 Watts Max Power Handling
- Frequency Response: 30Hz-700k Hz
- Dimensions: 11.5’’ Diam. x 19.5’’ Length

PLTB8P 8” 400 Watt Passive Subwoofer Nitrous Tank Look Tube

- One 8” High Power 4 Ohm Subwoofer
- High Quality Poly Mica Cone
- Non-Fatiguing Butyl Rubber Surround
- 2” High Temperature Aluminum Voice Coil
- Bass Reflex Vented for Added Sub-Bass Response
- High Quality Plastic Construction
- Dimensions: 10’’ Diameter x 26’’ Length
- 60 oz. Magnet Structure
- Power Handling: 200 Watts RMS /400 Watts Peak
- Frequency Response: 45-2KHz
- Impedance: 4 OhmsIncludes Plastic Mounting Bracket, Wires and Installation Hardware

Bass Enclosures

PLBN102 Dual 10" 2 Way 1000 Watt Bandpass System w/Blue Woofer Rings

- Two 10" High Power 4 Ohm Subwoofers
- Silver Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2" Aluminum Voice Coil
- Bandpass Alignment for Extra Deep Bass
- Plexi Glass Front Window
- Blue LED Woofer Rings
- 4 Tuned Ports
- 1000 Watts Max Power Handling
- Dimensions: 30"W x 13.6"H x 14.8"D

PLBN122 Dual 12" 1200 Watt 2 Way Bandpass System w/LED Woofer Rings

- Two 12" High Power 4 Ohm Subwoofers
- Silver Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2" Aluminum Voice Coil
- Bandpass Alignment for Extra Deep Bass
- Plexi Glass Front Window
- Blue LED Woofer Rings
- 4 Tuned Ports
- 1200 Watts Max Power Handling
- Dimensions: 31.8"W x 15.6"H x 16.8"D

PLBWS110 10" 500 Watt Bandpass System w/Neon Woofer Silhouette

- One 10" High Power 4 Ohm Subwoofer
- Silver Polypropylene Cone
- 2"Aluminum Voice Coil
- Specially Treated Black Rubber Edge Suspension
- Blue Neon Light
- Banpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 2 Tuned Ports
- 500 Watts Max Power Handling
- Frequency Response: 35Hz-1k Hz
- Dimensions: 13"H x 14"W x 14"D

PLBWS112 12" 600 Watt Bandpass System w/Neon Woofer Silhouette

- One 12" High Power 4 Ohm Subwoofer
- Silver Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- Blue Neon Light
- 2" Aluminum Voice Coil
- Banpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 2 Tuned Ports
- 600 Watts Max Power Handling
- Frequency Response: 35Hz-1k Hz
- Dimensions: 15.5"H x 16"W x 15.5"D

PLBWS210 Dual 10" 1000 Watt Bandpass System w/Neon Woofer Silhouette

- Two 10" High Power 4 Ohm Subwoofers
- Blue Neon Silhouette Woofer Rings
- Silver Polypropylene Cones
- Specially Treated Rubber Egde Suspension
- 2"Aluminum Voice Coil
- Bandpass Alignment for Extra Deep Bass
- Quick Connect Input Terminals
- Plexiglass Front Window
- 1000 Watts Max Power Handling
- 2 Tuned Ports
- Frequency Response: 35Hz-1k Hz
- Dimensions: 13"H x 25.5"W x 14"D

PLBWS212 Dual 12" 1200 Watt Bandpass System w/Neon Woofer Silhouette

- Two 12" High Power 4 Ohm Subwoofers
- Blue Neon Silhouette Woofer Rings
- Silver Polypropylene Cones
- Specially Treated Rubber Egde Suspension
- 2"Aluminum Voice Coil
- Bandpass Alignment for Extra Deep Bass
- Quick Connect Input Terminals
- Plexiglass Front Window
- 1200 Watts Max Power Handling
- 4 Tuned Ports
- Frequency Response: 35Hz-1k Hz
- Dimensions: 15.5"H x 29.5"W x 15.5"D

PLQB10 10" 500 Watt Bandpass System

- One 10" High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2" Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 500 Watts Max Power Handling
- Frequency Response: 30Hz-700k Hz
- Dimensions: 12"H x 12"W x 17"D

PLQB12 12" 600 Watt Bandpass System

- One 12" High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2" Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 600 Watts Max Power Handling
- Frequency Response: 25Hz-600k Hz
- Dimensions: 14"H x 14"W x 17"D

PLQB8 8" 400 Watt Bandpass System

- One 8" High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2" Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 400 Watts Max Power Handling
- Frequency Response: 35Hz-800k Hz
- Dimensions: 10"H x 10"W x 17"D

PLNBP212 Dual 12” 1200 Watt Full Plexi-Enclosure Bandpass System w/Neon Silhouettes

- Full Transparent Blue Bandpass Box
- Clear Plexi Design Shows Interior Components
- Two 12” High Power 4 Ohm Subwoofers
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2” High Temperature Aluminum Voice Coil
- Bandpass Alignment for Extra Deep Bass
- 4 Tuned Ports
- 1200 Watts Max Power Handling
- Blue Neon Silhouette Woofer Rings
- Four Port Holes for Bass Response
- Quick Connect Input Terminals
- Dimensions: 15.5” x 30” x 15.5”

PLBS10 10” 500 Watt Bandpass System

- One 10” High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2” Aluminum Voice Coil
- Rear Vented Design
- 500 Watts Max Power Handling
- Dimensions: 13.6”W x 12.2”H x 12.8”D

PLBS12 12” 600 Watt Bandpass System

- One 12” High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2” Aluminum Voice Coil
- Rear Vented Design
- 600 Watts Max Power Handling
- Dimensions: 15.6”W x 14.2”H x 14”D

PLBS102 Dual 10” 600 Watt Bandpass System

- Two 10” High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2” Aluminum Voice Coil
- Rear Vented Design
- LED Light Diodes
- 600 Watts Max Power Handling
- Dimensions: 26”W x 12.2”H x 12.8”D

PLBS122 Dual 12” 800 Watt Bandpass System

- Two 12” High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2” Aluminum Voice Coil
- Rear Vented Design
- LED Light Diodes
- 800 Watts Max Power Handling
- Dimensions: 30”W x 14.2”H x 14”D

PLHB8 8” 600 Watt Dual Hatch Back Woofer System

- Two 8” High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2” Aluminum Voice Coil
- Two 2” x 5” Piezo Tweeter
- Rear Vented Design
- Two Handles for Easy Portability
- 600 Watts Max Power Handling
- Frequency Response: 35Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 12.25”H x 28.25”W x 12.25”D

PLHB10 10” 800 Watt Dual Hatch Back Woofer System

- Two 10” High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2” Aluminum Voice Coil
- Two 2” x 5” Piezo Tweeter
- Rear Vented Design
- Two Handles for Easy Portability
- 800 Watts Max Power Handling
- Frequency Response: 25Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 14.5”H x 32”W x 14.5”D

PLHB12 12” 1000 Watt Dual Hatch Back Woofer System

- Two 12” High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2” Aluminum Voice Coil
- Two 2” x 5” Piezo Tweeter
- Rear Vented Design
- Two Handles for Easy Portability
- 1000 Watts Max Power Handling
- Frequency Response: 25Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 16.5”H x 36”W x 16.5”D

PLTR12 12” 1000 Watt Subwoofer Spare-Wheel Well Enclosure

- One 12” High Power 4 Ohm Subwoofer
- Enclosure Simulates Spare Wheel/Tire
- Designed to Fit Seamlessly into Spare Wheel Well
- Composite Molded Poly Cone
- Rugged Rubber Surround
- High Quality Construction
- Perfect for Custom Discrete Installations

PLTR15 15” 1200 Watt Subwoofer Spare-Wheel Well Enclosure

- One 15” High Power 4 Ohm Subwoofer
- Enclosure Simulates Spare Wheel/Tire
- Designed to Fit Seamlessly into Spare Wheel Well
- Composite Molded Poly Cone
- Rugged Rubber Surround
- High Quality Construction
- Perfect for Custom Discrete Installations

Capacitors

PLCAP3.2 3.2 Farad Dual Link Chopper Capacitor

- 3.2 Farad Neon Light Digital Display Power Capacitor
- Digital Voltage Readout
- Blue Neon Accent Lighting
- DC 12- 24 volt
- Electronic Polarity Protection Circuit
- Over Voltage Protection Circuit
- Clear Lucite Mounting Brackets

PLCAP4.1 4.1 Farad Dual Link Chopper Capacitor

- 4.1 Farad Neon Light Digital Display Power Capacitor
- Digital Voltage Readout
- Blue Neon Accent Lighting
- DC 12- 24 volt
- Electronic Polarity Protection Circuit
- Over Voltage Protection Circuit
- Clear Lucite Mounting Brackets

PLCAP5.2 5.2 Farad Triple Link Chopper Capacitor

- 5.2 Farad Neon Light Digital Display Power Capacitor
- Digital Voltage Readout
- Blue Neon Accent Lighting
- DC 12- 24 volt
- Electronic Polarity Protection Circuit
- Over Voltage Protection Circuit
- Clear Lucite Mounting Brackets

PLCAP8.6 8.6 Farad Quad Link Chopper Capacitor

- 8.6 Farad Neon Light Digital Display Power Capacitor
- Digital Voltage Readout
- Blue Neon Accent Lighting
- DC 12- 24 volt
- Electronic Polarity Protection Circuit
- Over Voltage Protection Circuit
- Clear Lucite Mounting Brackets

PLCAP300HB 30 Farad Digital Hybrid Power Capacitor

- 30 Farad 24 Volt Amplifier Style Hybrid Capacitor
- 4 Digital Blue Display
- 2 Pcs Blue LED Diodes
- 2 Pcs 4 AWG Chrome Ring Terminals
- Neon Glowing Light Bars
- Custom Stainless Steel Cap
- Comes in Aluminum Carrying Case
- Dimensions: 6.13"W x 4.75"L x 3.13"H

PLCAP800HB 80 Farad Digital Hybrid Power Capacitor

- 80 Farad 24 Volt Amplifier Style Hybrid Capacitor
- 4 Digital Blue Display
- 2 Pcs Blue LED Diodes
- 2 Pcs 4 AWG Chrome Ring Terminals
- Neon Glowing Light Bars
- Custom Stainless Steel Cap
- Comes in Aluminum Carrying Case
- Dimensions: 6.13"W x 4.75"L x 3.63"H

PLCPBT25 25 FARAD/22AH Car Battery Style Capacitor

- Compact Design for Optimal Storage Possibilities
- Works with all Car 12V Installations
- Extremely Fast Recharge Rate
- Low E.S.R.
- Auto On/Off Switch Control
- Electronic Polarity Protection
- Wide Temperature Endurance: -40¦ ~ 95¦
- 25 FARAD/22AH

PLCPBT50 50 FARAD/22AH Car Battery Style Capacitor

- Compact Design for Optimal Storage Possibilities
- Works with all Car 12V Installations
- Extremely Fast Recharge Rate
- Low E.S.R.
- Auto On/Off Switch Control
- Electronic Polarity Protection
- Wide Temperature Endurance: -40¦ ~ 95¦
- 50 FARAD/22AH

PLCPBT6 6 FARAD/22AH Car Battery Style Capacitor

- Compact Design for Optimal Storage Possibilities
- Works with all Car 12V Installations
- Extremely Fast Recharge Rate
- Low E.S.R.
- Auto On/Off Switch Control
- Electronic Polarity Protection
- Wide Temperature Endurance: -40¦ ~ 95¦
- 6 FARAD/22AH

Installation Kits

PLCAPE12 1.2 Farad Digital Power Capacitor

- Capacitance +- 5%. 20-24 Volt Surge, 105C
- Diameter 3" x 8.66"H
- Red Digital Display
- Strong Finishing For A Better Installation Result
- 1 Pair Clear Brackets Included
- Chrome Plated Post Kits

PLCAPE24 2.4 Farad Digital Power Capacitor

- Capacitance +- 5%. 20-24 Volt Surge, 105C
- Diameter 3.5" x 8.66"H
- Red Digital Display
- Strong Finishing For A Better Installation Result
- 1 Pair Clear Brackets Included
- Chrome Plated Post Kits

PLDCP1.2 1.7 Farad Digital Power Capacitor

- Capacitance +/- 5%, 20-24 Volt Surge, 105 C
- Lowest E.S.R. (-'5f0.0016 Ohm)
- Chrome Plated Post Kits
- Aluminum Brush
- Digital Red Display
- Red LED
- 1 Pair of Clear Brackets Included

PLDCP1.2KIT 1.7 Farad Digital Power Capacitor Kit

- Capacitance +/- 5%, 20-24 Volt Surge, 105 C
- Lowest E.S.R. (-'5f0.0016 Ohm)
- Aluminum Brush
- Chrome Plated Post Kits
- Digital Red Display
- Red LED
- 4 ft. 4 Gauge Power (Clear Platinum)/Grounding (Blue Platinum) Power Wire
- Satin Chrome POS-NEG Power Distribution Block
- Blister Packing

PLAM14 20ft 8 Gauge Amplifier Installation Kit

- 20ft. 8 Gauge Red Power Wire
- 4ft. 8 Gauge Black ground Wire
- 20ft. 16 Gauge Blue Remote Turn-On
- 20ft. 12 Gauge Speaker Wire
- 20ft. RCA Audio Cable
- 6ft. Black Split loom Cable Conduit
- AGU Type 60A Gold Plated Fuse
- Water Resistant In-line Fuse Holder
- 2 Ring Terminals: 8G
- 2 Spade Terminals: 8G
- 5 Spade Terminals: 14-16G
- 3 Butt Connectors 20 Cable Ties
- 1 Black Grommet

PLAM40 20ft 4 Gauge Amplifier Installation Kit

- 20ft. 4 Gauge Red Power Wire
- 4ft. 4 Gauge Black ground Wire
- 20ft. 16 Gauge Blue Remote Turn-On
- 20ft. 12 Gauge Speaker Wire
- 20ft. RCA Audio Cable
- 6ft. Black Split loom Cable Conduit
- AGU Type 60A Gold Plated Fuse
- Water Resistant In-line Fuse Holder
- 2 Ring Terminals: 4G
- 2 Spade Terminals: 4G
- 5 Spade Terminals: 16-18G
- 3 Butt Connectors 20 Cable Ties
- 1 Black Grommet

PLAM20 4 Gauge Amplifier Installation Kit

- 21ft. 4 Gauge Red Power Cable
- 4ft. 4 AWG Clear Black ground Cable
- In-Line AGU Fuse Holder, 80 Amp AGU Fuse Included
- 20ft. Clear Green Twisted Pair RCA Interconnect Cable
- 20ft. 16 AWG Clear Speaker Cable
- 17ft. Blue Remote Cable
- 6ft. Split loom Cable Conduit
- Power Distribution Block, Gold
- Water Resistant In-line Fuse Holder
- 4 AGW Ring Terminal, 2 pcs
- 4 AGW Spade Terminal, 2 pcs
- 2- 4 AGW Ring Terminals
- 16-14 AGW Spade Terminals 4 pcs
- 10- Cable Ties, 7"

Installation Accessories

PLRC3 3ft RCA Audio Cable

- 3' Dual RCA Spiral Braid Cable
- OFHC (Oxygen Free Hyper Conductor)
- Golg Contact RCA Connectors

PLRC6 6ft RCA Audio Cable

- 6' Dual RCA Spiral Braid Cable
- OFHC (Oxygen Free Hyper Conductor)
- Golg Contact RCA Connectors

PLRC12 12ft RCA Audio Cable

- 12' Dual RCA Spiral Braid Cable
- OFHC (Oxygen Free Hyper Conductor)
- Golg Contact RCA Connectors

PLRC18 18ft RCA Audio Cable

- 18' Dual RCA Spiral Braid Cable
- OFHC (Oxygen Free Hyper Conductor)
- Golg Contact RCA Connectors

PLRC22 22ft RCA Audio Cable

- 22' Dual RCA Spiral Braid Cable
- OFHC (Oxygen Free Hyper Conductor)
- Golg Contact RCA Connectors

PLRC2F RCA "Y" Connector

- 2 Female & 1 Male RCA Adaptor
- Spiral Shielded Wire OFV Copper Conductor
- Gold Plated RCA Connector
- 6'' Length

PLRC2M RCA "Y" Connector

- 2 Male & 1 Female RCA Adaptor
- Spiral Shielded Wire OFV Copper Conductor
- Gold Plated RCA Connector
- 6'' Length

PLRCA8 8ft High Quality Double Shielding RCA Audio Cable

- 8 Feet
- 100% Foil Plus An Outer Braid Shield
- Bright Colored RCA Plugs
- Low Noise
- Transparent Red Jacket

PLRCA20 20ft High Quality Double Shielding RCA Audio Cable

- 20 Feet
- 100% Foil Plus An Outer Braid Shield
- Bright Colored RCA Plugs
- Low Noise
- Transparent Red Jacket

PLVHL60 2 Channel Hi/Low Level Converter

- 2 Channel Hi/Low Level Converter
- Level Adjustable
- Ground Loop Isolation and Noise Elimination
- Aluminum Housing
- Max Input: 50W
- Dimensions: 3.6''L x 2.6''W x 1.08''H

Installation Accessories

PLDFU2 Waterproof Fuse Holder

- Satin Nickel Plating
- Waterproof Design
- 1 in (4 Gauge)
- 2 out (8 Gauge)
- (2) 30 Amp Fuses

PLDFU3 Waterproof Fuse Holder

- Satin Nickel Plating
- Waterproof Design
- 3 in (4 Gauge)
- 3 out (8 Gauge)
- (3) 30 Amp Fuses

PLDFU4 Waterproof Fuse Holder

- Satin Nickel Plating
- Waterproof Design
- 3 in (4 Gauge)
- 4 out (8 Gauge)
- (4) 30 Amp Fuses

PLDS AGU Fuse Holder

- 24K Gold Plated
- 1 In/1 Out Configuration
- 4/8/10 Gauge Compatible
- 30 Amp AGU Fuse Included

PLDS1 Battery Terminal

- Slip-in Top Cover
- (2) 8 Gauge Out
- (1) 4 Gauge Out
- Allen Screw Connection

PLDS10 In-Line Circuit Breaker

- In-line Style Circuit Breaker
- 1 in (4 Gauge)
- 1 out (8 Gauge)
- Allen Screw Terminals
- 60 Amp Power Surge

PLDS20 Circuit Breaker Distribution Block

- Power Distribution Block
- Built In Circuit Breaker
- 3 In (4 Gauge)
- 2 Out (8Gauge)
- Allen Screw Treminals
- 40 Amp Power Surge

PLDS3 Power Distribution Block

- Slip-on Top Cover
- 1 in (4 Gauge)
- 2 out (8 Gauge)
- Gold Plated Finish
- Allen Screw Terminals

PLDS30 Circuit Breaker Distribution Block

- Power Distribution Block
- Built In Circuit Breaker
- 3 In (4 Gauge)
- 3 Out (8Gauge)
- Allen Screw Treminals
- 40 Amp Power Surge

PLDS5 Power Distribution Block

- Slip-on Top Cover
- 1 in (4 Gauge)
- 4 out (8 Gauge)
- Gold Plated Finish
- Allen Screw Terminals

Marine Video Components

PLMRVW75 7" LCD Splash Proof Monitor with TV Tuner

- 7" Active matrix high resolution TFT-LCD Monitor
- Multi-System Video: NTSC/PAL/SECAM
- Resolution: 1440 (H) x 234 (V)
- Brightness: 500CD/SQ.M
- Contrast: 300
- Viewing Angle: 40°/60°/60°/60°
- Wireless Remote Control Included
- Power Consumption:20W (MAX)
- Power Input : +12V DC
- Dual RCA Audio / Video inputs
- Built-in Speakers
- Built-In TV Tuner NTSC/PAL/SECAM
- Built-In IR Transmitter For Wireless Headphone

PLMRVW105 10.4" LCD Splash Proof Monitor with TV Tuner

- 10.4" Active matrix high resolution TFT-LCD monitor
- Multi-System Video: NTSC / PAL / SECAM
- Resolution: 640 (H) x 480 (V)
- Brightness: 350CD/SQ.M
- Contrast: 350
- Wireless Remote Control Included
- Power Consumption:20W (MAX)
- Power Input : +12V DC
- Dual RCA Audio / Video Inputs
- Built-in Speakers
- Mounting bracket Included
- Anti-Glare Treated Surface
- Hard Protective Coating
- Ultraviolet Screen Protection
- Unit Dimensions: 11.2" x 10.2" x 1.65"
- Built-In Tv Tuner NTSC/PAL/SECAM
- Built-In IR Transmitter For Wireless Headphone
- NTSC/PAL/SECAM Color System Compatible

PLMRVW155 15" LCD Splash Proof Monitor with TV Tuner

- 15" Active matrix high resolution TFT-LCD monitor
- Multi-System Video: NTSC / PAL / SECAM
- Resolution: 1024(H) x 768 (V)
- Brightness: 350 CD/SQ.M
- Contrast: 300
- Viewing Angle: 70°/70°/70°/70°
- Wireless remote control included
- Operating Temperature: 0˚C~60˚ C
- Power Consumption:20W (MAX)
- Power Input : +12V DC
- Dual RCA Audio / Video inputs
- Built-in IR Transmitter for Wireless Headphone
- Built-in Speakers
- Built-In Tv Tuner NTSC/PAL/SECAM
- NTSC/PAL/SECAM Color System Compatible
- Hard Protective Coating
- Anti-Glare Treated Surface

PLDMR3U In Dash Marine CD/DVD Receiver with 3" Built In Monitor

- DVD/VCD/MPEG4/CD/CD-R/CDRW Compatible
- Slide Down Detachable Face
- Treble/Bass/Balance/Fader/Encoder/Volume
- PLL Synthesizer Tuner
- Marine Coded
- Auto Store / Preset Scan
- AM/FM 2 Band Radio
- 30 Station Memory (18FM / 12AM)
- Built-In 3" (16:9) TFT Color Monitor
- PAL / NTSC Color
- On Screen Display Title/Time/Chapter/Subtitle & Angle
- Anti-Shock Mechanism
- ESP Function
- Mute Control
- RCA Line Out
- Selectable View Angle
- A/V Input & A/V Output
- Remote Control
- Rear Camera Output
- 240 Watts (4 x 60 W)
- Last Position Memory
- Dual Zone Function
- Telephone Mute & Hands Free Function
- Full Function Remote Control
- Weather Band
- Digital Audio Output
- Marine Stereo Cover Included

PLDMR23 1.5 DIN Waterproof Marine DVD/CD/MP3 Player Receiver w/Weather Band Radio

- In-Dash Waterproof Marine Player
- DVD/CD/CD-R/CD-RW/MP3/WMA Compatible
- 1.5 DIN Chassis
- PLL Synthesizer Stereo Radio
- Weatherband Radio Function
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wired Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Minute, Second & Track Display
- 30 Station Memory
- Full Function LCD Display
- 2 Channel RCA Output
- Auto Best Station Memory
- Loudness & Mute Button
- Full Illumination
- 4x60 Watts Maximum Total Output

Marine Head Units

PLMR18 AM/FM-MPX PLL Tuning Radio w/SD/MMC & USB

- AM / FM -MPX PLL Tuning Radio
- Dot Matrix LCD Display
- Encoder Volume ,Bass ,Treble, Balance ,Fader Control
- Power output 4 x 50 Watts
- 2 Channel RCA Line Out
- USB Interface (Decode MP3 WMA)
- SD/MMC Slot
- Aux Input
- Remote Control
- Marine Coating
- Blue Illumination

PLMR19W AM/FM-MPX PLL Tuning Radio w/SD/MMC/USB & Weather Band

- AM / FM -MPX PLL Tuning Radio
- Dot Matrix LCD Display
- Volume ,Bass ,Treble, Balance ,Fader Control
- Power output 4 x 50 Watts
- 2 Channel RCA Line Out
- USB Interface (Decode MP3 WMA)
- SD/MMC Slot
- Aux Input
- Remote Control
- Marine Coating
- Blue Illumination
- Weather Band

PLCD9MR AM/FM-MPX In-Dash Marine CD Player w/Full Face Detachable Panel

- In-Dash Marine CD/CDR/CDRW Player
- PLL Synthesizer Stereo Radio
- Anti-Theft Detachable Face
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wireless Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxiliary Input Function
- Minute, Second & Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness & Mute Button
- Full Illumination & Carrying Case
- 4 x 40 Watts Maximum Total Output
- Chassis Dimensions: 7”W x 7”D x 1.96”H

PLCD10MR AM/FM-MPX In-Dash Marine CD/MP3 Player w/Full Face Detachable Panel

- In-Dash Marine CD/MP3 Player
- PLL Synthesizer Stereo Radio
- Anti-Theft Detachable Face
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wireless Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxiliary Input Function
- Minute, Second & Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness & Mute Button
- Full Illumination & Carrying Case
- 4 x 25 Watts Maximum Total Output
- Chassis Dimensions: 7”W x 7”D x 1.96”H

PLCD13MR AM/FM-MPX In-Dash Marine CD/MP3 Player w/Full Face Detachable Panel

- In-Dash Marine CD/MP3 Player
- PLL Synthesizer Stereo Radio
- Anti-Theft Detachable Face
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wired Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxiliary Input Function
- Minute, Second & Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness & Mute Button
- Full Illumination & Carrying Case
- ISO/DIN Chassis 4x25 Watts Mximum Total Output
- Chassis Dimensions: 7”W x 7”D x 1.96”H

Marine Head Units

PLCD15MR AM/FM-MPX In-Dash Marine CD Player w/Full Face Detachable Panel

- In-Dash Marine CD Player
- PLL Synthesizer Stereo Radio
- Anti-Theft Detachable Face
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wired Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- CD Changer Control
- Auxiliary Input Function
- Minute, Second & Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness & Mute Button
- Full Illumination
- 4x40 Watts Maximum Total Output
- Chassis Dimensions: 7"W x 7"D x 1.96"H

PLCD16MRWB AM/FM-MPX In-Dash Marine CD Player/Weather Band Radio w/Full Face Detachable Panel

- In-Dash Marine CD Player
- PLL Synthesizer Stereo Radio
- Weather Band Radio Tuner
- Anti-Theft Detachable Face
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wired Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- CD Changer Control
- Auxiliary Input Function
- Minute, Second & Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness & Mute Button
- Full Illumination
- 4x40 Watts Mximum Total Output
- Chassis Dimensions: 7" W x 7" D x 1.96" H

PLCD18MRMP AM/FM-MPX In-Dash Marine CD/MP3 Player Radio w/Full Face Detachable Panel

- In-Dash Marine CD Player
- MP3 CD Compatible
- PLL Synthesizer Stereo Radio
- Anti-Theft Detachable Face
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wired Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- CD Changer Control
- Auxiliary Input Function
- Minute, Second & Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness & Mute Button
- Full Illumination & Carrying Case
- 4x40 Watts Mximum Total Output
- Chassis Dimensions: 7"W x 7"D x 1.96"H

PLCD19XMR Waterproof Marine CD Player Receiver w/XM Ready Tuner

- In-Dash Marine CD Player
- Anti-Theft Detachable Face
- AM/ FM/ MPX Electronic Tuning Receiver
- CD/ CDR/ CDRW Compatible
- XM Ready Function
- Full Function Wired Remote Control
- 3 Beam Laser Tracking
- 8 x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- CD Changer Control
- Minute/ Second & Track Display
- 25 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination & Carrying Case
- ISO/ DIN Chasis
- 50 x 4 Watts Maximun Power Output
- XM Tuner Cable Included

PLCD20XMRW Waterproof Marine CD Player Receiver w/XM Ready Tuner

- In-Dash Marine CD Player
- Anti-Theft Detachable Face
- AM/ FM/ MPX Electronic Tuning Receiver
- CD/ CDR/ CDRW Compatible
- Weather Band Function
- Full Function Wired Remote Control
- 3 Beam Laser Tracking
- 8 x Oversamping
- Anti-Skip Mechanism
- Auto Power Loading
- CD Changer Control
- Minute/ Second & Track Display
- 25 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination & Carrying Case
- ISO/ DIN Chasis
- 50 x 4 Watts Maximun Power Output
- XM Ready
- XM Tuner Cable Included

PLCD22MRP 1.5 DIN Waterproof Marine CD/MP3 Player Receiver w/Weather Band Radio

- In-Dash Waterproof Marine CD/MP3 Player
- 1.5 DIN Chassis
- CD/CD-R/CD-RW/MP3/WMA Compatible
- PLL Synthesizer Stereo Radio
- Weatherband Radio Function
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wired Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Minute, Second & Track Display
- 30 Station Memory
- Full Function LCD Display
- 2 Channel RCA Output
- Auto Best Station Memory
- Loudness & Mute Button
- Full Illumination
- 4x50 Watts Maximum Total Output

PLCD11MRKT Waterproof Marine CD/MP3 Player Receiver w/ Speaker & Splash Proof Radio Cover

- In-Dash Marine CD/MP3 Player
- Anti-Theft Detachable Face
- AM/ FM/ MPX Electronic Tuning Receiver
- CD/ CDR/ CDRW/ MP3 Compatible
- Full Function Wireless Remote Control
- 3 Beam Laser Tracking
- 8 x Overslamping
- Anti-Skip Mechanism
- Auto Power Loading
- Minute/ Second & Track Display
- 25 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination & Carrying Case
- Pair of 5.25" Waterproof Speakers
- Auxiliary Input on Face Plate
- Splash Proof Radio Housing
- Transparent Smoke Tint Face Cover
- 4 x 25 Watts Maximum Total Output
- Chassis Dimensions: 7" W x 7" D x 1.96" H
- Sold as: Unit

PLCD14MRKT Waterproof Marine CD/MP3 Player Receiver w/ Speaker & Splash Proof Radio Cover

- In-Dash Marine CD/MP3 Player
- Anti-Theft Detachable Face
- AM/ FM/ MPX Electronic Tuning Receiver
- CD/ CDR/ CDRW/ MP3 Compatible
- Full Function Wireless Remote Control
- 3 Beam Laser Tracking
- 8 x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Minute/ Second & Track Display
- 25 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination & Carrying Case
- Pair of 5.25" Waterproof Speakers
- Auxiliary Input on Face Plate
- Splash Proof Radio Housing
- Transparent Smoke Tint Face Cover
- 4 x 25 Watts Maximum Total Output
- Chassis Dimension: 7" W x 7" D x 1.96"H

PLCD12MRKT Waterproof Marine CD Player Receiver w/ Speakers

- In-Dash Marine CD Player
- Anti-Theft Detachable Face
- AM/ FM/ MPX Electronic Tuning Receiver
- CD/ CDR/ CDRW Compatible
- Full Function Wireless Remote Control
- 3 Beam Laser Tracking
- 8 x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- CD Changer Control
- Minute/ Second & Track Display
- 25 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination
- 50 x 4 Watts Maximun Power Output
- Pair of 5.25' Waterproof Speaker
- Chassis Dimensions: 7" W x 7" D x 1.96" D

PLMRNT1 Marine Wire Antenna

- Weather Resistant AM/FM Marine Antenn
- Provides excellent Radio reception

PLMRJPT iPod/MP3 Waterproof 3.5mm Stereo to RCA Adaptor

- Waterproof 3.5mm Stereo To RCA Adaptor
- Allows Direct Connection Of Any Headphone Equipped Audio Device To Your Existing RCSs On The Head Unit
- Splash Cover
- Mounting Diagram For A Factory Finish Installation
- Stereo 3.5mm Audio Cable

PLMRIPWG iPod/MP3 Waterproof 3.5mm Stereo to RCA Adaptor

- Waterproof 3.5mm Stereo To RCA Adaptor
- Allows Direct Connection Of Any Headphone Equipped Audio Device To Your Existing RCAs On The Head Unit
- Easily Mounted Under Dash For Convenience
- Stereo 3.5mm Audio Cable Included

PLMRCB1 Water Resistant Stereo Housing

- Protects your stereo from the elements
- Smoke colored housing window
- Spring Loaded Flip-up Door
- Support Shelf for radio in Rear of Housing
- UV Resistant Plastic
- Black Base Color

PLMRCW1 Water Resistant Stereo Housing

- Protects your stereo from the elements
- Smoke colored housing window
- Spring Loaded Flip-up Door
- Support Shelf for radio in Rear of Housing
- UV Resistant Plastic
- White Base Color

PLMRCW2 Water Resistant Stereo Housing

- Protects your stereo from the elements
- Smoke colored housing window
- Spring Loaded Slide-up Door
- Support Shelf for radio in Rear of Housing
- UV Resistant Plastic

PLMRCW3 Water Resistant Stereo Housing w/Full Chassis Casing

- Protects Your Stereo from the Elements
- Smoke Colored Housing Window
- Spring Loaded Flip-up Door
- Support Shelf for Radio in Rear of Housing
- UV Resistant Plastic
- Full Radio Casing
- Mounting Brackets and Hardware Included
- 18 AWG Wire
- 50ft Length
- Marine Grade Insulation
- Ideal for new Marine Installation

PLMRAKT8 Marine Grade 8 Gauge Amplifier Installation Kit

- Marine Grade Cables and Wires
- Perfect for Installations in Boats and Outdoor
- High Resistance to Moisture
- 20ft. 8 Gauge Red Power Wire
- 4ft. 8 Gauge Black ground Wire
- 20ft. 16 Gauge Blue Remote Turn-On
- 20ft. 12 Gauge Speaker Wire
- 20ft. Right Angle RCA Audio Cable
- 6ft. Black Split loom Cable Conduit
- AGU Type 60A Gold Plated Fuse
- Water Resistant In-line Fuse Holder
- 2 Ring Terminals: 8G
- 2 Spade Terminals: 8G
- 5 Spade Terminals: 14-16G
- 3 Butt Connectors 20 Cable Ties
- 1 Black Grommet

PLMRA120 2 Channel 240W Waterproof Marine Amplifier

- IC Power 120 Watts x 2 Output
- Variable Input Gain Control
- Power ON LED Indicator
- High/Low Level Input
- Remote Turn On/Off
- Speaker Output Connector
- Gold Plated RCA Inputs
- Thermal / Overload / Short Circuit Protection
- Heavy Duty Aluminum Alloy Heatsink
- Load Dump Over Voltage Thermal Shutdown AC/DC Short Circuit Protector
- Dimensions: 7.87"W x 2"H x 5.20"L
- Weight: 2.30 (lbs)

PLMRA400 4 Channel 400W Waterproof Marine Amplifier

- IC Power 100 Watts x 4 Output
- Variable Input Gain Control
- Power ON LED Indicator
- High/Low Level Input
- Remote Turn On/Off
- Speaker Output Connector
- Gold Plated RCA Inputs
- Thermal / Overload / Short Circuit Protection
- Heavy Duty Aluminum Alloy Heatsink
- Load Dump Over Voltage
- Dimensions: 7.87"W x 2"H x 8.0"L
- Weight: 3.30 (lbs)

PLMRA200 2 Channel 400W Waterproof Marine Amplifier

- 200 Watts x 2 Output
- 400 Watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- MOSFET Power Supply
- Variable Input Gain Control
- Power ON LED Indicator
- Protection LED Indicator
- High/Low Level Input
- Remote Turn On/Off
- Speaker Output Connector
- Gold Plated RCA Inputs
- Soft Turn-On Circuit
- Thermal / Overload / Short Circuit Protection
- Heavy Duty Aluminum Alloy Heatsink
- Dimensions: 7.87"W x 2"H x 10"L
- Weight: 4.20 (lbs)

PLMRA220 2 Channel 600 Watt Waterproof Marine MOSFET Amplifier

- 300 Watts x 2 Output
- 600 Watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Bass Boost
- Power LED Indicator
- LED Protection Indicator
- Blue LED Level Display
- Variable Input Level (Gain) Control
- Thermal, Overload, Short Circuit Protection
- Dimensions: 10.9"W x 2.7"H x 8.25"L

PLMRA420 4 Channel 1000 Watt Waterproof Marine MOSFET Amplifier

- 250 Watts x 4 Output
- 500 Watts x 2 Bridged Output
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual Variable Bass Boost
- Power LED Indicator
- LED Protection Indicator
- Blue LED Level Display
- Tri-Mode Configurable
- Variable Input Level (Gain) Control
- Thermal, Overload, Short Circuit Protection
- Dimensions: 10.9" W x 2.7" H x 12" L

PLMRA620 Waterproof Marine 2000W 6 Channel MOSFET Amplifier

- 4x 100W + 2x 250W RMS at 4 Ohms
- 4x 250W + 2x 500W MAX at 4 Ohms
- 2x 400W + 1x 900W MAX at 4 Ohms Bridged
- 4x 175W + 1x 400W RMS at 2 Ohms
- Variable Hi/Lo Electronic Crossover Network (CH1 / CH2 and CH3 / CH4)
- Variable Bass Boost (CH5 / CH6)
- 2 Ohm Stereo Stable
- Power ON LED Indicator
- Protection LED Indicator
- Gold RCA Inputs
- Remote Bass Boost
- Blue LED Level Display
- Soft Turn On/Off
- Tri-Mode Configurable
- Low and High Pass Filter Controls (CH3 / CH4)
- Variable Input Level (Gain) Control
- Thermal / Overload / Short Circuit Protection
- Dimensions: 10.9"W x 2.7"H x 19.6"L

PLMRA1000D Waterproof Marine 2000 Watt Mono Block MOSFET Digital Amplifier

- Mono Block Subwoofer Amplifier
- 1 Ohm Stable
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB
- Gold RCA Inputs
- Remote Bass Boost
- Blue LED Level Display
- Soft Turn On/Off
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Variable Subsonic Filter (15Hz~40Hz, 24dB/Octave)
- Phase Control 0-180 degree
- Input Impedance : 10K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions: 10.9"W x 2.7"H x 12"L

PLMR53 5.25" 150 Watt Two-Way Shielded Marine Water Proof Speakers

- 5.25" Shielded Two-Way Speakers
- Completely Waterproof
- For Marine or Car Use
- Built-in Molded Grill
- .75" Dome Tweeter
- 1" Voice Coil
- Molded ABS Plastic Basket
- 13oz Shielded Magnet
- Frequency Response: 70Hz - 20k Hz
- 4 Ohms Impedance
- 150 Watts Peak Power
- Complete with Wires

PLMR63 6.5" 400 Watt Two-Way Shielded Marine Water Proof Speakers

- 6.5" Shielded Two-Way Speakers
- Completely Waterproof
- For Marine or Car Use
- Built-in Molded Grill
- .75" Dome Tweeter
- 1" Voice Coil
- Molded ABS Plastic Basket
- 16oz Shielded Magnet
- Frequency Response: 60Hz - 20k Hz
- 4 Ohms Impedance
- 400 Watts Peak Power
- Complete with Wires & Mounting Hardware

PLMRX67 250 Watts 6.5" 2 Way Marine Speaker System

- 6.5" High Quality White Polypropylene Cone
- Santoprene Surround
- Water-resistant Construction
- 2 Way attachable grille design
- 1" High Temperature KEISV Voice Coil
- .75" Neodymium Dome Tweeter
- 35 Oz Magnet Structure
- 250 Watts Rated Peak Power
- Frequency Response: 65Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 90dB

PLMRX69 300 Watts 6" x 9" 2 Way Marine Water Proof Speaker System

- 6" x 9" High Quality White Polypropylene Cone
- Santoprene Surround
- Water-resistant Construction
- 2 Way attachable grille design
- 1.25" High Temperature KEISV Voice Coil
- 1" Neodymium Dome Tweeter
- 70 Oz Magnet Structure
- 300 Watts Rated Peak Power
- Frequency Response: 50Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 93dB

PLMRX77 280 Watts 7.7" 2 Way Marine Speaker System

- 7.7" High Quality White Polypropylene Cone
- Santoprene Surround
- Water-resistant Construction
- 2 Way attachable grille design
- 1.25" High Temperature KEISV Voice Coil
- .75" Neodymium Dome Tweeter
- 70 Oz Magnet Structure
- 280 Watts Rated Peak Power
- Frequency Response: 50Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 92dB

PLMR65C 250 Watts 6.5" 2 Way Marine Component Speaker System

- 6.5" High Quality White Polypropylene Cone
- Santoprene Surround
- Water-resistant Construction
- 2 Way attachable grille design
- 1" High Temperature KEISV Voice Coil
- 1" Neodymium Dome Tweeter
- Flush and Angled surface Mount Capabilites
- 2-Way Passive Crossover Network
- 40 Oz Magnet Structure
- 250 Watts Rated Peak Power
- Frequency Response: 60Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 91dB

PLMR51B 5.25" 100 Watts Dual Cone Waterproof Stereo Speaker System

- 5.25" Dual Cone Full-Range Speakers
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone w/Cloth Surround
- Built-in Molded Grill
- Molded ABS Plastic Basket
- 20oz Circuit Magnet
- Frequency Response: 100Hz - 18k Hz
- 4 Ohms Impedance
- Slim Mounting Depth: 1.5"
- 100 Watts Rated Power
- Complete with Wires & Mounting Hardware

PLMR51W 5.25" 100 Watts Dual Cone Waterproof Stereo Speaker System

- 5.25" Dual Cone Full-Range Speakers
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone w/Cloth Surround
- Built-in Molded Grill
- Molded ABS Plastic Basket
- 20oz Circuit Magnet
- Frequency Response: 100Hz - 18k Hz
- 4 Ohms Impedance
- Slim Mounting Depth: 1.5"
- 100 Watts Rated Power
- Complete with Wires & Mounting Hardware

PLMR61B 6.5” 120 Watts Dual Cone Waterproof Stereo Speaker System(BLACK)

PLMR61W 6.5” 120 Watts Dual Cone Waterproof Stereo Speaker System (WHITE)

- 6.5” Dual Cone Full-Range Speakers
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone w/Cloth Surround
- Built-in Molded Grill
- Molded ABS Plastic Basket
- 20oz Circuit Magnet
- Frequency Response: 45Hz - 16k Hz
- 4 Ohms Impedance
- Slim Mounting Depth: 1.5”
- 100 Watts Rated Power
- Complete with Wires & Mounting Hardware

PLMR52 5.25” 150 Watt Two-Way Marine Water Proof Speaker System

- 5-1/4” High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 1” High Temperature Voice Coil
- 1/2” Neodymium Dome Tweeter
- 150 Watts Rated Peak Power
- Frequency Response: 100Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 88dB

PLMR62 6.5” 200 Watt Two-Way Marine Water Proof Speaker System

- 6.5” High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 1” High Temperature Voice Coil
- 1/2” Neodymium Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 85Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 90dB

PLMR692 6” x 9” 260 Watt Two-Way Marine Water Proof Speakers

- 6” x 9” High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 40 oz Magnet Structure
- 1.5” High Temperature Voice Coil
- 1/2” Neodymium Dome Tweeter
- 260 Watts Peak Power
- Frequency Response: 55-20,000 Hz
- 4 Ohm Impedance
- Sensitivty: 92 dB

PLMR82 8” 300 Watt Two-Way Marine Water Proof Speaker System

- 8” High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 1.5” High Temperature Voice Coil
- .5” Neodymium Dome Tweeter
- 300 Watts Peak Power
- Frequency Response: 60-20k Hz
- 4 Ohm Impedance
- Sensitivty: 91 dB

PLMR5K 5.25” 200 Watt 2-Way Marine Component Speaker System

- One Pair 5.25” Mid Bass Speaker:
- 5.25” High Quality Poly Carbon Cone
- Water Resistant Construction Design
- 1” High Temperature Voice Coil
- 75 Watts RMS/150 Watts Peak Power
- Frequency Response: 100Hz-20K Hz
- 4 Ohm Impedance One Pair 1” Neodymium Dome Tweeter:
- 1” PEI Dome Tweeter
- Neodymium Magnet
- 2 Mounting Options: Flush / Surface Mount
- 50 Watts RMS / 100 Watts Peak
- Frequency Response: 1.4-24KHz
- Impedance: 4 Ohms One Pair Passive Crossover Network:
- Two Way passive Crossovers
- Water Proof ABS Protective Hosing
- Direct Connect Woofer and Tweeter Wiring
- 12dB Octave SlopeAccessories:
- Built in Plastic Grills
- Mounting Hardware
- Wiring Kit
- Wiring Diagram & Template
- Mounting Depth : 2.15”

PLMR6K 6-1/2” 200 Watt 2-Way Marine Component Speaker System

- One Pair 6.5” Mid Bass Speaker:
- 6.5” High Quality Poly Carbon Cone
- Water Resistant Construction Design
- High Temperature Voice Coil
- 100 Watts RMS/ 200 Watts Peak
- Frequency Response: 85-6KHz
- Impedance: 4 Ohms
- One Pair 1” Neodymium Dome Tweeter:
- 1” PEI Dome Tweeter
- Neodymium Magnet
- 2 Mounting Options: Flush / Surface Mount
- 50 Watts RMS / 100 Watts Peak
- Frequency Response: 1.4-24KHz
- One Pair Passive Crossover Network:
- Two Way passive Crossovers
- Water Proof ABS Protective Hosing
- Direct Connect Woofer and Tweeter Wiring
- 12dB Octave SlopeAccessories:
- Built in Plastic Grills
- Mounting Hardware
- Wiring Kit
- Wiring Diagram & Template
- 2-Way Water Resistant Construction Design
- 1” High Temperature Voice Coil
- 1/2” Neodymium Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 85Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 90dB

Marine Speakers

PLMR34 3.5” 200 Watt Two Way Sealed Speaker System

- Excellent for Monitor or Surround Sound Applications
- 3.5” Long Throw Woofer
- 1/2” Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 85Hz-20k Hz
- 8 Ohm Impedance
- Vented Design For High Power and Deep Bass Response
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 5.35”W x 7.75”H x 4.9”D

PLMR44 4” 250 Watt Two Way Sealed Speaker System

- Excellent for Monitor or Surround Sound Applications
- 4” Long Throw Woofer
- 3/4” Polymer Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 85Hz-20k Hz
- 8 Ohm Impedance
- Vented Design For High Power and Deep Bass Response
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions:6.75”W x 9.06”H x 6”D

PLMR54 5.25” 300 Watt Two Way Sealed Speaker System

- Excellent for Monitor or Surround Sound Applications
- 5.25” Long Throw Woofer
- 1” Polymer Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 75Hz-20k Hz
- 8 Ohm Impedance
- Vented Design For High Power and Deep Bass Response
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 7.375”W x 10.625”H x 8.5”D

PLMRW65 6-1/2” 200 Watt Two-Way Wake Board Speaker

- Excellent For Monitor or Surround Sound Applications
- Water Resistant Construction Design
- 6-1/2” Poly Mica Woofer Cone
- Butyl Rubber Surround
- 25Oz. Magnet Structure
- 1/2” Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20KHz
- 4 Ohm Impedance
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 8-3/4” D x 10-1/4” L

PLMRW85 8” 300 Watt Two-Way Wake Board Speaker

- Excellent For Monitor or Surround Sound Applications
- Water Resistant Construction Design
- 8” Poly Mica Woofer Cone with Butyl Rubber Surround
- 30Oz. Magnet Structure
- 1” Polymer Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 60Hz-20KHz
- 4 Ohm Impedance
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 10” Diameter x 9” Length

PLMRB65 6.5” 200 Watt Two-Way Wake Board Speaker

- Excellent for Monitor or Surround Sound Applications
- 3.5” Long Throw Woofer
- 1/2” Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 85Hz-20k Hz
- 8 Ohm Impedance
- Vented Design For High Power and Deep Bass Response
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 5.35” W x 7.75” H x 4.9” D

PLMRB85 8” 300 Watt Two-Way Wake Board Speaker

- Excellent For Monitor or Surround Sound Applications
- Water Resistant Construction Design
- 8”Poly Mica Woofer Cone with Butyl Rubber Surround
- 30Oz. Magnet Structure
- 1” Polymer Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 60Hz-20KHz
- 4 Ohm Impedance
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 10” Diameter x 9” Length

Marine Subwoofers

PLMR60W 6 1/2" 2-Way Marine Speakers

- Weather, Heat-Resistant Speakers
- Frequency Response: 65Hz-18/20 Khz
- 6 1/2" Polypropylene Woofers W 11Oz Magnet
- One-Piece ABS Basket And Santopren Rubber Surround
- Magnetically Shielded
- Mounting Depth 3 13/16"
- 150W Max, Dual Cone

PLMRDW104 500 Watts 10" Marine Woofer Speaker System

- 10" High Quality White Polypropylene Cone
- Santoprene Surround
- Water-resistant Construction
- 2 Way attachable grille design
- 2" High Temperature TILEISV Voice Coil
- 60 Oz Magnet Structure
- 500 Watts Rated Peak Power
- Frequency Response: 35Hz-3.2K Hz
- 4 Ohm Impedance
- Sensitivity: 90dB

PLMRDW124 600 Watts 12" Marine Woofer Speaker System

- 12" High Quality White Polypropylene Cone
- Santoprene Surround
- Water-resistant Construction
- 2 Way attachable grille design
- 2" High Temperature TILEISV Voice Coil
- 80 Oz Magnet Structure
- 600 Watts Rated Peak Power
- Frequency Response: 28Hz-2.5K Hz
- 4 Ohm Impedance
- Sensitivity: 92dB

PLMRW8 8" 400 Watt High Power Marine Woofer

- 8" High Quality Polypropylene Cone
- Water Resistant Construction Design
- 40 oz Magnet Structure
- 1.5" High Temperature Voice Coil
- 400 Watts Peak Power
- Frequency Response: 25-2.5K Hz
- 4 Ohm Impedance
- Sensitivity: 91 dB

PLMRW10 10" 500 Watt High Power Marine Woofer

- 10" High Quality Polypropylene Cone
- Water Resistant Construction Design
- 60 oz Magnet Structure
- 1.5" High Temperature Voice Coil
- 500 Watts Peak Power
- Frequency Response: 25-2.5K Hz
- 4 Ohm Impedance
- Sensitivity: 93 Db

PLMRW12 12" 600 Watt High Power Marine Woofer

- 12" High Quality Polypropylene Cone
- Water Resistant Construction Design
- 80 Oz Magnet Structure
- 2" High Temperature Voice Coil
- 600 Watts Peak Power
- Frequency Response: 20-2.2K Hz
- 4 Ohm Impedance
- Sensitivity: 94 Db

Marine Subwoofers/ RCA Cables

PLMRTBA8 8" 400 Watt Amplified Marine Subwoofer Tube

- One 8" High Power 4 Ohm Subwoofer
- Water Resistant Design
- High Quality Poly Mica Cone
- Non-Fatiguing Butyl Rubber Surround
- 1.5" High Temperature Aluminum Voice Coil
- Bass Reflex Vented for Added Sub-Bass Response
- High Quality Plastic Construction
- Dimensions: 10" Diameter x 20" Length
- 35 oz. Magnet Structure
- Power Handling: 200 Watts RMS /400 Watts Peak
- Frequency Response: 50-150KHz
- Impedance: 4 Ohms
- Includes Plastic Mounting Bracket, Wires and Instal lation Hardware

PLMRTB8P 8" 400 Watt Passive Marine Subwoofer Tube

- One 8" High Power 4 Ohm Subwoofer
- Water Resistant Design
- High Quality Poly Mica Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" High Temperature Aluminum Voice Coil
- Bass Reflex Vented for Added Sub-Bass Response
- High Quality Plastic Construction
- Dimensions: 10" Diameter x 26" Length
- 60 oz. Magnet Structure
- Power Handling: 200 Watts RMS /400 Watts Peak
- Frequency Response: 45-2KHz
- Impedance: 4 Ohms
- Includes Plastic Mounting Bracket, Wires and Instal lation Hardware

PLMRSW50 High Performance Marine Grade Speaker Wire

- 18 AWG Wire
- 50ft Length
- Marine Grade Insulation
- Ideal for new Marine Installation

PLMRCA12F 12' Waterproof RCA Cables

- Waterproof RCA Cables
- Marine Grade Insulation
- 12' Dual RCA Spiral Braid Cable
- OFHC (Oxygen Free Hyper Conductor)
- Gold Contact RCA Connectors

PLMRCA18F 18' Waterproof RCA Cables

- Waterproof RCA Cables
- Marine Grade Insulation
- 18' Dual RCA Spiral Braid Cable
- OFHC (Oxygen Free Hyper Conductor)
- Gold Contact RCA Connectors

PLMRCA6F 6' Waterproof RCA Cables

- Waterproof RCA Cables
- Marine Grade Insulation
- 6' Dual RCA Spiral Braid Cable
- OFHC (Oxygen Free Hyper Conductor)
- Gold Contact RCA Connectors

Bulbs & Lighting Accessories

PL1156BL Blue LED Reverse Light Bulbs
PL1156RD Red LED Brake Light Bulbs
PL1157YL Yellow LED Directional Lights Bulbs
PL1157BL Blue LED Reverse Light Bulbs
PL1156YL Yellow LED Directional Lights Bulbs
PL3156BL Blue LED Reverse Light Bulbs
PL3156RD Red LED Brake Light Bulbs
PL3156YL Yellow LED Directional Lights Bulbs
PL3157BL Blue LED Reverse Light Bulbs
PL3157YL Yellow LED Directional Lights Bulbs

PL9004 100/80 Watts Halogen Headlight Bulbs
PL9007 100/80 Watts Halogen Headlight Bulbs
PL9005 100 Watts Halogen Headlight Bulbs
PLBL9006 55 Watts Halogen Headlight Bulbs
PLH1 100 Watts Halogen Headlight Bulbs
PLYL9006 55 Watts Halogen Headlight Bulbs

- Halogen Headlight Bulbs
- Xenon Super Beam Replacement Bulbs

PLCGLEDBL Blue Cigarette Lighter Plug

PLCGLEDSL Silver Cigarette Lighter Plug

- 6 Different lighting Sequences

PLCMTBL Blue LED Chrome Exhaust Tip

PLCMTGR Green LED Chrome Exhaust Tip

PLCMTPR Purple LED Chrome Exhaust Tip

- Fast and Easy Installation
- Emits A Brilliant Blast of LED Light
- Polished Steel Housing
- Tips Accepts Exhaust w/ 2.5'' Diameter or Smaller
- Dimensions: 6'' Length x 3.25'' Diameter

PLCOOL6 Automotive Cooler/Warmer

- Cools to 20°-25°C Below Ambient Temperature
- Warms to +65 Degrees C
- Hot/Cold, On/Off Switch
- Red/Green LEDs Indicate Warming
- Power Consumption: 48 Watts
- Non-Wearing Thermo Electric (Peltier System)
- Handle Recesses When Not In Use
- Convenient-Plug Into Any 12 Volt Cigarette Lighter In Car, Boat or Plugs into AC Adapter Indoors
- 9 ft. Detachable Power Cord
- Full Polyurethane-Foam Lining Without CFC
- Operates On DC 12V, AC-110V or 220V

PLDGR10BL 10” Blue LED Speaker Rings Kit
PLDGR10MC 10” Multi-Color LED Speaker Rings Kit
PLDGR12BL 12” Blue LED Speaker Rings Kit
PLDGR12MC 12” Multi-Color LED Speaker Rings Kit

- Multiple LED Flash VariationsKit Contains:
- 2 Speaker Rings
- 3 Position Control Switch: On/Off/Sound Activated
- All Wiring and Mounting Hardware

PLDNL12 Double DIN Sound Activated Neon Radio Ring

- Creates A Blue Neon Glow of Light Around Your Car Radio
- Constant Illumination or Pulsates to The Music
- Cigarette Lighter Plug-In
- Quick and Easy Installation
- Built-In 12V Transformer
- Bright Blue Neon Glow for The Interior of Your Car
- Sensor Adjustable to The Music Volume
- Self Stick Back, No Brackets required

PLED4UGR Green LED Underbody Car Accent Lighting Kit
PLED4UPR Purple LED Underbody Car Accent Lighting Kit
PLED4UWT White LED Underbody Car Accent Lighting Kit
PLED4UYL Yellow LED Underbody Car Accent Lighting Kit

- Kit Includes:
- Two 48” 7 Color LED Tubes
- Two 36” 7 Color LED Tubes
- 10 Visual Flash Patterns
- Water-Resistant High-Impact Optical acrylic tubes
- Directly connected to battery (car can be on/off)
- Installation Hardware
- Compatible with all 12 V Car & Truck Installs

PLEG12BL 12” Blue LED Plexi Woofer Grill
PLEG12MC 12” Multi-Color LED Plexi-Woofer Grill
PLEG12RD 12” Red LED Plexi Woofer Grill

- Embossed Plexi Woofer Grill
- Brushed Aluminum Grill Ring
- Bright LED Shines Constant or Pulsates to Music
- Oversized Ring compatible with Most Woofers
- Ultra Sturdy Construction

PLEGMC Multi-Colored LED Manual Gear Shifter Knob

- Multi-Colored LED’s
- Fits All Manual Shifters
- Long Lasting Internal Battery
- All Electronics Built-In
- Activator Button on tip
- Multiple Light Patterns

PLESA10PR 10” Purple LED Sound Activated Light Rod
PLESA10WT 10” White LED Sound Activated Light Rod
PLESA10YL 10” Yellow LED Sound Activated Light Rod

PLESA15GR 15” Green LED Sound Activated Light Rod
PLESA15PR 15” Purple LED Sound Activated Light Rod
PLESA15WT 15” White LED Sound Activated Light Rod
PLESA15YL 15” Yellow LED Sound Activated Light Rod

PLESA20GR 20” Green LED Sound Activated Light Rod
PLESA20PR 20” Purple LED Sound Activated Light Rod
PLESA20RD 20” Red LED Sound Activated Light Rod
PLESA20WT 20” White LED Sound Activated Light Rod
PLESA20YL 20” Yellow LED Sound Activated Light Rod

- Sound Activated Mechanism Is Built-In to The Trans former Housing
- 3-Way Switch (On/Off/Dance to Music)
- Contains: 1 Tube with Built-In Transfomer & Cigarette Lighter Plug

PLLD70BL High Power Blue Halogen Lamp Set
PLLD70RB High Power Rainbow Blue Halogen Lamp Set
PLLD70RR High Power Rainbow Red Halogen Lamp Set
PLLD70WT High Power White Halogen Lamp Set

- Dramatically Improves Driver Vision
- Lightweight & Compact Design
- Easy to Install
- Universal Mounting Fits Any Car
- Quartz Halogen
- 12 Volt 35 Watt H3 Bulbs
- Non Corrosive Housing
- Glass Lens Provides Excellent Light Transmission
- Quick & Easy Universal Mounting

PLLD73RB High Power Rainbow Blue Halogen Lamp Set

PLLD73RR High Power Rainbow Red Halogen Lamp Set

- Dramatically Improves Driver Vision
- Lightweight & Compact Design
- Easy to Install
- Universal Mounting Fits Any Car
- Quartz Halogen
- 12 Volt 55 Watt H3 Bulbs
- Non Corrosive Housing
- Glass Lens Provides Excellent Light Transmission
- Quick & Easy Universal Mounting

PLLD75BL High Power Blue Halogen Lamp Set
PLLD75RB High Power Rainbow Blue Halogen Lamp Set
PLLD75RR High Power Rainbow Red Halogen Lamp Set
PLLD75WT High Power White Halogen Lamp Set

- Dramatically Improves Driver Vision
- Lightweight & Compact Design
- Easy to Install
- Universal Mounting Fits Any Car
- Quartz Halogen
- Non Corrosive Housing
- Glass Lens Provides Excellent Light Transmission
- Quick & Easy Universal Mounting

PLLD78BL High Power Blue Halogen Lamp Set
PLLD78RB High Power Rainbow Blue Halogen Lamp Set
PLLD78RR High Power Rainbow Red Halogen Lamp Set
PLLD78WT High Power White Halogen Lamp Set

- Dramatically Improves Driver Vision
- Lightweight & Compact Design
- Easy to Install
- Universal Mounting Fits Any Car
- Quartz Halogen
- 12 Volt 55 Watt H3 Globes
- Non Corrosive Housing
- Glass Lens Provides Excellent Light Transmission
- Quick & Easy Universal Mounting

Halogen Lamp Kits

PLLD83BL High Power Blue Halogen Lamp Set
PLLD83RB High Power Rainbow Blue Halogen Lamp Set
PLLD83RR High Power Rainbow Red Halogen Lamp Set
PLLD83WT High Power White Halogen Lamp Set

- Dramatically Improves Driver Vision
- Lightweight & Compact Design
- Easy to Install
- Universal Mounting Fits Any Car
- Quartz Halogen
- 12 Volt 55 Watt H3 Bulbs
- Non Corrosive Housing
- Glass Lens Provides Excellent Light Transmission
- Quick & Easy Universal Mounting

PLLD85BL High Power Blue Halogen Lamp Set
PLLD85RB High Power Rainbow Blue Halogen Lamp Set
PLLD85RR High Power Rainbow Red Halogen Lamp Set
PLLD85WT High Power White Halogen Lamp Set

- Dramatically Improves Driver Vision
- Lightweight & Compact Design
- Easy to Install
- Universal Mounting Fits Any Car
- Quartz Halogen
- 12 Volt 55 Watt H3 Globes
- Non Corrosive Housing
- Glass Lens Provides Excellent Light Transmission
- Quick & Easy Universal Mounting

PLLD86BL High Power Blue Halogen Lamp Set
PLLD86RB High Power Rainbow Blue Halogen Lamp Set
PLLD86RR High Power Rainbow Red Halogen Lamp Set
PLLD86WT High Power White Halogen Lamp Set

- Dramatically Improves Driver Vision
- Lightweight & Compact Design
- Easy to Install
- Universal Mounting Fits Any Car
- Quartz Halogen
- 12 Volt 55 Watt H3 Globes
- Non Corrosive Housing
- Glass Lens Provides Excellent Light Transmission
- Quick & Easy Universal Mounting

PLLD87BL High Power Blue Halogen Lamp Set
PLLD87RB High Power Rainbow Blue Halogen Lamp Set
PLLD87RR High Power Rainbow Red Halogen Lamp Set
PLLD87WT High Power White Halogen Lamp Set

- Dramatically Improves Driver Vision
- Lightweight & Compact Design
- Easy to Install
- Universal Mounting Fits Any Car
- Quartz Halogen
- 12 Volt 55 Watt H3 Globes
- Non Corrosive Housing
- Glass Lens Provides Excellent Light Transmission
- Quick & Easy Universal Mounting

PLNLR12GR 12” Green Neon Light Rod

PLNLR24GR 24” Green Neon Light Rod
PLNLR24PR 24” Purple Neon Light Rod

- Suitable For Decorative Use On Cars, Boats and In The Home
- Contains: 1 Tube with Built-In Transfomer & Cigarette Lighter Plug

PLNLRSA12GR 12” Green Neon Sound Activated Light Rod

PLNLRSA12PR 12” Purple Neon Sound Activated Light Rod

- Sound Activated Mechanism Is Built-In to the Transformer Housing
- 3-Way Switch (On/Off/Dance to Music)
- Contains: 1 Tube with Built-In Transfomer & Cigarette Lighter Plug

PLNR15BL 15” Blue Neon Speaker Rings Kit
PLNR15GR 15” Green Neon Speaker Rings Kit
PLNR15PR 15” Purple Neon Speaker Rings Kit

- Kit Contains:
- 2 Speaker Rings
- 3 Position Control Switch: On/Off/Sound Activated
- All Wiring and Mounting Hardware

PLNW15 15ft. Neon Light Wire Kit
PLNW6 6ft. Neon Light Wire Kit

- The Ultimate Neon Accessory For Anything, Anywhere:
- Speakers Covers, Running Boards, Motorcycles, Cars, Trucks,
- Interior Accent
- Quick and Easy Installation Trims To Any Length
- Connects to Any 12 Volt Power Source
- Waterproof For All Year Around Durability
- Provides Long Lasting Brightness
- Low Voltage
- Light In Extreme Temperatures
- Kit Includes: Transformer, Neon Wire and Neon Wire Adhesive

PLPDA2BL Blue Indiglo Automatic Pedals
PLPDA2GR Green Indiglo Automatic Pedals
PLPDA2PR Purple Indiglo Automatic Pedals

- 12 Volt System
- Mounting Hardware Included
- On/Off Switch

PLPDM3BL Blue Indiglo Manual Pedals
PLPDM3GR Green Indiglo Manual Pedals
PLPDM3PR Purple Indiglo Manual Pedals

- 12 Volt System
- Mounting Hardware Included
- On/Off Switch

PLPR4UBK Purple Neon Underbody Car Accent Lighting Kit

- Water-Resistant High-Impact Optical acrylic tubes
- Directly connected to battery (car can be on/off)
- Installation Hardware
- Compatible with all 12 V Car & Truck Installs Kit

Includes:
- Two 48” Neon Tubes
- Two 36” Neon Tubes
- Switch, In Line Fuse

PLSC12BL Blue LED Scan Stick
PLSC12GR Green LED Scan Stick
PLSC12MC Multi-Color LED Scan Stick
PLSC12PR Purple LED Scan Stick
PLSC12RD Red LED Scan Stick
PLSC12WT White LED Scan Stick

- Great Interior Accent
- Adjustable Swivel Mount
- Has 8 Different Flashing Light Patterns
- Cigarette Lighter Adapter

PLSC13BL Blue LED Mini Scan Stick
PLSC13GR Green LED Mini Scan Stick
PLSC13MC Multi-Color LED Mini Scan Stick
PLSC13PR Purple LED Mini Scan Stick
PLSC13RD Red LED Mini Scan Stick
PLSC13WT White LED Mini Scan Stick

- Great Interior Accent
- Mini Size for Convenience
- LED Lights Dance At Random
- Cigarette Lighter Adapter

PLSL1BL Blue LED Screw Light
PLSL2GR Green LED Screw Light
PLSL2PR Purple LED Screw Light
PLSL2WT White LED Screw Light
PLSL2YL Yellow LED Screw Light

- Studded Light
- Can Be Mounted Almost Anywhere:
- License Plate, Dash Board or Alarm Indicator
- Long Lasting
- High Efficiency Bulbs
- Sold In Pairs

PLSC99 Lighted Seat Cushion/Cover

- Blue Illuminated Accent Piping
- Additional Lumber Support Cushion
- Durable Leather Feel Material
- DC12 Volt Cigarette Lighter Jack

Lighting Accessories

PLSLM5BL Blue LED Side Marker Light
PLSLM5GR Green LED Side Marker Light
PLSLM5PR Purple LED Side Marker Light
PLSLM5RD Red LED Side Marker Light
PLSLM5WT White LED Side Marker Light

PLSLM4BL Blue LED Side Marker Light
PLSLM4GR Green LED Side Marker Light
PLSLM4PR Purple LED Side Marker Light
PLSLM4RD Red LED Side Marker Light

PLSML1BL Blue LED Side Marker Light
PLSML2BL Blue LED Side Marker Light
PLSML2GR Green LED Side Marker Light
PLSML2PR Purple LED Side Marker Light
PLSML2RD Red LED Side Marker Light
PLSML2WT White LED Side Marker Light
PLSML2YL Yellow LED Side Marker Light
PLSLM4WT White LED Side Marker Light

- Easy Installation
- Great Exterior Accent
- Chrome Housing
- Rubber Water Resistant Gasket
- Ultra Bright LED's

PLSLMC3 Multi Colored LED Screw Light

- Studded Light
- Can Be Mounted Almost Anywhere:
- License Plate, Dash Board or Alarm Indicator
- Long Lasting
- Low Consumption Light

PLSVMTBL Blue SUV LED Chrome Exhaust Tip
PLSVMTGR Green SUV LED Chrome Exhaust Tip
PLSVMTPR Purple SUV LED Chrome Exhaust Tip

- Fast and Easy Installation
- Emits A Brilliant Blast of LED Light
- Polished Steel Housing
- SUV Tips Accepts Exhaust w/ 2.85'' Diameter or Smaller
- Dimensions: 8'' Length x 4'' Diameter

PLWFBL1 Single Blue LED Windshield Washer Light
PLWFPR2 Dual Purple LED Windshield Washer Lights
PLWFWT1 Single White LED Windshield Washer Light

- Single Blue LED Windshield Washer Light

1600 63RD STREET
BROOKLYN, N.Y. 11204
718 535-1800
FAX: 718 236-2400